



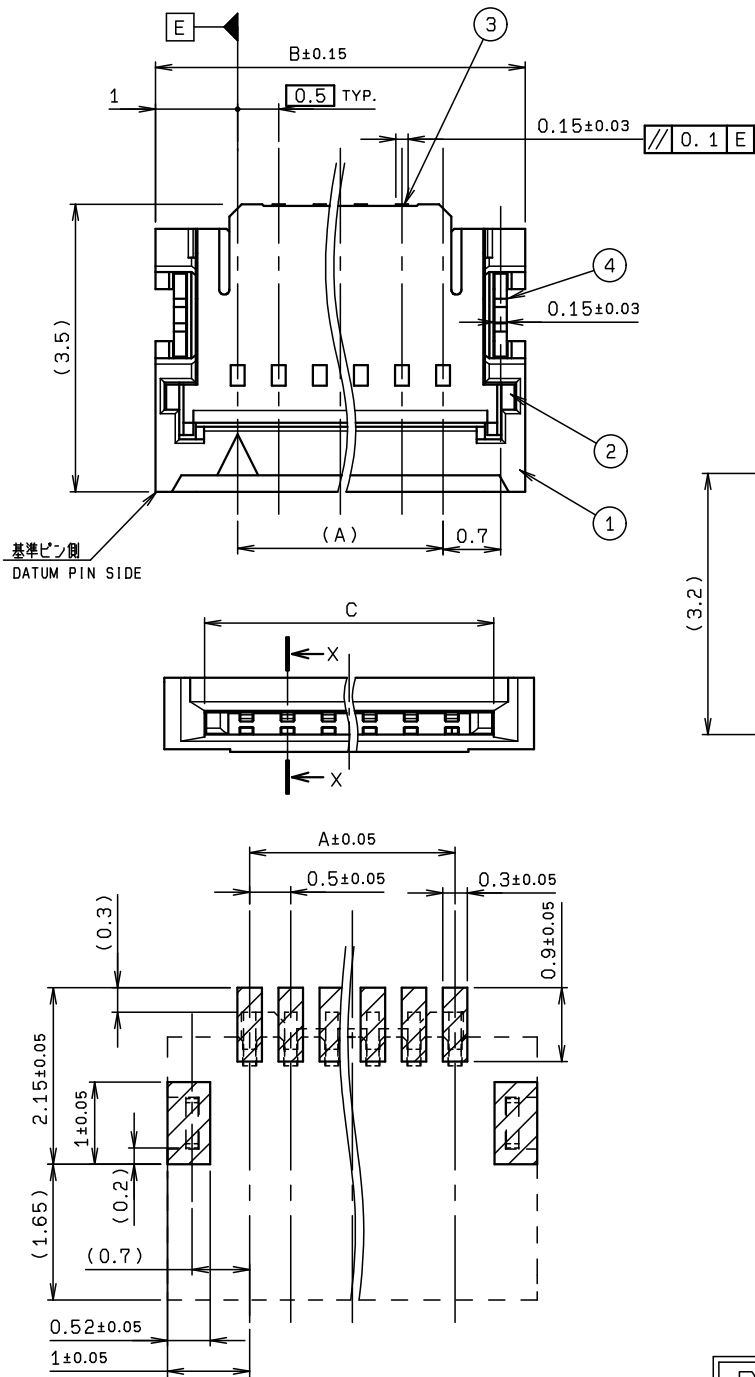

推奨基板取付け寸法
MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR:BLACK
2	ACTUATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR:WHITE
3	CONTACT		N	PHOS-BRONZE		t=0.15 Au:0.1 μ mMIN.
4	ANCHOR PLATE		2	BRASS		t=0.15 Sn-Cu:2 μ mMIN.

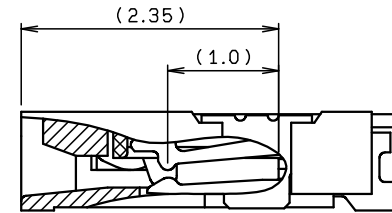

SECT. X-X

種数 NO. OF POS.	A	B	C
3	1.0	3.0	2.1
4	1.5	3.5	2.6
5	2.0	4.0	3.1
6	2.5	4.5	3.6

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

注記
NOTE


① コンタクトテール及び固定金具は基板より
最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE
HEIGHT SHALL BE 0.1MAX.

※この注記は1, 2ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		C	DCN21276	2021/04/05	A. MURATA	N. KITAGAWA	M. YOSHIDA
X < 10 ± 0.2		UNIT		B	DCN18100	2018/02/01	A. MURATA	F. IKEGAMI	Y. FUJII
10 $\leq$ X < 30 ± 0.25		mm		O	EDN-383	2009/08/05	N. KITAGAWA		T. SATOH
30 $\leq$ X ± 0.3		ANGLE		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 $\pm 3^\circ$		SCALE		PART NAME / 品名					
		NTS		SERIES 6277 FPC ASSY RA SMT					
DRAWN		DESIGNED		0.5mm PITCH ZIF TYPE H=0.9mm					
M. TAKAHASHI		N. KITAGAWA							
CHECKED		APPROVED		PART NO. / 製番					
		T. SATOH		04 6277 60X X01 883 +					
				DWG NO. / 図番					
				BJS 6277021					
				SHEET/REV					
				1/3 C					


KYOCERA

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

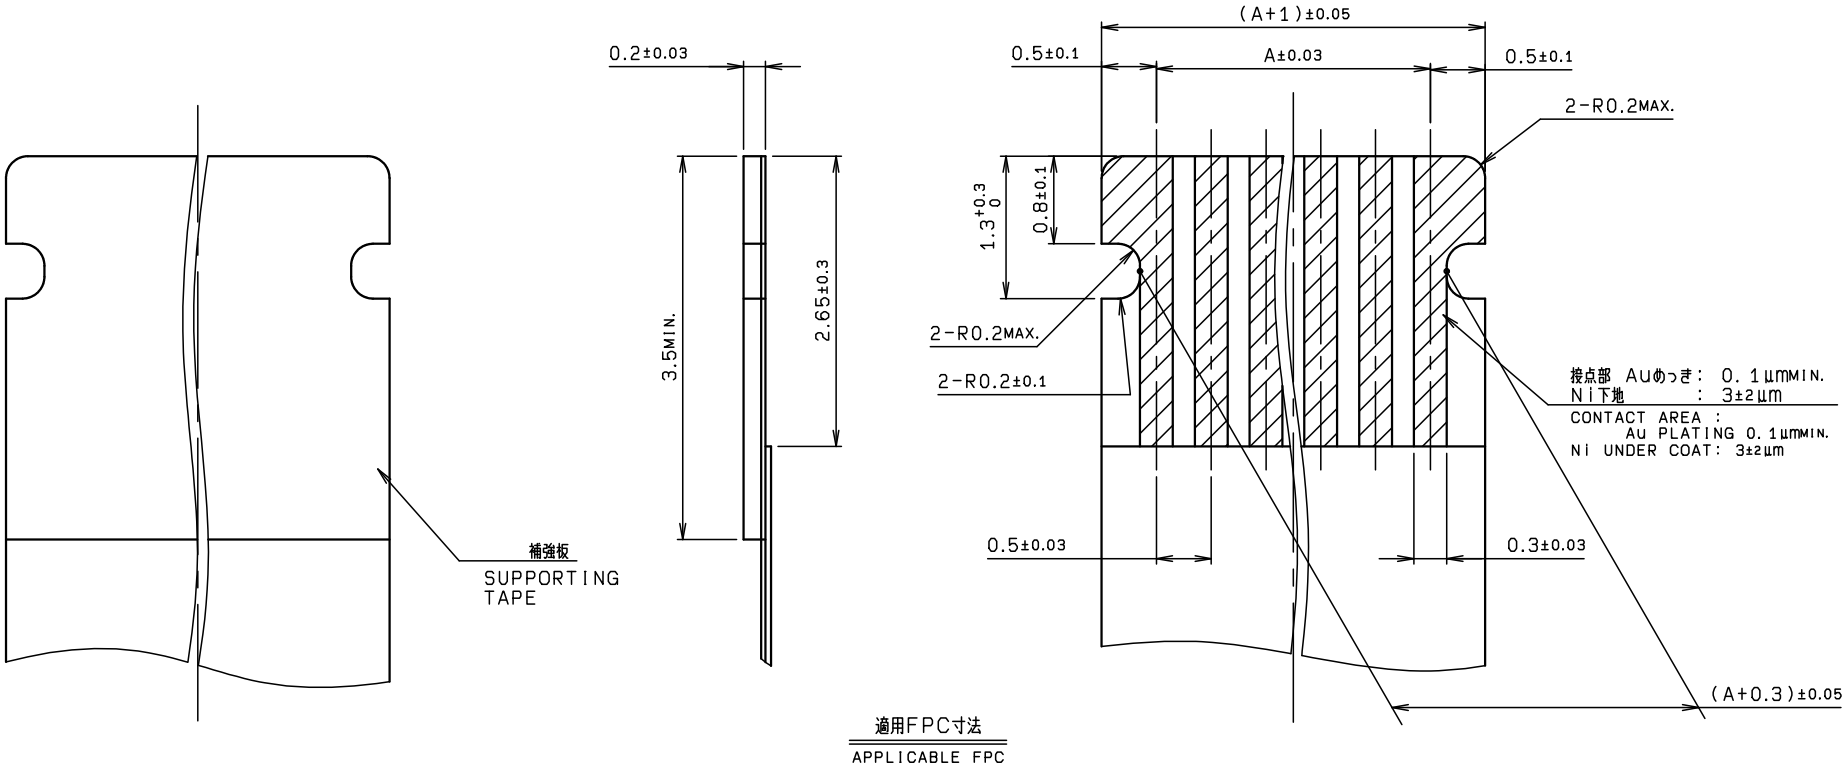

FPC構成
FPC STRUCTURE

(推奨仕様)
(RECOMMENDED SPECIFICATION)

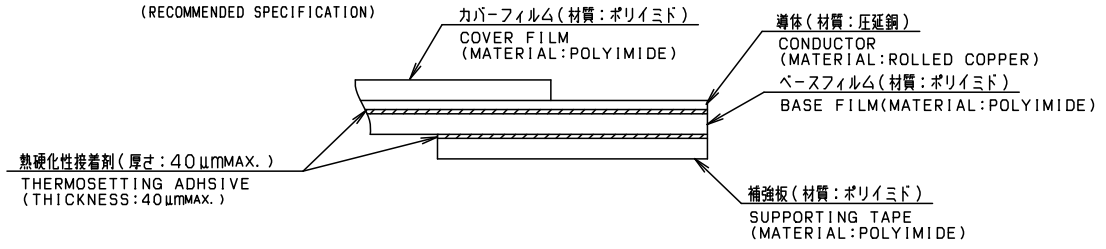


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2		UNIT		ANGLE		REFER		TO SHEET 1/3	
10≤ X <30 ±0.25		mm		3RD		NO.		EDN/DCN	
30≤ X ±0.3						DATE		ISSUE	
ANGLE / 角度		SCALE		DATE		PART NAME / 品名		CHECKED	
±3°		NTS		2009/08/05		SERIES 6277 FPC ASSY RA SMT		APPROVED	
						0.5mm PITCH ZIF TYPE H=0.9mm			
DRAWN		DESIGNED		CHECKED		PART NO. / 製番			
M. TAKAHASHI		N. KITAGAWA				04 6277 60X X01 883 +			
				DWG NO. / 図番				SHEET/REV	
KYOCERA				BJS 6277021				2/3 C	

© 2021 KYOCERA Corporation



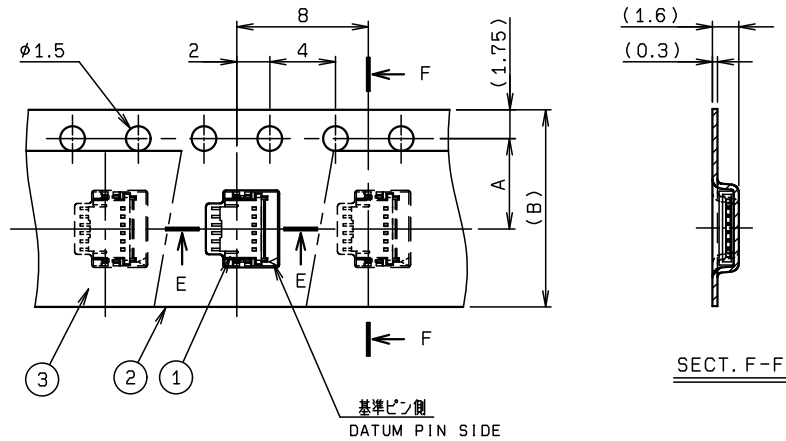

SECT. F-F

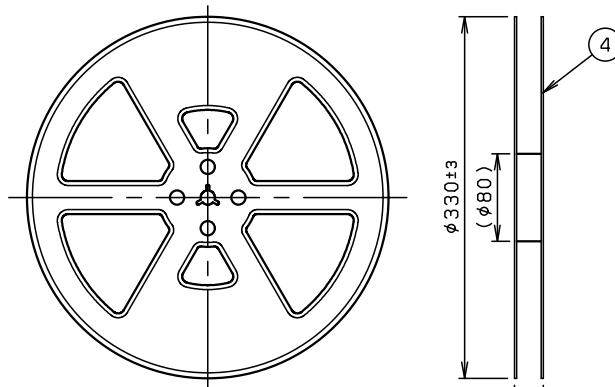SECT. E-E
(S=5:1)

REEL DIMENSION (S=1:5)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6277 60X X01 883 +	3000 OR 5000			00 6277 60X 001 883 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C
3	5.5	12.0	18.4
4	5.5	12.0	18.4
5	5.5	12.0	18.4
6	5.5	12.0	18.4

※この表は3ページ目区のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.


注 記
NOTE

1. 納入数量: 3000 or 5000 個/リール
QUANTITY: 3000 or 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

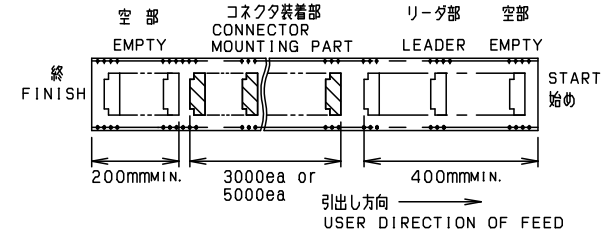

4. 型 番 04 6277 60X X01 883 +
P/N

バリエーション1
VARIATION 1

6: ハロゲンフリー
HALOGEN Free

極 数
NO. OF POS.

梱 包
PACKING

0: 3000 ea/reel
2: 5000 ea/reel

バリエーション2
VARIATION 2

1: STANDARD TYPE

めっきコード

PLATING CODE

883 +: Au(WITH Ni DAM)
(ANCHOR PLATE: Sn-Cu)

※この注記の1～3は3ページ目区のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2		UNIT		ANGLE		REFER TO SHEET		1/3	
10 $\leq$ X < 30 ± 0.25		mm		3RD		NO.		EDN/DCN	DATE
30 $\leq$ X ± 0.3		SCALE		DATE		PART NAME / 品名		ISSUE	CHECKED
ANGLE / 角度 $\pm 3^\circ$		3 : 1		2009/08/05		SERIES 6277 FPC ASSY RA SMT			
DRAWN M. TAKAHASHI		DESIGNED N. KITAGAWA		CHECKED		APPROVED T. SATOH		PART NO. / 製番	
						04 6277 60X X01 883 +			
						DWG NO. / 図番		SHEET/REV	
						BJS 6277021		3/3 C	

KYOCERA