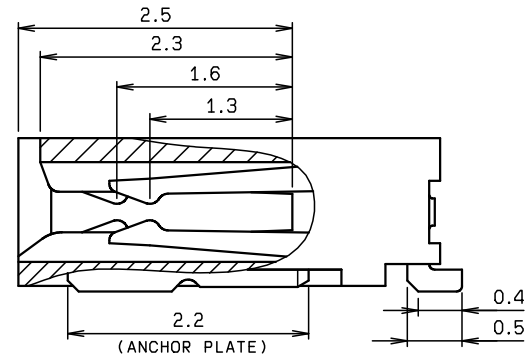
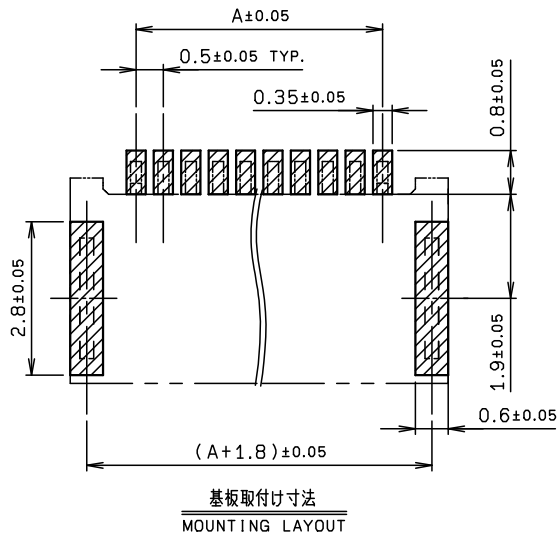
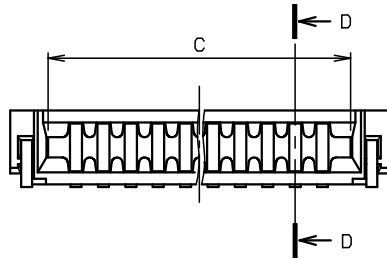
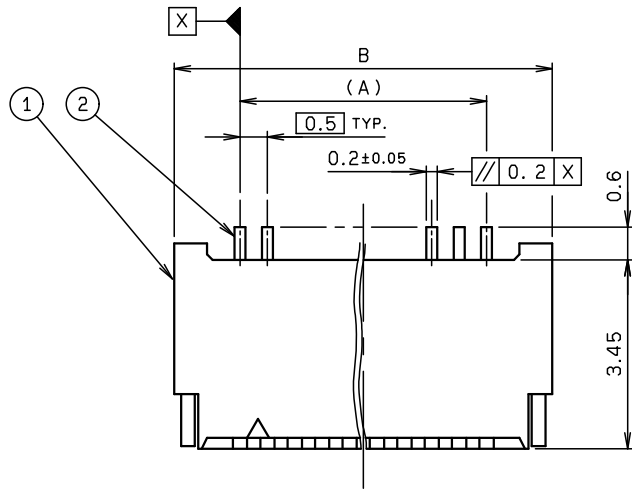
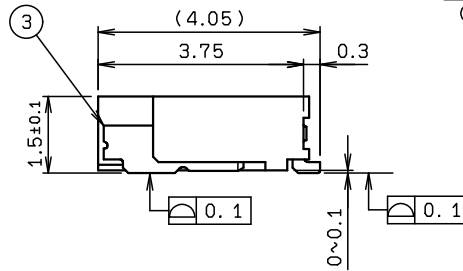


SECT. D-D
(S=20:1)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR: IVORY (NATURAL)
2	CONTACT		N	PHOS-BRONZE		t=0.2 Sn-Cu
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-Cu

極数 NO. OF POS.	A	B	C
5	2.0	4.4	3.1
6	2.5	4.9	3.6
7	3.0	5.4	4.1
8	3.5	5.9	4.6
9	4.0	6.4	5.1
10	4.5	6.9	5.6
11	5.0	7.4	6.1
12	5.5	7.9	6.6
13	6.0	8.4	7.1
14	6.5	8.9	7.6
15	7.0	9.4	8.1
16	7.5	9.9	8.6
17	8.0	10.4	9.1
18	8.5	10.9	9.6
19	9.0	11.4	10.1
20	9.5	11.9	10.6
21	10.0	12.4	11.1
22	10.5	12.9	11.6
23	11.0	13.4	12.1
24	11.5	13.9	12.6
25	12.0	14.4	13.1
26	12.5	14.9	13.6
27	13.0	15.4	14.1
28	13.5	15.9	14.6
29	14.0	16.4	15.1
30	14.5	16.9	15.6

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN20662	2020/07/01	A. MURATA	N. KITAGAWA	M. YOSHIDA
X < 10 ±0.2				C	DCN19786	2019/08/07	Y. SANPEI	N. KITAGAWA	Y. FIJII
10 ≤ X < 30 ±0.25				O	EDN-1050	2004/09/24	K. MATAGA	A. HAGIWARA	N. HAYASHI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 10:1		PART NAME / 品名					
DRAWN T. KOMATSU		DESIGNED K. MATAGA		SERIES 6284 FPC FFC ASSY					
		CHECKED A. HAGIWARA		0.5mm PITCH CONNECTOR H=1.5 LIF TYPE					
		APPROVED N. HAYASHI		PART NO. / 製番					
				04 6284 0XX 001 800 +					
				DWG NO. / 図番					
				BJS 6284002					
				SHEET/REV					
				1/3 D					

KYOCERA

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------


注 記
NOTE

1. コンタクトテール及び固定金具は基板より最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT SHALL BE 0.1MAX.

② 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC FROM 1 OR 2.

※この注記は1, 2ページ目区のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.


	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
WD	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

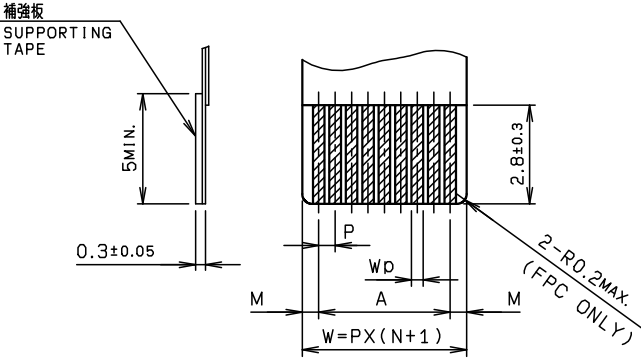

適用FPC/FFC寸法
APPLICABLE FPC/FFC


FPC構成
FPC STRUCTURE
(推奨仕様)

熱硬化性接着剤(厚さ:40μmMAX.)
THERMOSETTING ADHESIVE
(THICKNESS:40μmMAX.)

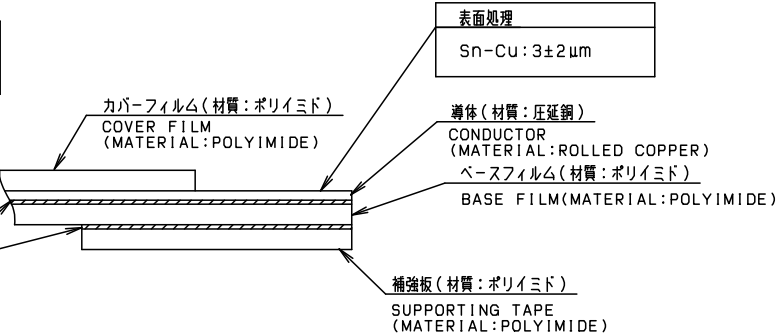


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3		UNIT		ANGLE		REFER TO SHEET		1/3		
		mm		3RD						
						NO.		EDN/DCN		
						DATE		ISSUE		
ANGLE / 角度		SCALE		DATE		PART NAME / 品名				
±3°		NTS		2004/09/24		SERIES 6284 FPC FFC ASSY				
						0.5mmPITCH CONNECTOR H=1.5 LIF TYPE				
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番						
T. KOMATSU	K. MATAGA	A. HAGIWARA	N. HAYASHI	04 6284 0XX 001 800 +						
KYOCERA				DWG NO. / 図番					SHEET/REV	
				BJS 6284002					2/3 D	


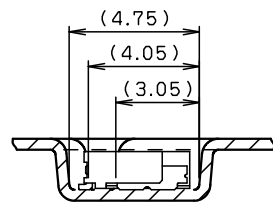


SECT. F-F (S=5:1)



RoHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

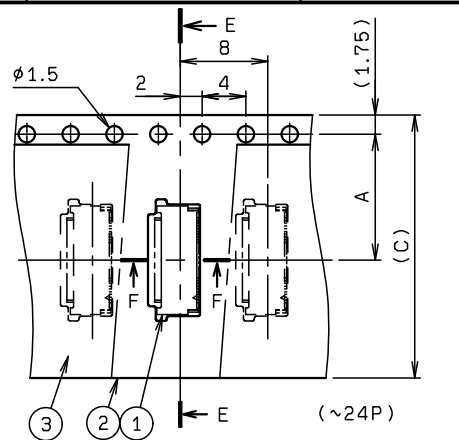


SECT. E-E
(~24P)

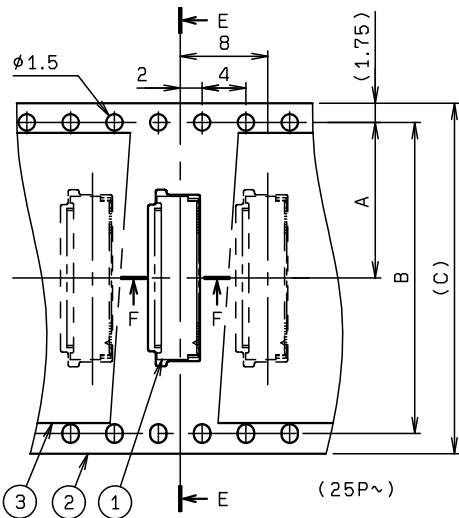

SECT. E-E
(25P~)

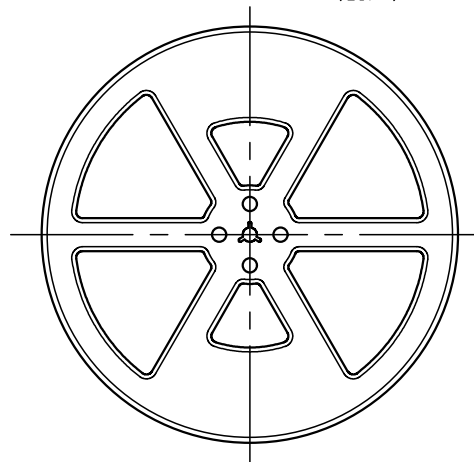

REEL DIMENSION (S=1:5)

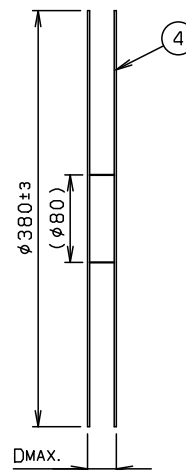

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6284 0XX 001 800 +	4000			00 6284 0XX 001 800 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極數 NO. OF POS.	A	B	C	D
5	7.5	-	16.0	22.4
6	7.5	-	16.0	22.4
7	7.5	-	16.0	22.4
8	7.5	-	16.0	22.4
9	11.5	-	24.0	30.4
10	11.5	-	24.0	30.4
11	11.5	-	24.0	30.4
12	11.5	-	24.0	30.4
13	11.5	-	24.0	30.4
14	11.5	-	24.0	30.4
15	11.5	-	24.0	30.4
16	11.5	-	24.0	30.4
17	11.5	-	24.0	30.4
18	11.5	-	24.0	30.4
19	11.5	-	24.0	30.4
20	11.5	-	24.0	30.4
21	11.5	-	24.0	30.4
22	11.5	-	24.0	30.4
23	11.5	-	24.0	30.4
24	11.5	-	24.0	30.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4

※この表は3ページ目にも適用


※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

注 記
NOTE

1. 梱包数量 : 4000 個/リール
PACKING QUANTITY : 4000 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED.

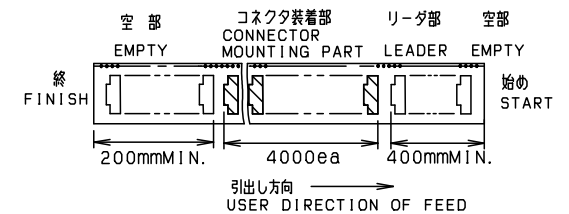

4. 型番
P/N 04 6284 0XX 001 800 +
- 極数
NO. OF POS.
- めっき
PLATING
+: Sn-Cu

※この注記の1～3は3ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ $30 \leq X$		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3			
± 0.2 ± 0.25 ± 0.3		SCALE 3 : 1		DATE 2004/09/24		PART NAME / 品名 SERIES 6284 EMOSS TAPE ASSY RA SMT FPC/FPC ASSY			
ANGLE / 角度 $\pm 3^\circ$		DRAWN T. KOMATSU		DESIGNED K. MATAGA		CHECKED A. HAGIWARA		APPROVED N. HAYASHI	
		DWG NO. / 図番 BJS 6284002		SHEET/REV 3/3		D			