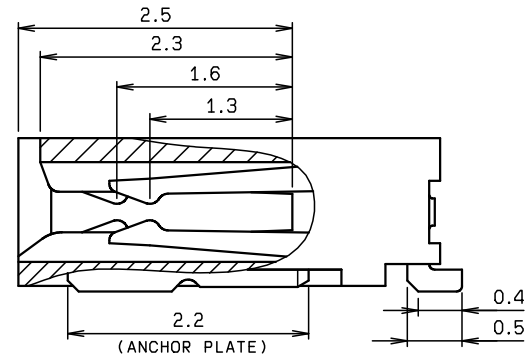
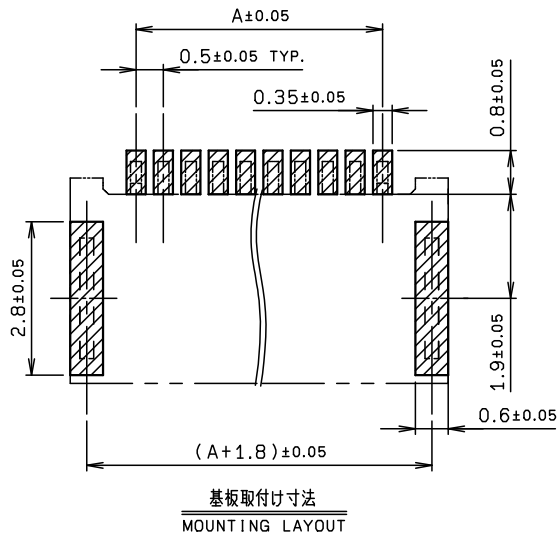
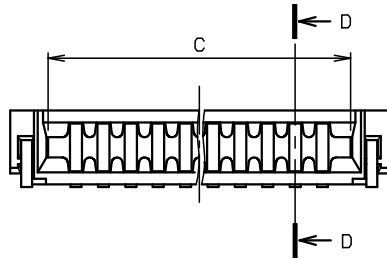
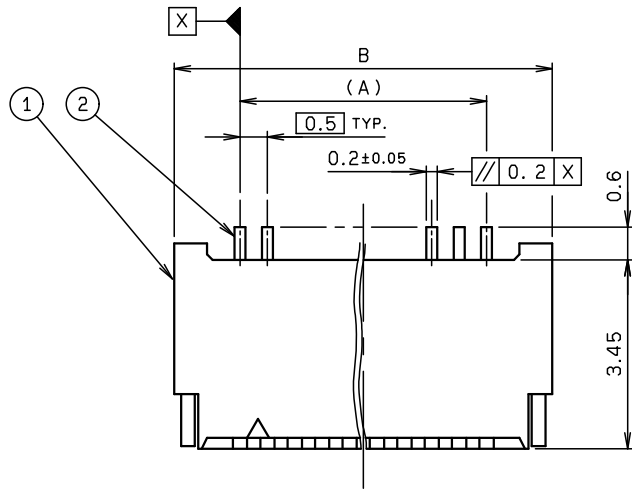
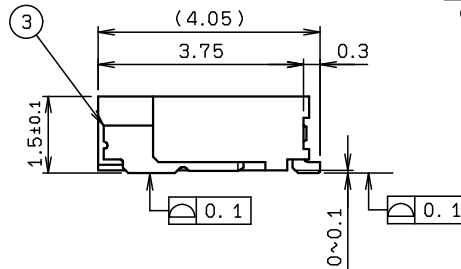


SECT. D-D
(S=20:1)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR: IVORY (NATURAL)
2	CONTACT		N	PHOS-BRONZE		t=0.2 AU
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-CU

極 数 NO. OF POS.	A	B	C
5	2.0	4.4	3.1
6	2.5	4.9	3.6
7	3.0	5.4	4.1
8	3.5	5.9	4.6
9	4.0	6.4	5.1
10	4.5	6.9	5.6
11	5.0	7.4	6.1
12	5.5	7.9	6.6
13	6.0	8.4	7.1
14	6.5	8.9	7.6
15	7.0	9.4	8.1
16	7.5	9.9	8.6
17	8.0	10.4	9.1
18	8.5	10.9	9.6
19	9.0	11.4	10.1
20	9.5	11.9	10.6
21	10.0	12.4	11.1
22	10.5	12.9	11.6
23	11.0	13.4	12.1
24	11.5	13.9	12.6
25	12.0	14.4	13.1
26	12.5	14.9	13.6
27	13.0	15.4	14.1
28	13.5	15.9	14.6
29	14.0	16.4	15.1
30	14.5	16.9	15.6

※この表は1, 2ページ目へのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		B	DCN20662	2020/07/01	A. MURATA	N. KITAGAWA	M. YOSHIDA
X < 10 ±0.2				A	DCN-004	2008/01/08	K. MURAKAMI		T. SATOH
10 ≤ X < 30 ±0.25		UNIT		O	EDN-1075	2005/08/25	N. KITAGAWA	A. HAGIWARA	N. HAYASHI
30 ≤ X ±0.3		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		3RD		PART NAME / 品名					
±3°		SCALE		SERIES 6284 FPC FFC ASSY RA SMT					
DRAWN		DATE		0.5mm PITCH LIF TYPE H=1.5 AU PLATING					
T. KOMATSU		2005/08/25							
DESIGNED		PART NO. / 製番		04 6284 0XX 001 XXX +					
N. KITAGAWA		CHECKED		DWG NO. / 図番					
A. HAGIWARA		APPROVED		BJS 6284012					
N. HAYASHI		KYOCERA		SHEET/REV					
				1/3 B					

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

注 記
NOTE


1. コンタクトテール及び固定金具は基板より最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT SHALL BE 0.1MAX.

② 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC FROM 1 OR 2.

※この注記は1, 2ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

②

	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
Wp	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

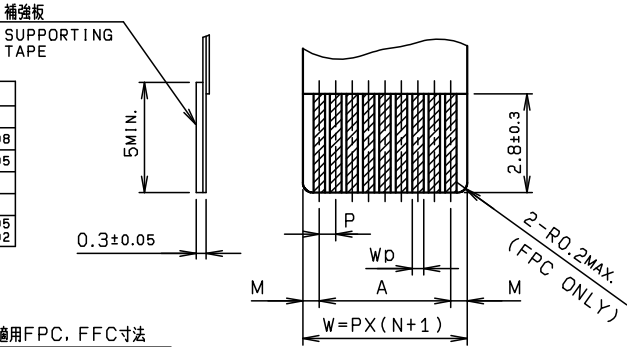

適用FPC, FFC寸法
APPLICABLE FPC, FFC

FPC構成
FPC STRUCTURE
(推奨仕様)

表面処理
Auめっき: 0.1~0.2μm
Au PLATING: 0.1~0.2μm

カバーフィルム (材質: ポリイミド)
COVER FILM
(MATERIAL: POLYIMIDE)

導体 (材質: 圧延銅)
CONDUCTOR
(MATERIAL: ROLLED COPPER)






ベースフィルム (材質: ポリイミド)
BASE FILM (MATERIAL: POLYIMIDE)

熱硬化性接着剤 (厚さ: 40μmMAX.)
THERMOSETTING ADHESIVE
(THICKNESS: 40μmMAX.)


補強板 (材質: ポリイミド)
SUPPORTING TAPE
(MATERIAL: POLYIMIDE)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格											
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT		ANGLE	REFER TO SHEET		1/3						
		mm		3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED			
		SCALE		DATE	PART NAME / 品名								
ANGLE / 角度 ±3°		NTS		2005/08/25	SERIES 6284 FPC FFC ASSY RA SMT 0.5mm PITCH LIF TYPE H=1.5 AU PLATING								
		DRAWN		DESIGNED	CHECKED	APPROVED	PART NO. / 型番						
T. KOMATSU		N. KITAGAWA		A. HAGIWARA	N. HAYASHI					04 6284 0XX 001 XXX +			
					DWG NO. / 図番					SHEET/REV			
					BJS 6284012					2/3 B			

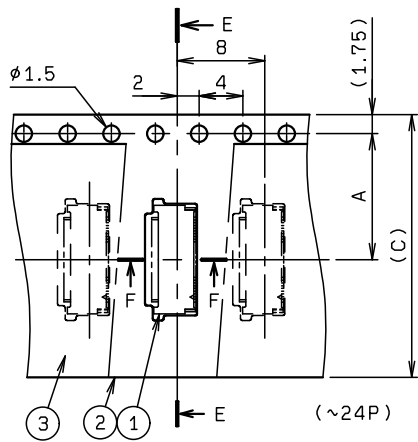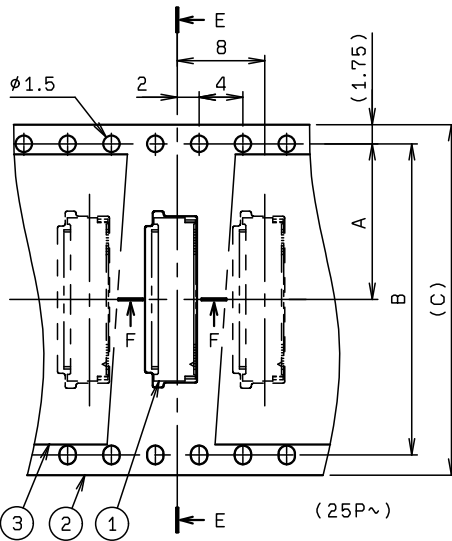SECT. E-E
(~24P)SECT. E-E
(25P~)

SECT. F-F (S=5:1)

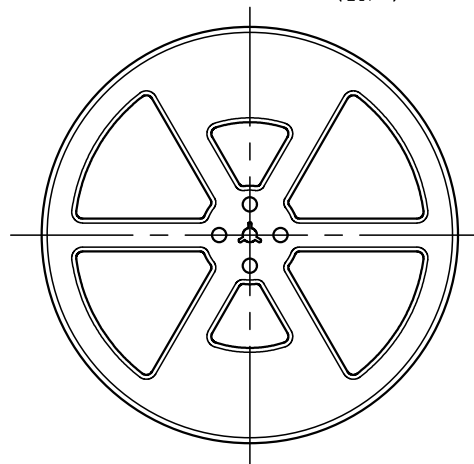



REEL DIMENSION (S=1:5)

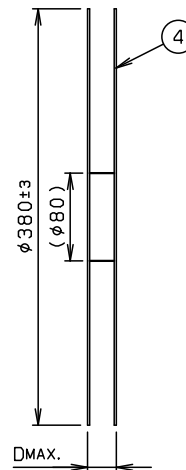

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6284 0XX 001 XXX +	4000			00 6284 0XX 001 XXX +
2	EMBOSSD TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

極数 NO. OF POS.	A	B	C	D
5	7.5	—	16.0	22.4
6	7.5	—	16.0	22.4
7	7.5	—	16.0	22.4
8	7.5	—	16.0	22.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
13	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
15	11.5	—	24.0	30.4
16	11.5	—	24.0	30.4
17	11.5	—	24.0	30.4
18	11.5	—	24.0	30.4
19	11.5	—	24.0	30.4
20	11.5	—	24.0	30.4
21	11.5	—	24.0	30.4
22	11.5	—	24.0	30.4
23	11.5	—	24.0	30.4
24	11.5	—	24.0	30.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4

※この表は3ページ目のみ適用

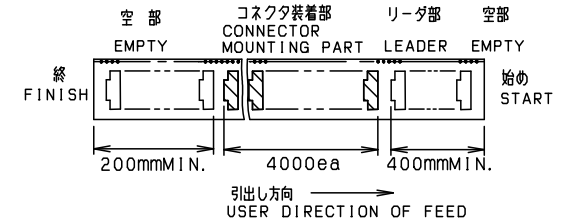※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.注 記
NOTE1. 梱包数量 : 4000 個/リール
PACKING QUANTITY : 4000 ea/reel2. 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY3. 引出し方向
USER DIRECTION OF FEED.4. 型番
P/N 04 6284 0XX 001 XXX +極数
NO. OF POS.

めっきコード

PLATING CODE

868+:Au FLASH WITH Ni-DAM
(ANCHOR PLATE:Sn-Cu)846+:Au(SELECTIVE)
(ANCHOR PLATE:Sn-Cu)

※この注記の1~3は3ページ目のみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET		1/3	
10 ≤ X < 30 ±0.25		mm		3RD		NO.		DATE	
30 ≤ X ±0.3		SCALE		DATE		ISSUE		CHECKED	
ANGLE / 角度 ±3°		3 : 1		2005/08/25		APPROVED		APPROVED	
DRAWN T. KOMATSU		DESIGNED N. KITAGAWA		CHECKED A. HAGIWARA		APPROVED N. HAYASHI		PART NO. / 型番	
								04 6284 0XX 001 XXX +	
								DWG NO. / 図番	
								BJS 6284012	
								SHEET/REV	
								3/3 B	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA