


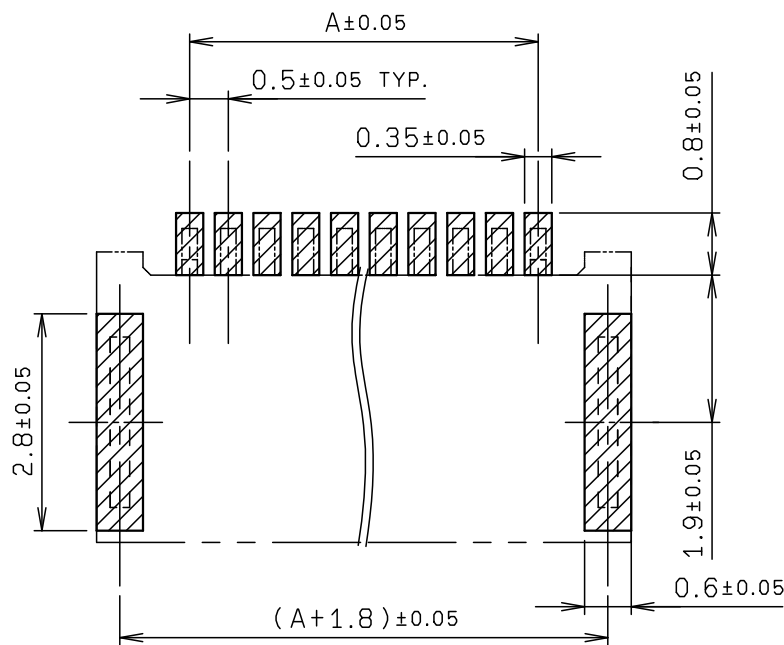
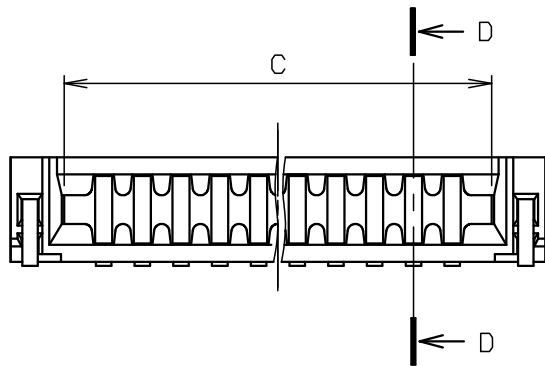


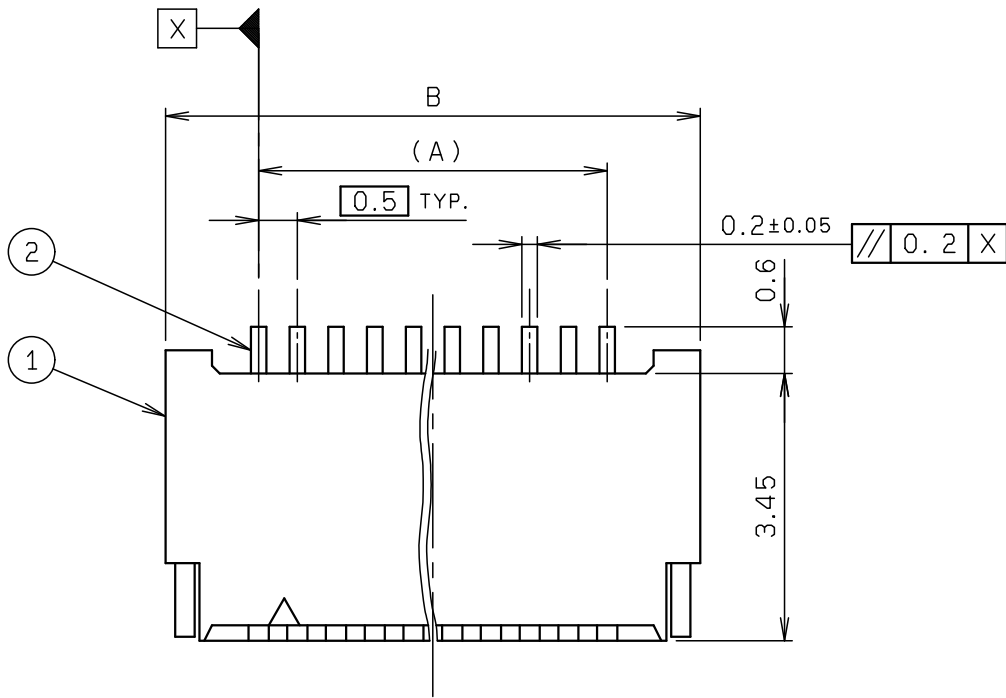

基板取付け寸法
MOUNTING LAYOUT

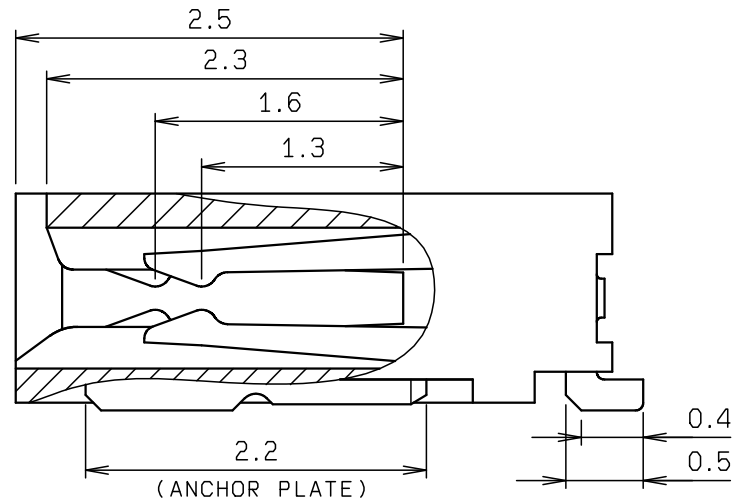

SECT. D-D
(S=20:1)

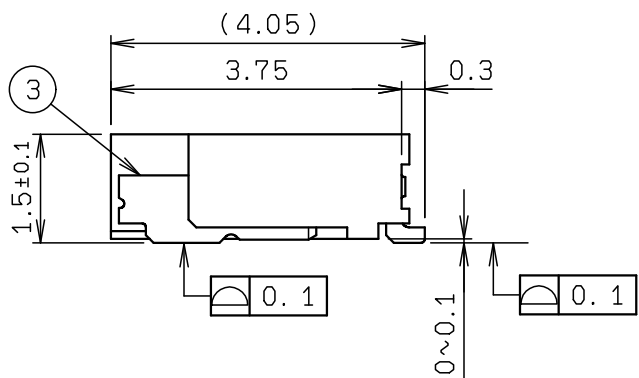

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR: IVORY (NATURAL)
2	CONTACT		N	PHOS-BRONZE		t=0.2 Au
3	ANCHOR PLATE		2	BRASS		t=0.2 Sn-Cu

極 数 NO. OF POS.	A	B	C
5	2.0	4.4	3.1
6	2.5	4.9	3.6
7	3.0	5.4	4.1
8	3.5	5.9	4.6
9	4.0	6.4	5.1
10	4.5	6.9	5.6
11	5.0	7.4	6.1
12	5.5	7.9	6.6
13	6.0	8.4	7.1
14	6.5	8.9	7.6
15	7.0	9.4	8.1
16	7.5	9.9	8.6
17	8.0	10.4	9.1
18	8.5	10.9	9.6
19	9.0	11.4	10.1
20	9.5	11.9	10.6
21	10.0	12.4	11.1
22	10.5	12.9	11.6
23	11.0	13.4	12.1
24	11.5	13.9	12.6
25	12.0	14.4	13.1
26	12.5	14.9	13.6
27	13.0	15.4	14.1
28	13.5	15.9	14.6
29	14.0	16.4	15.1
30	14.5	16.9	15.6

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		D	DCN22066	2022/01/31	N. KITAGAWA	N. NAKAJIMA	A. TSUNEMURA
X < 10 ±0.2				C	DCN20662	2020/07/01	A. MURATA	N. KITAGAWA	M. YOSHIDA
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-622	2008/09/10	K. MURAKAMI	A. TSUNEMURA	T. SATOH
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 3 : 1		PART NAME / 品名					
		DATE 2008/09/10		SERIES 6284 FPC FFC ASSY RA SMT					
DRAWN M. TAKAHASHI		DESIGNED K. MURAKAMI		0.5mm PITCH LIF TYPE H=1.5 AU PLATING					
CHECKED A. TSUNEMURA		APPROVED T. SATOH		PART NO. / 型番					
				04 6284 OXX 002 XXX +					
				DWG NO. / 図番					
				BJS 6284024					
				SHEET / REV					
				1 / 3 D					


KYOCERA

注 記
NOTE

1. コンタクトテール及び固定金具は基板より
最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE
HEIGHT SHALL BE 0.1MAX.
- ② 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE
FPC/FFC FROM 1 OR 2.



※この注記は1, 2ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

	FPC		FFC	
	1	2	1	2
M	0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P	0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05	A±0.03	A±0.05
W	W±0.07	W±0.07	W±0.07	W±0.07
Wp	0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

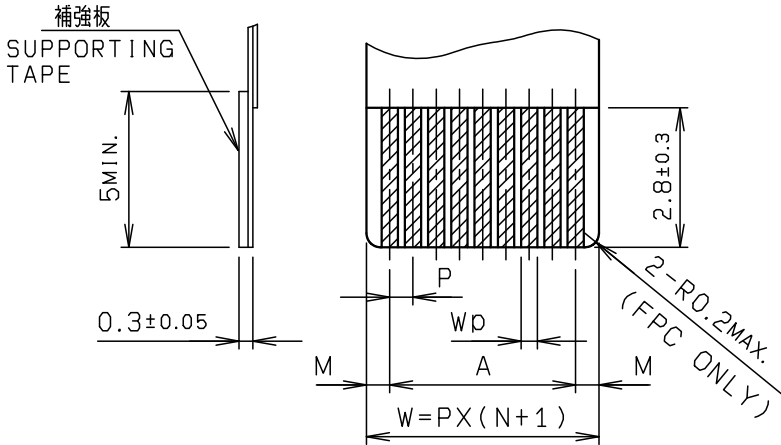



適用FPC/FFC寸法
APPLICABLE FPC/FFC

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

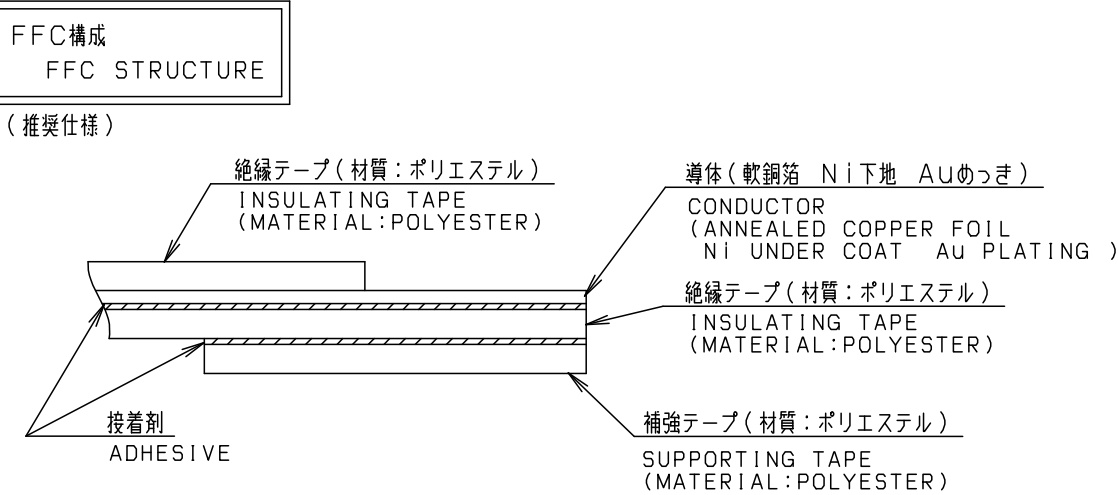
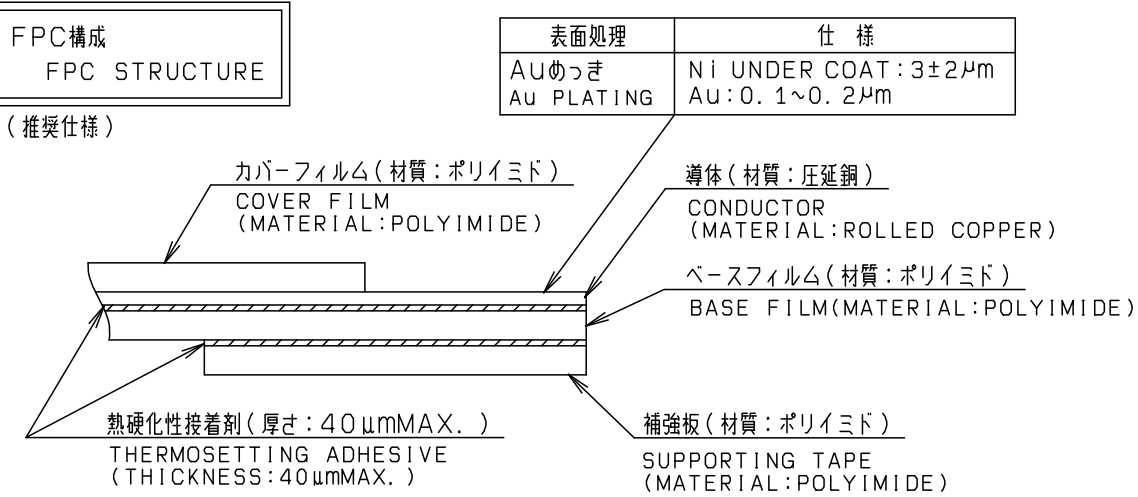


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格															
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		REFER		TO SHEET 1/2									
						NO.		EDN/DCN		DATE		ISSUE		CHECKED		APPROVED	
						PART NAME / 品名											
ANGLE / 角度 ±3°		SCALE NTS		DATE 2008/09/10		SERIES 6284 FPC FFC ASSY RA SMT											
						0.5mm PITCH LIF TYPE H=1.5 Au PLATING											
DRAWN M. TAKAHASHI		DESIGNED K. MURAKAMI		CHECKED A. TSUNEMURA		APPROVED T. SATOH		PART NO. / 型番 04 6284 0XX 002 XXX +									
						DWG NO. / 図番 BJS 6284024						SHEET/REV 2/3		D			

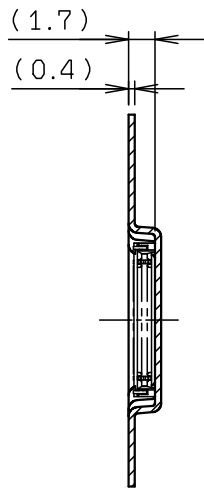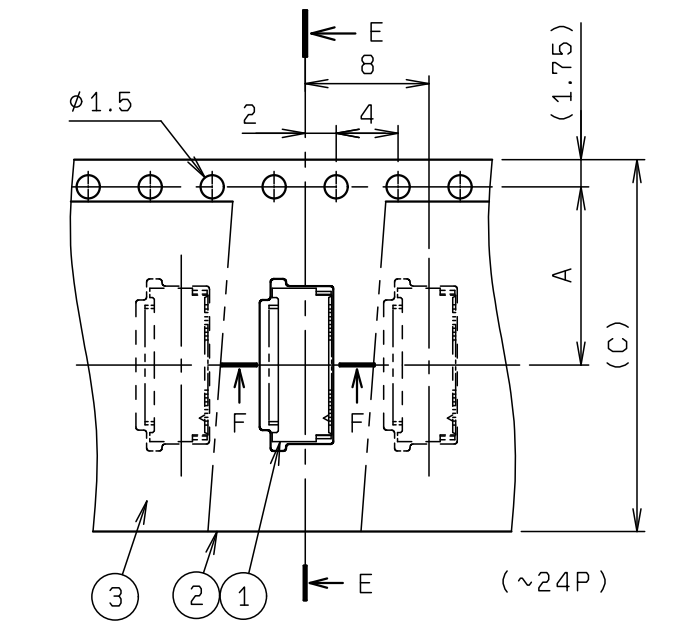


SECT. E-E
(~24P)

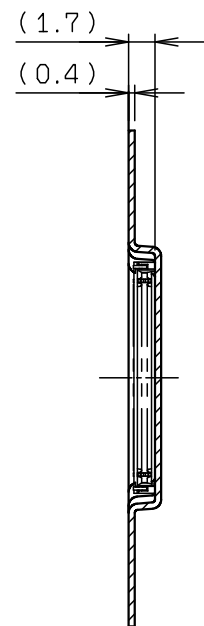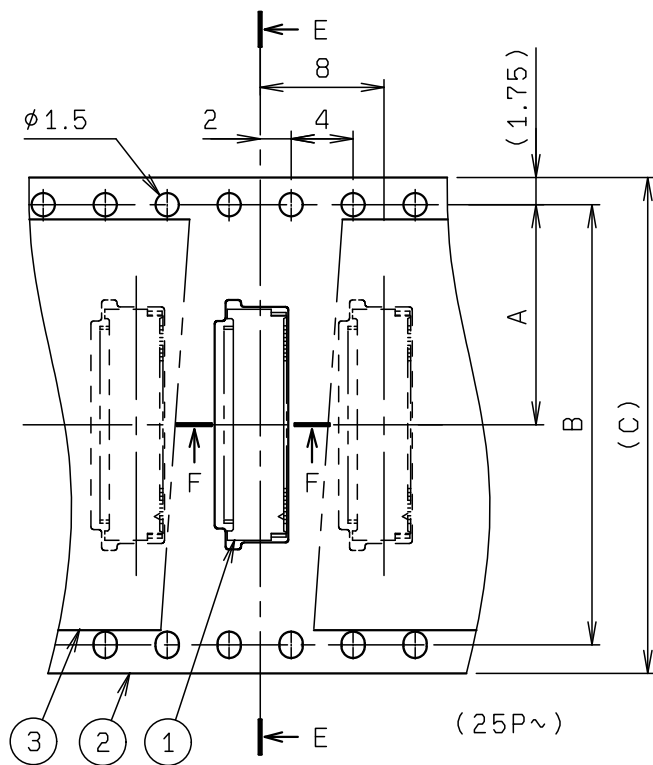


SECT. E-E
(25P~)

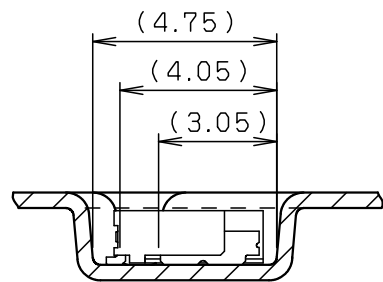

SECT. F-F (S=5:1)

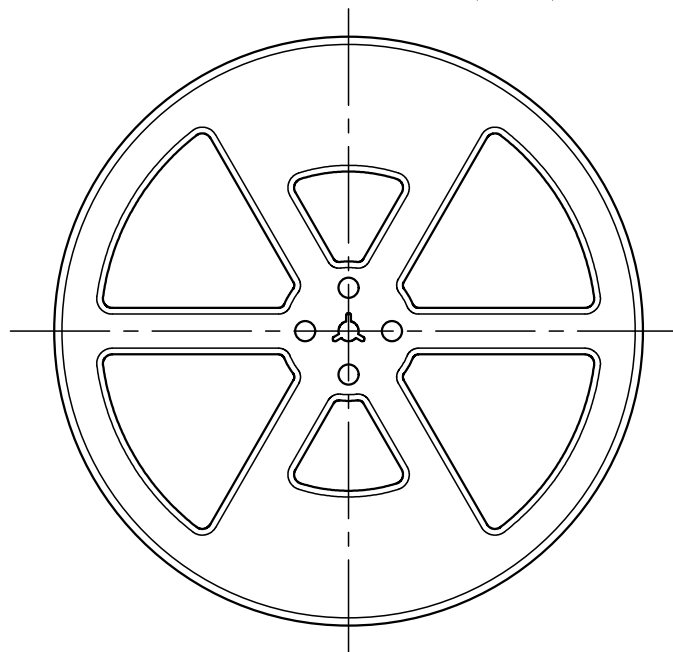

REEL DIMENSION (S=1:5)

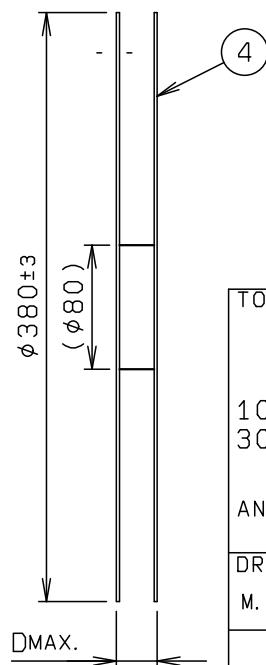

DMAX.


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6284 0XX 002 XXX +	4000			00 6284 0XX 002 XXX +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

極 数 NO. OF POS.	A	B	C	D
5	7.5	—	16.0	22.4
6	7.5	—	16.0	22.4
7	7.5	—	16.0	22.4
8	7.5	—	16.0	22.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
13	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
15	11.5	—	24.0	30.4
16	11.5	—	24.0	30.4
17	11.5	—	24.0	30.4
18	11.5	—	24.0	30.4
19	11.5	—	24.0	30.4
20	11.5	—	24.0	30.4
21	11.5	—	24.0	30.4
22	11.5	—	24.0	30.4
23	11.5	—	24.0	30.4
24	11.5	—	24.0	30.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4


※この表は3ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

注 記
NOTE

- 梱包数量 : 4000 個/リール
PACKING QUANTITY : 4000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY

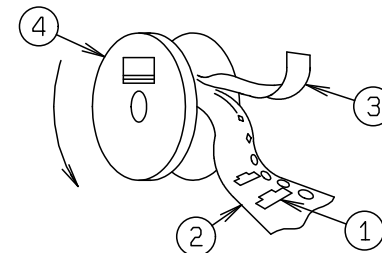

- 引出し方向
USER DIRECTION OF FEED.

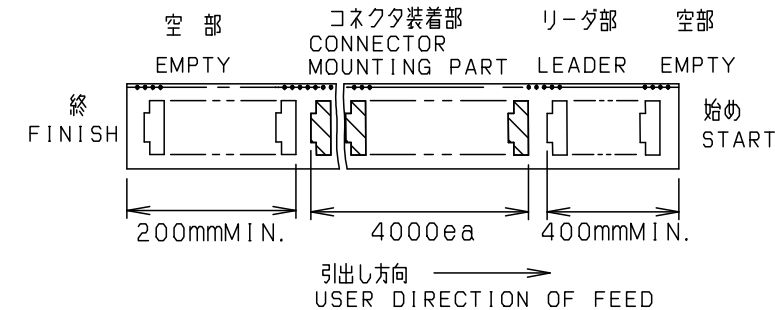

- 型 番
P/N 04 6284 0XX 002 XXX +
極 数
NO. OF POS. _____
めっきコート*
PLATING CODE
846+:Au(SELECTIVE)
(ANCHOR PLATE:Sn-Cu)
868+:Au FLASH WITH Ni DAM
(ANCHOR PLATE:Sn-Cu)

※この注記の1~3は3ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格									
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	ANGLE / 角度 ±3°	UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3					
		SCALE 2 : 1		DATE 2008/09/10		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		PART NAME / 品名 SERIES 6284 EMBOSS TAPE ASSY FPC FFC ASSY RA SMT AU PLATING									
DRAWN M. TAKAHASHI	DESIGNED K. MURAKAMI	CHECKED A. TSUNEMURA		APPROVED T. SATOH		PART NO. / 型番 04 6284 0XX 002 XXX +					
					DWG NO. / 図番 BJS 6284024				SHEET/REV 13/3 D		

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS