


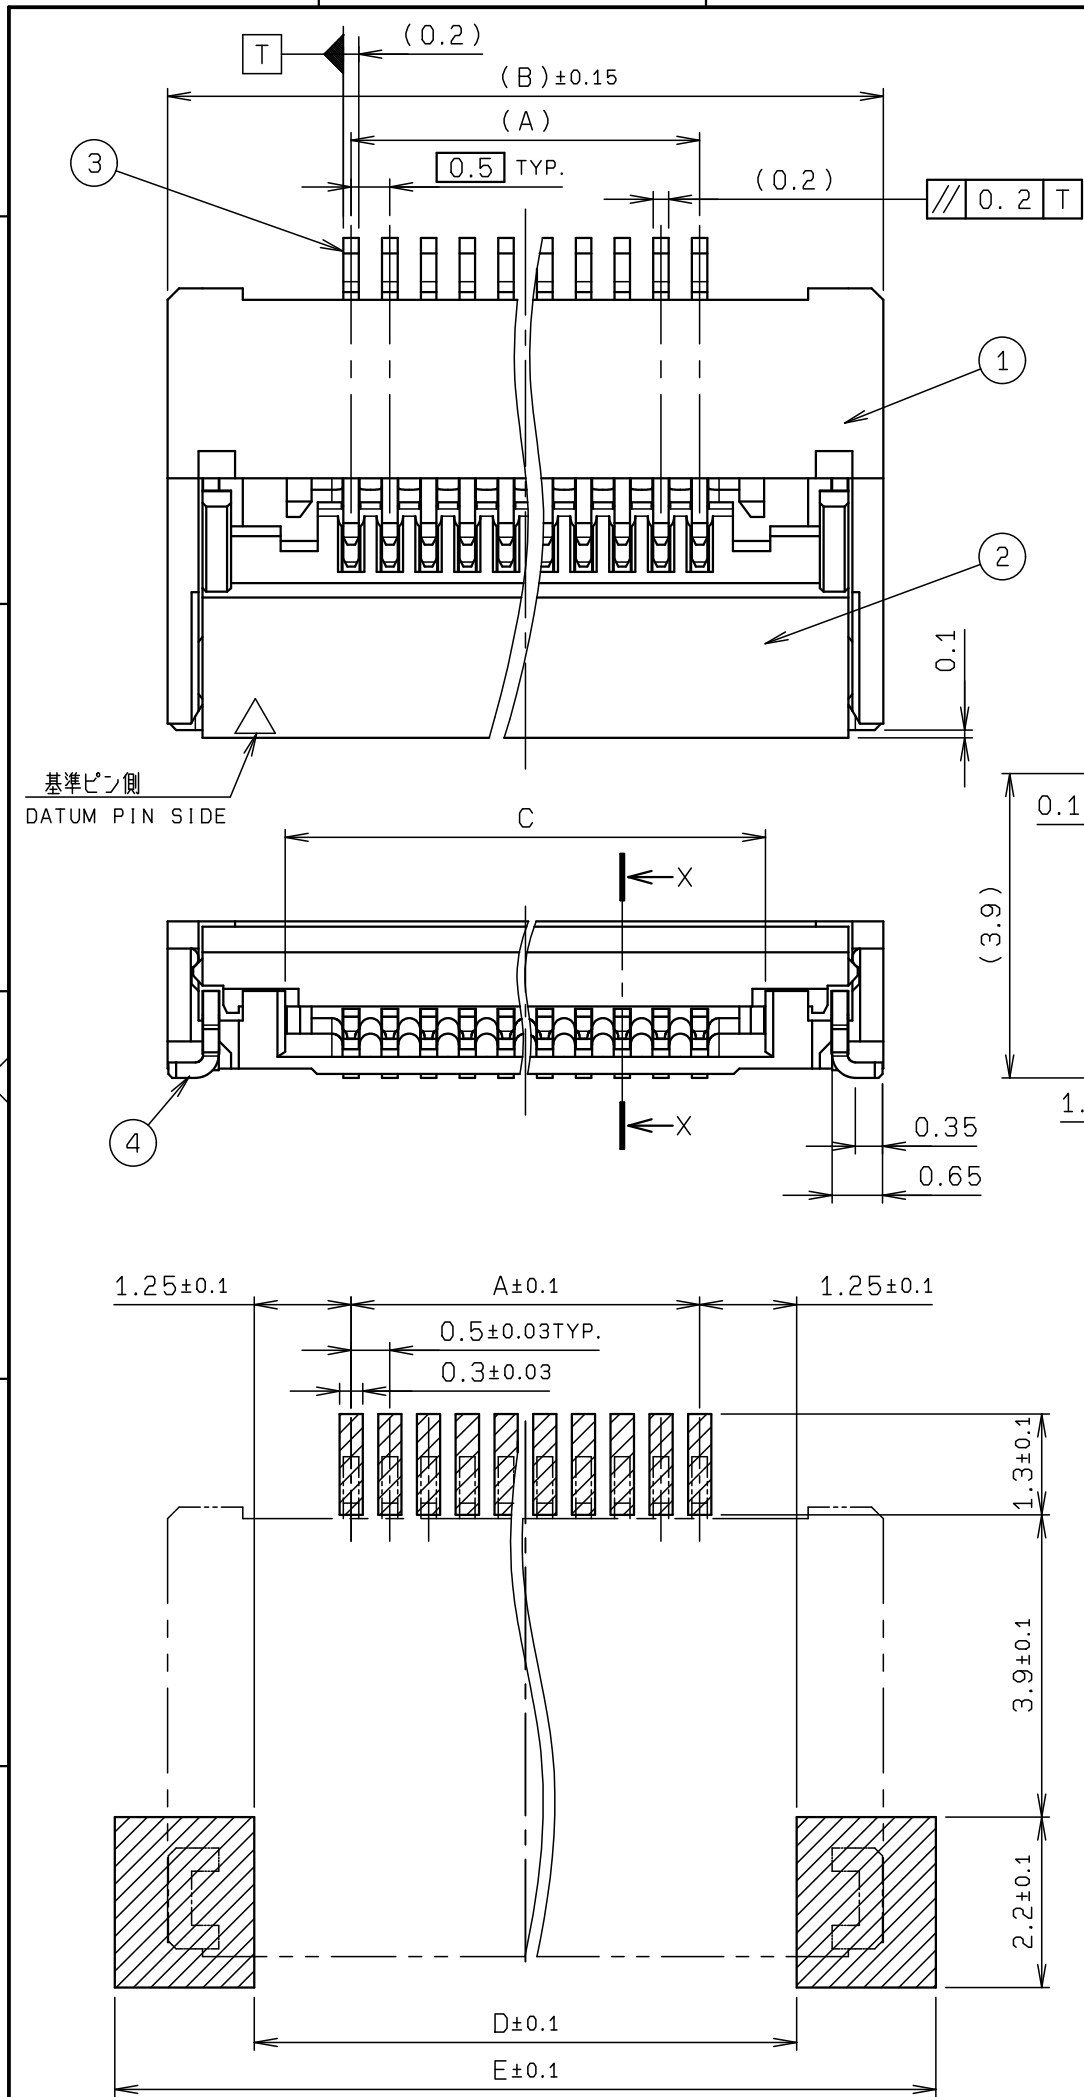

| NO. | DESCRIPTION  | PART NO. | QTY | MATERIAL    | DRW NO. | REMARKS                 |
|-----|--------------|----------|-----|-------------|---------|-------------------------|
| 1   | INSULATOR    |          | 1   | LCP         |         | COLOR: IVORY<br>UL94V-0 |
| 2   | ACTUATOR     |          | 1   | PA6T        |         | COLOR: BLACK<br>UL94V-0 |
| 3   | CONTACT      |          | N   | PHOS-BRONZE |         | t=0.2                   |
| 4   | ANCHOR PLATE |          | 2   | PHOS-BRONZE |         | t=0.2                   |

| 極 数<br>NO. OF POS. | A    | B     | C    | D    | E    |
|--------------------|------|-------|------|------|------|
| 8                  | 3.5  | 8.24  | 5.2  | 6.0  | 9.6  |
| 9                  | 4.0  | 8.74  | 5.7  | 6.5  | 10.1 |
| 10                 | 4.5  | 9.24  | 6.2  | 7.0  | 10.6 |
| 11                 | 5.0  | 9.74  | 6.7  | 7.5  | 11.1 |
| 12                 | 5.5  | 10.24 | 7.2  | 8.0  | 11.6 |
| 13                 | 6.0  | 10.74 | 7.7  | 8.5  | 12.1 |
| 14                 | 6.5  | 11.24 | 8.2  | 9.0  | 12.6 |
| 15                 | 7.0  | 11.74 | 8.7  | 9.5  | 13.1 |
| 16                 | 7.5  | 12.24 | 9.2  | 10.0 | 13.6 |
| 17                 | 8.0  | 12.74 | 9.7  | 10.5 | 14.1 |
| 18                 | 8.5  | 13.24 | 10.2 | 11.0 | 14.6 |
| 19                 | 9.0  | 13.74 | 10.7 | 11.5 | 15.1 |
| 20                 | 9.5  | 14.24 | 11.2 | 12.0 | 15.6 |
| 21                 | 10.0 | 14.74 | 11.7 | 12.5 | 16.1 |
| 22                 | 10.5 | 15.24 | 12.2 | 13.0 | 16.6 |
| 23                 | 11.0 | 15.74 | 12.7 | 13.5 | 17.1 |
| 24                 | 11.5 | 16.24 | 13.2 | 14.0 | 17.6 |
| 25                 | 12.0 | 16.74 | 13.7 | 14.5 | 18.1 |
| 26                 | 12.5 | 17.24 | 14.2 | 15.0 | 18.6 |
| 27                 | 13.0 | 17.74 | 14.7 | 15.5 | 19.1 |
| 28                 | 13.5 | 18.24 | 15.2 | 16.0 | 19.6 |
| 29                 | 14.0 | 18.74 | 15.7 | 16.5 | 20.1 |
| 30                 | 14.5 | 19.24 | 16.2 | 17.0 | 20.6 |

| 極 数<br>NO. OF POS. | A    | B     | C    | D    | E    |
|--------------------|------|-------|------|------|------|
| 31                 | 15.0 | 19.74 | 16.7 | 17.5 | 21.1 |
| 32                 | 15.5 | 20.24 | 17.2 | 18.0 | 21.6 |
| 33                 | 16.0 | 20.74 | 17.7 | 18.5 | 22.1 |
| 34                 | 16.5 | 21.24 | 18.2 | 19.0 | 22.6 |
| 35                 | 17.0 | 21.74 | 18.7 | 19.5 | 23.1 |
| 36                 | 17.5 | 22.24 | 19.2 | 20.0 | 23.6 |
| 37                 | 18.0 | 22.74 | 19.7 | 20.5 | 24.1 |
| 38                 | 18.5 | 23.24 | 20.2 | 21.0 | 24.6 |
| 39                 | 19.0 | 23.74 | 20.7 | 21.5 | 25.1 |
| 40                 | 19.5 | 24.24 | 21.2 | 22.0 | 25.6 |
| 41                 | 20.0 | 24.74 | 21.7 | 22.5 | 26.1 |
| 42                 | 20.5 | 25.24 | 22.2 | 23.0 | 26.6 |
| 43                 | 21.0 | 25.74 | 22.7 | 23.5 | 27.1 |
| 44                 | 21.5 | 26.24 | 23.2 | 24.0 | 27.6 |
| 45                 | 22.0 | 26.74 | 23.7 | 24.5 | 28.1 |
| 46                 | 22.5 | 27.24 | 24.2 | 25.0 | 28.6 |
| 47                 | 23.0 | 27.74 | 24.7 | 25.5 | 29.1 |
| 48                 | 23.5 | 28.24 | 25.2 | 26.0 | 29.6 |
| 49                 | 24.0 | 28.74 | 25.7 | 26.5 | 30.1 |
| 50                 | 24.5 | 29.24 | 26.2 | 27.0 | 30.6 |
| 51                 | 25.0 | 29.74 | 26.7 | 27.5 | 31.1 |
| 52                 | 25.5 | 30.24 | 27.2 | 28.0 | 31.6 |
| 53                 | 26.0 | 30.74 | 27.7 | 28.5 | 32.1 |
| 54                 | 26.5 | 31.24 | 28.2 | 29.0 | 32.6 |
| 55                 | 27.0 | 31.74 | 28.7 | 29.5 | 33.1 |
| 56                 | 27.5 | 32.24 | 29.2 | 30.0 | 33.6 |
| 57                 | 28.0 | 32.74 | 29.7 | 30.5 | 34.1 |
| 58                 | 28.5 | 33.24 | 30.2 | 31.0 | 34.6 |
| 59                 | 29.0 | 33.74 | 30.7 | 31.5 | 35.1 |
| 60                 | 29.5 | 34.24 | 31.2 | 32.0 | 35.6 |

※この表は1, 2ページ目にのみ適用  
※THIS CHART IS APPLICABLE TO  
SHEET-1 AND SHEET-2 ONLY.



ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

|                                |                       |                     |                      |                                        |          |                                                                             |            |                    |          |
|--------------------------------|-----------------------|---------------------|----------------------|----------------------------------------|----------|-----------------------------------------------------------------------------|------------|--------------------|----------|
| TOLERANCE / 一般公差 (S)           |                       | PRODUCT SPEC / 製品規格 |                      | B                                      | DCN18025 | 2018/01/11                                                                  |            |                    |          |
| X <10 ±0.2                     |                       | UNIT<br>mm          |                      | ANGLE<br>3RD                           | A        | DCN-101                                                                     | 2011/02/02 | Y. MANBA           | T. SATOH |
| 10≤ X <30 ±0.25                |                       |                     |                      |                                        | O        | EDN-336                                                                     | 2008/05/15 | A. TSUNEMURA       | T. SATOH |
| 30≤ X ±0.3                     |                       |                     |                      | NO.                                    | EDN/DCN  | DATE                                                                        | ISSUE      | CHECKED            | APPROVED |
| ANGLE / 角度<br>±3°              |                       | SCALE<br>10 : 1     |                      | DATE<br>2008/05/15                     |          | PART NAME / 品名<br>SERIES 6288 FPC ASSY RA SMT<br>0.5mm PITCH BOTTOM CONTACT |            |                    |          |
| DRAWN<br>G. SAGARA             | DESIGNED<br>G. SAGARA | CHECKED             | APPROVED<br>T. SATOH | PART NO. / 型番<br>04 6288 OXX 000 800 + |          |                                                                             |            |                    |          |
| KYOCERA<br>KYOCERA Corporation |                       |                     |                      | DWG NO. / 図番<br>BJS 6288005            |          |                                                                             |            | SHEET/REV<br>1/3 B |          |





KYOCERA Corporation




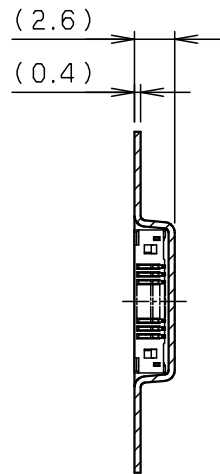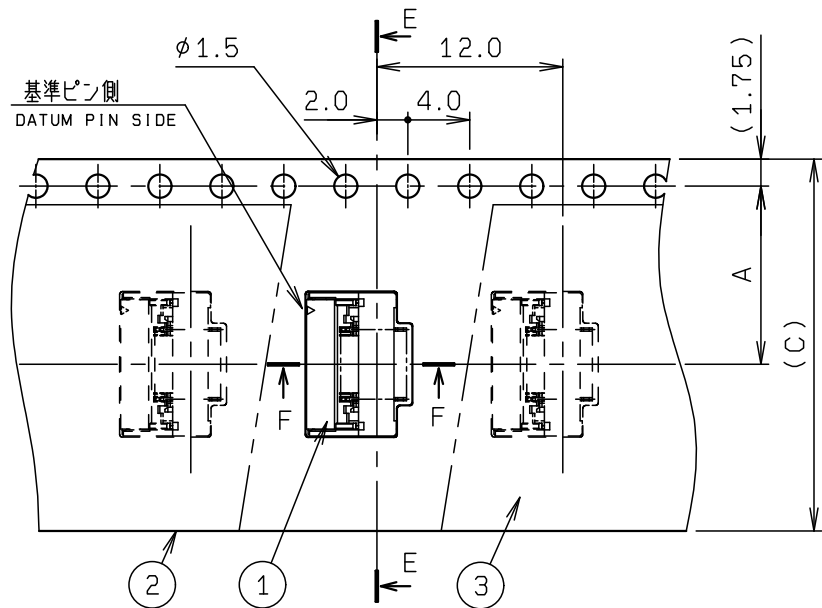


SECT. E-E  
(5~21P)

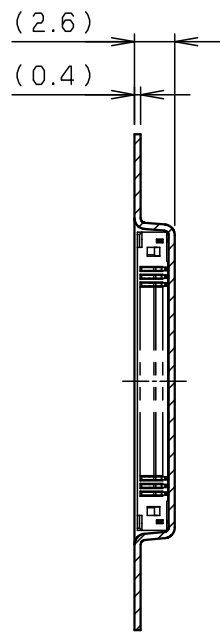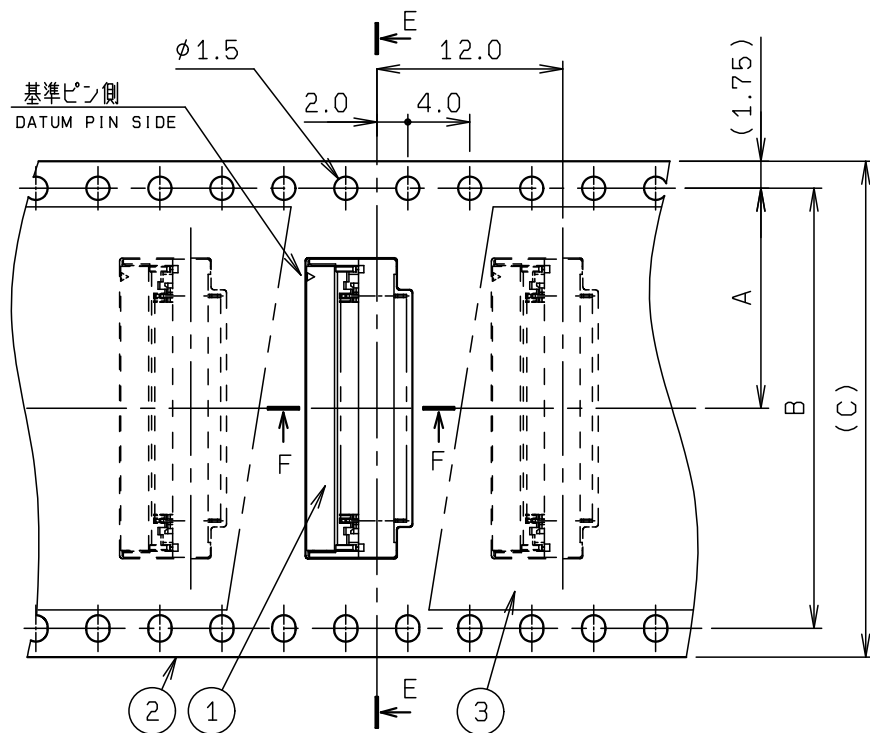


SECT. E-E  
(22~60P)

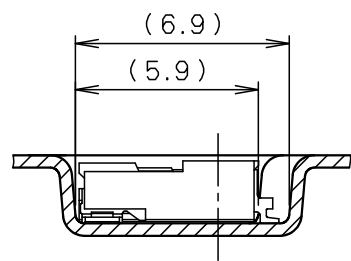

SECT. F-F (S=4:1)

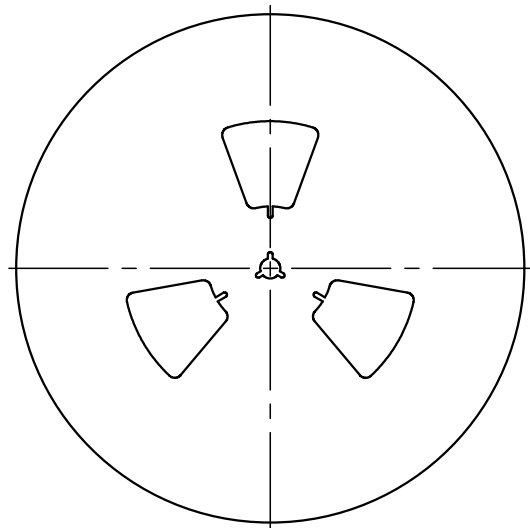


REEL DIMENSION

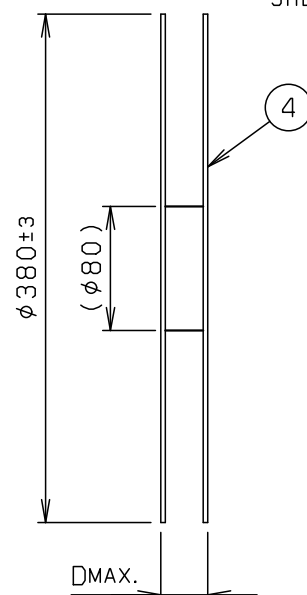


注記  
NOTE

- 梱包数量 : 2000 個/リール  
PACKING QUANTITY : 2000 ea/reel
- 納入時のリール巻き方向  
REELING DIRECTION  
IN DELIVERY

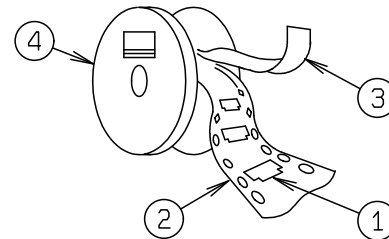

- 引出し方向  
USER DIRECTION OF FEED

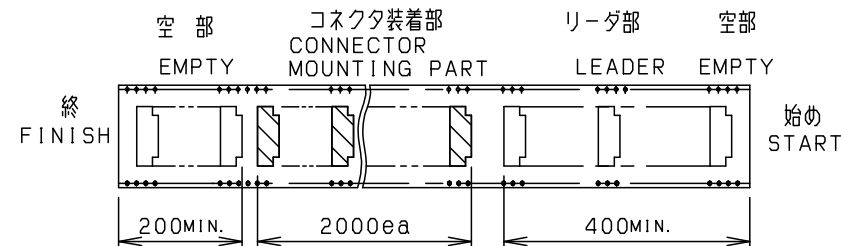

- 型番  
P/N 04 6288 0XX 000 800 +  
極数  
NO. OF POS.  
めっきコード  
PLATING CODE  
800 + : Sn-Cu

※この注記の1~3は3ページ目にのみ適用  
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

| NO. | DESCRIPTION    | PART NO.              | QTY  | MATERIAL    | DRW NO. | REMARKS               |
|-----|----------------|-----------------------|------|-------------|---------|-----------------------|
| 1   | CONNECTOR      | 04 6288 0XX 000 800 + | 2000 | ---         |         | 00 6288 0XX 000 846 + |
| 2   | EMBOSSSED TAPE |                       | 1    | POLYSTYRENE |         |                       |
| 3   | TOP COVER TAPE |                       | 1    | POLYSTYRENE |         |                       |
| 4   | REEL           |                       | 1    | POLYSTYRENE |         |                       |

| 極数<br>NO. OF POS. | A    | B   | C    | D    |
|-------------------|------|-----|------|------|
| 8                 | 7.5  | --- | 16.0 | 22.4 |
| 9                 | 7.5  | --- | 16.0 | 22.4 |
| 10                | 11.5 | --- | 24.0 | 30.4 |
| 11                | 11.5 | --- | 24.0 | 30.4 |
| 12                | 11.5 | --- | 24.0 | 30.4 |
| 13                | 11.5 | --- | 24.0 | 30.4 |
| 14                | 11.5 | --- | 24.0 | 30.4 |
| 15                | 11.5 | --- | 24.0 | 30.4 |
| 16                | 11.5 | --- | 24.0 | 30.4 |
| 17                | 11.5 | --- | 24.0 | 30.4 |
| 18                | 11.5 | --- | 24.0 | 30.4 |
| 19                | 11.5 | --- | 24.0 | 30.4 |
| 20                | 11.5 | --- | 24.0 | 30.4 |

| 極数<br>NO. OF POS. | A    | B    | C    | D    |
|-------------------|------|------|------|------|
| 21                | 11.5 | ---  | 24.0 | 30.4 |
| 22                | 14.2 | 28.4 | 32.0 | 38.4 |
| 23                | 14.2 | 28.4 | 32.0 | 38.4 |
| 24                | 14.2 | 28.4 | 32.0 | 38.4 |
| 25                | 14.2 | 28.4 | 32.0 | 38.4 |
| 26                | 14.2 | 28.4 | 32.0 | 38.4 |
| 27                | 14.2 | 28.4 | 32.0 | 38.4 |
| 28                | 14.2 | 28.4 | 32.0 | 38.4 |
| 29                | 14.2 | 28.4 | 32.0 | 38.4 |
| 30                | 14.2 | 28.4 | 32.0 | 38.4 |
| 31                | 14.2 | 28.4 | 32.0 | 38.4 |
| 32                | 14.2 | 28.4 | 32.0 | 38.4 |
| 33                | 14.2 | 28.4 | 32.0 | 38.4 |
| 34                | 20.2 | 40.4 | 44.0 | 50.4 |
| 35                | 20.2 | 40.4 | 44.0 | 50.4 |
| 36                | 20.2 | 40.4 | 44.0 | 50.4 |
| 37                | 20.2 | 40.4 | 44.0 | 50.4 |
| 38                | 20.2 | 40.4 | 44.0 | 50.4 |
| 39                | 20.2 | 40.4 | 44.0 | 50.4 |
| 40                | 20.2 | 40.4 | 44.0 | 50.4 |
| 41                | 20.2 | 40.4 | 44.0 | 50.4 |
| 42                | 20.2 | 40.4 | 44.0 | 50.4 |
| 43                | 20.2 | 40.4 | 44.0 | 50.4 |
| 44                | 20.2 | 40.4 | 44.0 | 50.4 |
| 45                | 20.2 | 40.4 | 44.0 | 50.4 |
| 46                | 20.2 | 40.4 | 44.0 | 50.4 |
| 47                | 20.2 | 40.4 | 44.0 | 50.4 |
| 48                | 20.2 | 40.4 | 44.0 | 50.4 |
| 49                | 20.2 | 40.4 | 44.0 | 50.4 |
| 50                | 26.2 | 52.4 | 56.0 | 62.4 |
| 51                | 26.2 | 52.4 | 56.0 | 62.4 |
| 52                | 26.2 | 52.4 | 56.0 | 62.4 |
| 53                | 26.2 | 52.4 | 56.0 | 62.4 |
| 54                | 26.2 | 52.4 | 56.0 | 62.4 |
| 55                | 26.2 | 52.4 | 56.0 | 62.4 |
| 56                | 26.2 | 52.4 | 56.0 | 62.4 |
| 57                | 26.2 | 52.4 | 56.0 | 62.4 |
| 58                | 26.2 | 52.4 | 56.0 | 62.4 |
| 59                | 26.2 | 52.4 | 56.0 | 62.4 |
| 60                | 26.2 | 52.4 | 56.0 | 62.4 |

ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

※この表は3ページ目にのみ適用  
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

|                                                 |  |                          |              |                             |         |
|-------------------------------------------------|--|--------------------------|--------------|-----------------------------|---------|
| TOLERANCE / 一般公差 (S)                            |  | PRODUCT SPEC / 製品規格      |              |                             |         |
| X < 10 ±0.2<br>10 ≤ X < 30 ±0.25<br>30 ≤ X ±0.3 |  | POLYSTYRENE (CLEAR)      |              |                             |         |
| ANGLE / 角度 ±3°                                  |  | UNIT<br>mm               | ANGLE<br>3RD | REFER TO SHEET 1/3          |         |
| SCALE<br>2 : 1                                  |  | DATE<br>2008/05/15       |              | NO.                         | EDN/DCN |
| DRAWN<br>A. TSUNEMURA                           |  | DESIGNED<br>A. TSUNEMURA |              | DATE                        |         |
| CHECKED                                         |  | APPROVED<br>T. SATOH     |              | ISSUE                       |         |
|                                                 |  |                          |              | CHECKED                     |         |
|                                                 |  |                          |              | APPROVED                    |         |
|                                                 |  |                          |              | PART NAME / 品名              |         |
|                                                 |  |                          |              | EMBOSS TAPE ASSY            |         |
|                                                 |  |                          |              | FPC ASSY RA SMT 0.5mm PITCH |         |
|                                                 |  |                          |              | PART NO. / 型番               |         |
|                                                 |  |                          |              | 04 6288 0XX 000 800 +       |         |
|                                                 |  |                          |              | DWG NO. / 図番                |         |
|                                                 |  |                          |              | BJS 6288005                 |         |
|                                                 |  |                          |              | SHEET REV                   |         |
|                                                 |  |                          |              | 13/3 B                      |         |



KYOCERA Corporation

DWG NO. / 図番  
BJS 6288005

SHEET REV  
13/3 B