



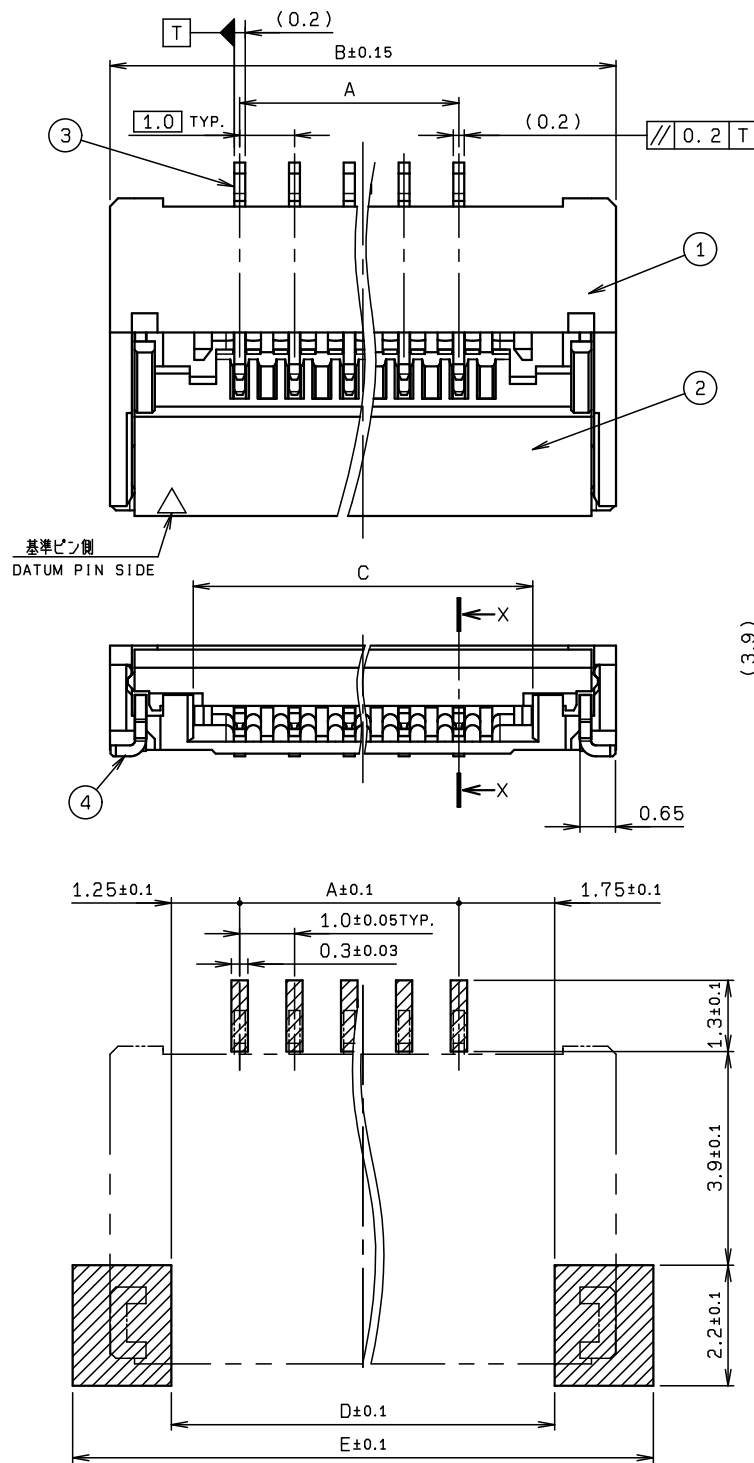


ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

| NO. | DESCRIPTION  | PART NO. | QTY | MATERIAL                | DRW NO. | REMARKS                 |
|-----|--------------|----------|-----|-------------------------|---------|-------------------------|
| 1   | INSULATOR    |          | 1   | HEAT RESISTANCE PLASTIC |         | COLOR: IVORY<br>UL94V-0 |
| 2   | ACTUATOR     |          | 1   | HEAT RESISTANCE PLASTIC |         | COLOR: BLACK<br>UL94V-0 |
| 3   | CONTACT      |          | N   | PHOS-BRONZE             |         | t=0.2                   |
| 4   | ANCHOR PLATE |          | 2   | PHOS-BRONZE             |         | t=0.2                   |

| 極数<br>NO. OF POS. | A    | B    | C    | D    | E    |
|-------------------|------|------|------|------|------|
| 10                | 9.0  | 14.2 | 11.2 | 12.0 | 15.6 |
| 12                | 11.0 | 16.2 | 13.2 | 14.0 | 17.6 |
| 13                | 12.0 | 17.2 | 14.2 | 15.0 | 18.6 |
| 15                | 14.0 | 19.2 | 16.2 | 17.0 | 20.6 |
| 20                | 19.0 | 24.2 | 21.2 | 22.0 | 25.6 |

※この表は1. 2ページ目区のみ適用  
※THIS CHART IS APPLICABLE TO  
SHEET-1 AND SHEET-2 ONLY.

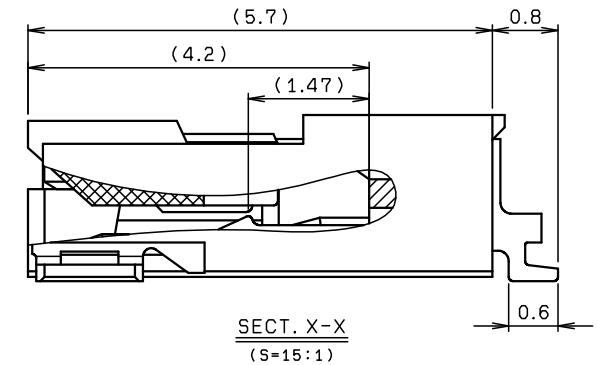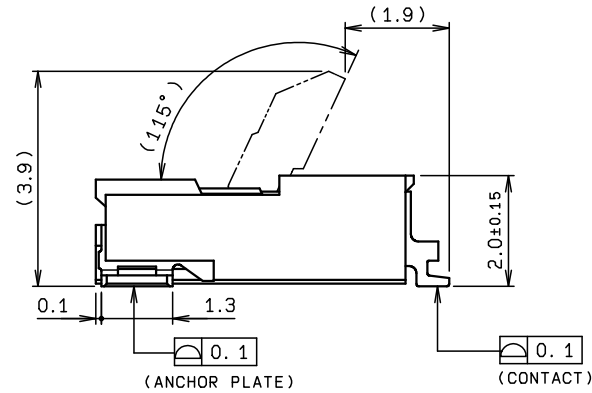

注 記  
NOTE


1. コンタクトテール及び固定金具は基板より  
最大浮き0.1とする。  
CONTACT TAIL AND ANCHOR PLATE  
HEIGHT SHALL BE 0.1MAX.

※この注記は1ページ目区のみ適用  
※THIS NOTES IS APPLICABLE TO  
SHEET-1 ONLY.

| TOLERANCE / 一般公差(S) |  | PRODUCT SPEC / 製品規格 |  | F                           | DCN20538 | 2020/05/27 | S. MORITA | Y. MANBA    | Y. FUJII |
|---------------------|--|---------------------|--|-----------------------------|----------|------------|-----------|-------------|----------|
| X < 10 ±0.2         |  | UNIT                |  | E                           | DCN18A05 | 2018/12/04 | R. MANABE | N. KITAGAWA | Y. FUJII |
| 10 ≤ X < 30 ±0.25   |  | mm                  |  | O                           | EDN-765  | 2013/12/20 | M. SEKI   |             | Y. FUJII |
| 30 ≤ X ±0.3         |  | 3RD                 |  | NO.                         | EDN/DCN  | DATE       | ISSUE     | CHECKED     | APPROVED |
| ANGLE / 角度 ±3°      |  | SCALE               |  | PART NAME / 品名              |          |            |           |             |          |
|                     |  | 10:1                |  | SERIES 6288 FPC ASSY RA SMT |          |            |           |             |          |
| DRAWN               |  | DESIGNED            |  | 1.0mm PITCH BOTTOM CONTACT  |          |            |           |             |          |
| M. TAKAHASHI        |  | M. SEKI             |  |                             |          |            |           |             |          |
|                     |  | CHECKED             |  | PART NO. / 製番               |          |            |           |             |          |
|                     |  | Y. FUJII            |  | 04 6288 0XX 900 846 +       |          |            |           |             |          |
|                     |  | APPROVED            |  | DWG NO. / 図番                |          |            |           |             |          |
|                     |  |                     |  | BJS 6288053                 |          |            |           |             |          |
|                     |  |                     |  | [SHEET]REV                  |          |            |           |             |          |
|                     |  |                     |  | 1/3 F                       |          |            |           |             |          |

KYOCERA

| NO. | DESCRIPTION | PART NO. | QTY | MATERIAL | DRW NO. | REMARKS |
|-----|-------------|----------|-----|----------|---------|---------|
|-----|-------------|----------|-----|----------|---------|---------|

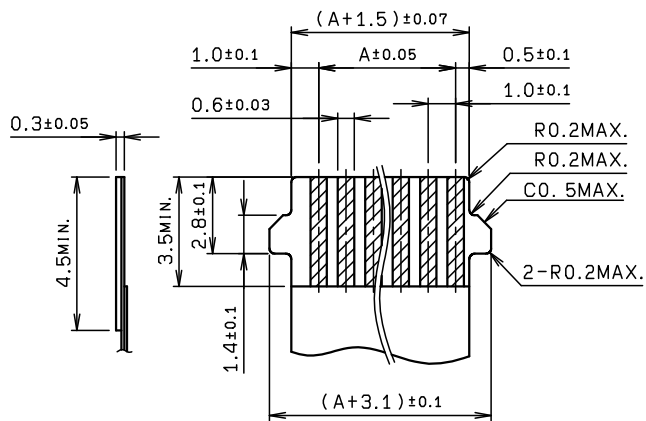

FPC構成  
FPC STRUCTURE  
(推奨仕様)

熱硬化性接着剤(厚さ:40μmMAX.)  
THERMOSETTING ADHESIVE  
(THICKNESS:40μmMAX.)

| 表面処理                | 仕様                                    |
|---------------------|---------------------------------------|
| AUめっき<br>AU PLATING | Ni UNDER COAT: 3±2μm<br>AU: 0.1μmMIN. |

カバーフィルム(材質:ポリイミド)  
COVER FILM  
(MATERIAL:POLYIMIDE)

導体(材質:圧延銅)  
CONDUCTOR  
(MATERIAL:ROLLED COPPER)


ベースフィルム(材質:ポリイミド)  
BASE FILM(MATERIAL:POLYIMIDE)

補強板(材質:ポリイミド)  
SUPPORTING TAPE  
(MATERIAL:POLYIMIDE)

ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

|                                                                                       |  |          |                     |          |            |                       |                                                           |          |      |           |         |          |
|---------------------------------------------------------------------------------------|--|----------|---------------------|----------|------------|-----------------------|-----------------------------------------------------------|----------|------|-----------|---------|----------|
| TOLERANCE / 一般公差(S)                                                                   |  |          | PRODUCT SPEC / 製品規格 |          |            |                       |                                                           |          |      |           |         |          |
| X <10 ±0.2<br>10 ≤ X <30 ±0.25<br>30 ≤ X ±0.3                                         |  |          | UNIT                |          | ANGLE      | REFER                 |                                                           | TO SHEET | 1/3  |           |         |          |
|                                                                                       |  |          | mm                  |          | 3RD        | NO.                   |                                                           | EDN/DCN  | DATE | ISSUE     | CHECKED | APPROVED |
|                                                                                       |  |          | SCALE               |          | DATE       |                       | PART NAME / 品名                                            |          |      |           |         |          |
| ANGLE / 角度                                                                            |  |          | NTS                 |          | 2013/12/20 |                       | SERIES 6288 FPC ASSY RA SMT<br>1.0mm PITCH BOTTOM CONTACT |          |      |           |         |          |
| DRAWN                                                                                 |  | DESIGNED | CHECKED             | APPROVED |            | PART NO. / 製番         |                                                           |          |      |           |         |          |
| M. TAKAHASHI                                                                          |  | M. SEKI  |                     | Y. FUJII |            | 04 6288 0XX 900 846 + |                                                           |          |      |           |         |          |
|  |  |          |                     |          |            | DWG NO. / 図番          |                                                           |          |      | SHEET/REV |         |          |
|                                                                                       |  |          |                     |          |            | BJS 6288053           |                                                           |          |      | 2/3 F     |         |          |



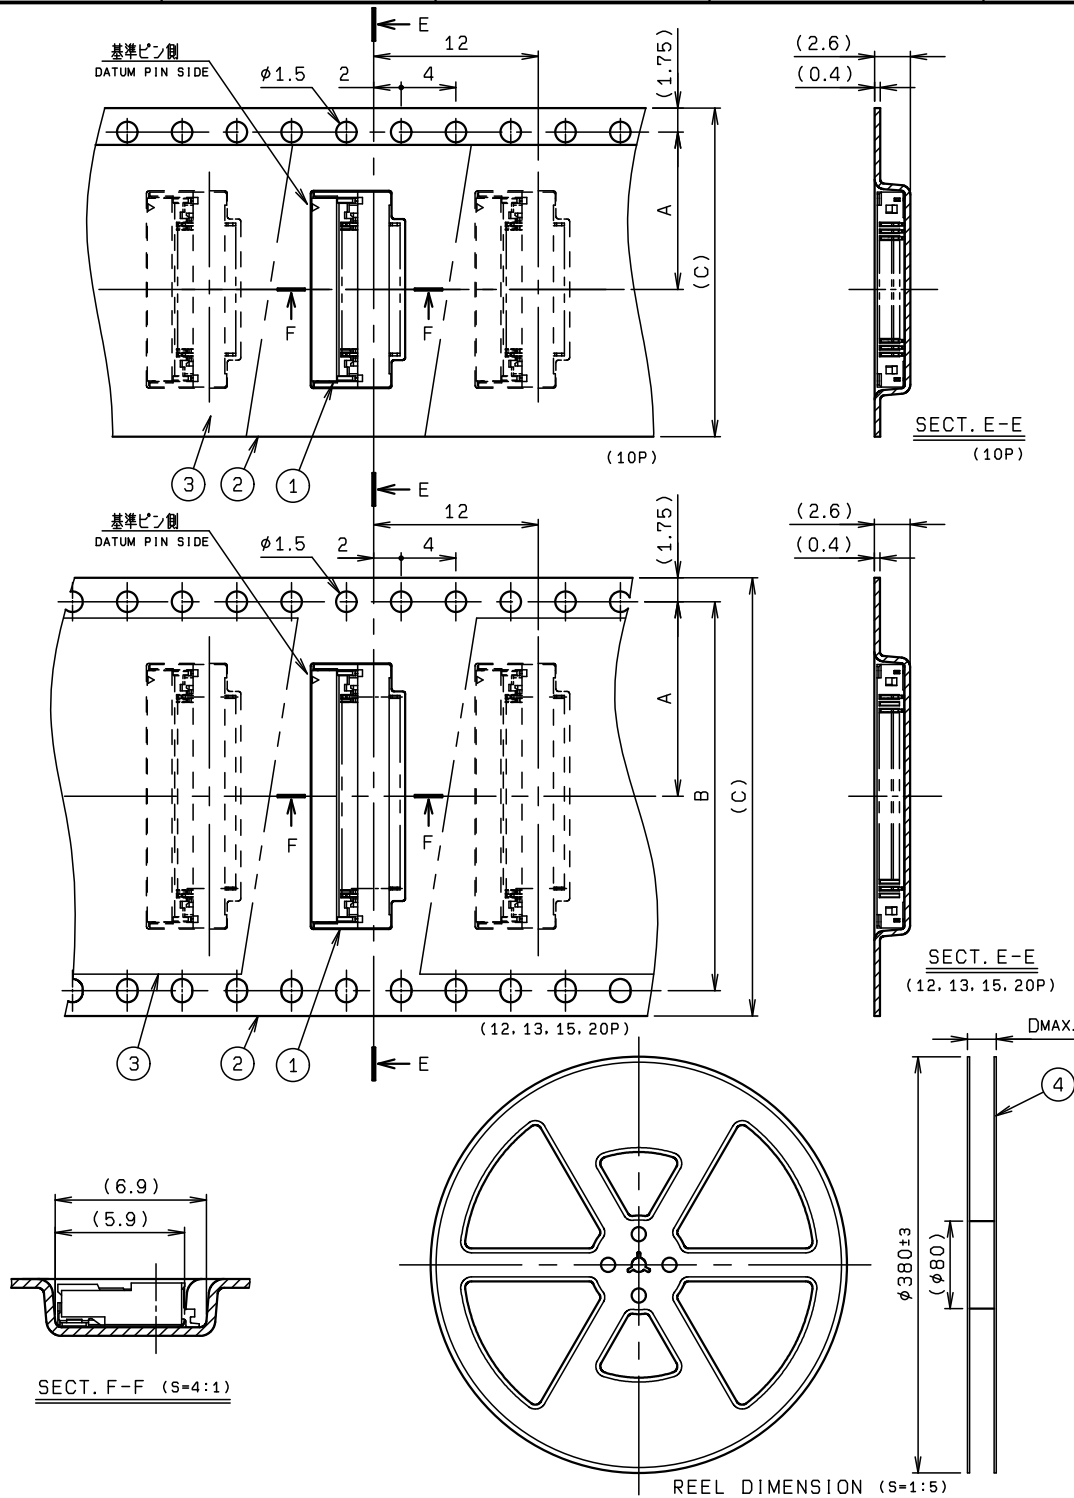


| NO. | DESCRIPTION    | PART NO.              | QTY  | MATERIAL    | DRW NO. | REMARKS               |
|-----|----------------|-----------------------|------|-------------|---------|-----------------------|
| 1   | CONNECTOR      | 04 6288 0XX 900 846 + | 2000 | —           |         | 00 6288 0XX 900 846 + |
| 2   | EMBOSSED TAPE  |                       | 1    | POLYSTYRENE |         |                       |
| 3   | TOP COVER TAPE |                       | 1    | POLYSTYRENE |         |                       |
| 4   | REEL           |                       | 1    | POLYSTYRENE |         |                       |

注 記  
NOTE

- 梱包数量 : 2000 個/リール  
PACKING QUANTITY : 2000 ea/reel
- 納入時のリール巻き方向  
REELING DIRECTION  
IN DELIVERY


| 極 数<br>NO. OF POS. | A    | B    | C    | D    |
|--------------------|------|------|------|------|
| 10                 | 11.5 | —    | 24.0 | 30.4 |
| 12                 | 14.2 | 28.4 | 32.0 | 38.4 |
| 13                 | 14.2 | 28.4 | 32.0 | 38.4 |
| 15                 | 14.2 | 28.4 | 32.0 | 38.4 |
| 20                 | 20.2 | 40.4 | 44.0 | 50.4 |

※この表は3ページ目のみ適用  
※THIS CHART IS APPLICABLE TO  
SHEET-3 ONLY.



3. 引出し方向

USER DIRECTION OF FEED

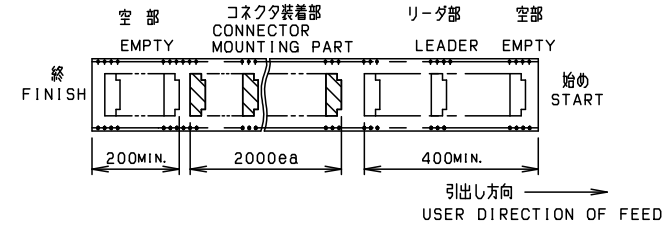

- 型 番  
P/N 04 6288 0XX 900 846 +  
極 数  
NO. OF POS. —  
めっきコード  
PLATING CODE —  
846+: Au(SELECTIVE)  
(ANCHOR PLATE: Sn-Cu)

※この注記の1~3は3ページ目のみ適用  
※THIS NOTES 1 TO 3 ARE APPLICABLE TO  
SHEET-3 ONLY.

ROHS規制対応  
COMPLIANT WITH  
ROHS REGULATIONS

| TOLERANCE / 一般公差(S) |  | PRODUCT SPEC / 製品規格 |  |         |  |                   |  |                             |  |
|---------------------|--|---------------------|--|---------|--|-------------------|--|-----------------------------|--|
| X < 10 ±0.2         |  | POLYSTYRENE(CLEAR)  |  |         |  |                   |  |                             |  |
| 10 ≤ X < 30 ±0.25   |  | UNIT                |  | ANGLE   |  | REFER TO SHEET    |  | 1/3                         |  |
| 30 ≤ X ±0.3         |  | mm                  |  | 3RD     |  | NO.               |  | EDN/DCN                     |  |
| ANGLE / 角度 ±3°      |  | SCALE               |  | DATE    |  | DATE              |  | ISSUE                       |  |
| DRAWN M. TAKAHASHI  |  | DESIGNED M. SEKI    |  | CHECKED |  | APPROVED Y. FUJII |  | PART NAME / 品名              |  |
|                     |  |                     |  |         |  |                   |  | EMBOSS TAPE ASSY            |  |
|                     |  |                     |  |         |  |                   |  | FPC ASSY RA SMT 1.0mm PITCH |  |
|                     |  |                     |  |         |  |                   |  | PART NO. / 型番               |  |
|                     |  |                     |  |         |  |                   |  | 04 6288 0XX 900 846 +       |  |
|                     |  |                     |  |         |  |                   |  | DWG NO. / 図番                |  |
|                     |  |                     |  |         |  |                   |  | BJS 6288053                 |  |
|                     |  |                     |  |         |  |                   |  | SHEET/REV                   |  |
|                     |  |                     |  |         |  |                   |  | 3/3 F                       |  |