


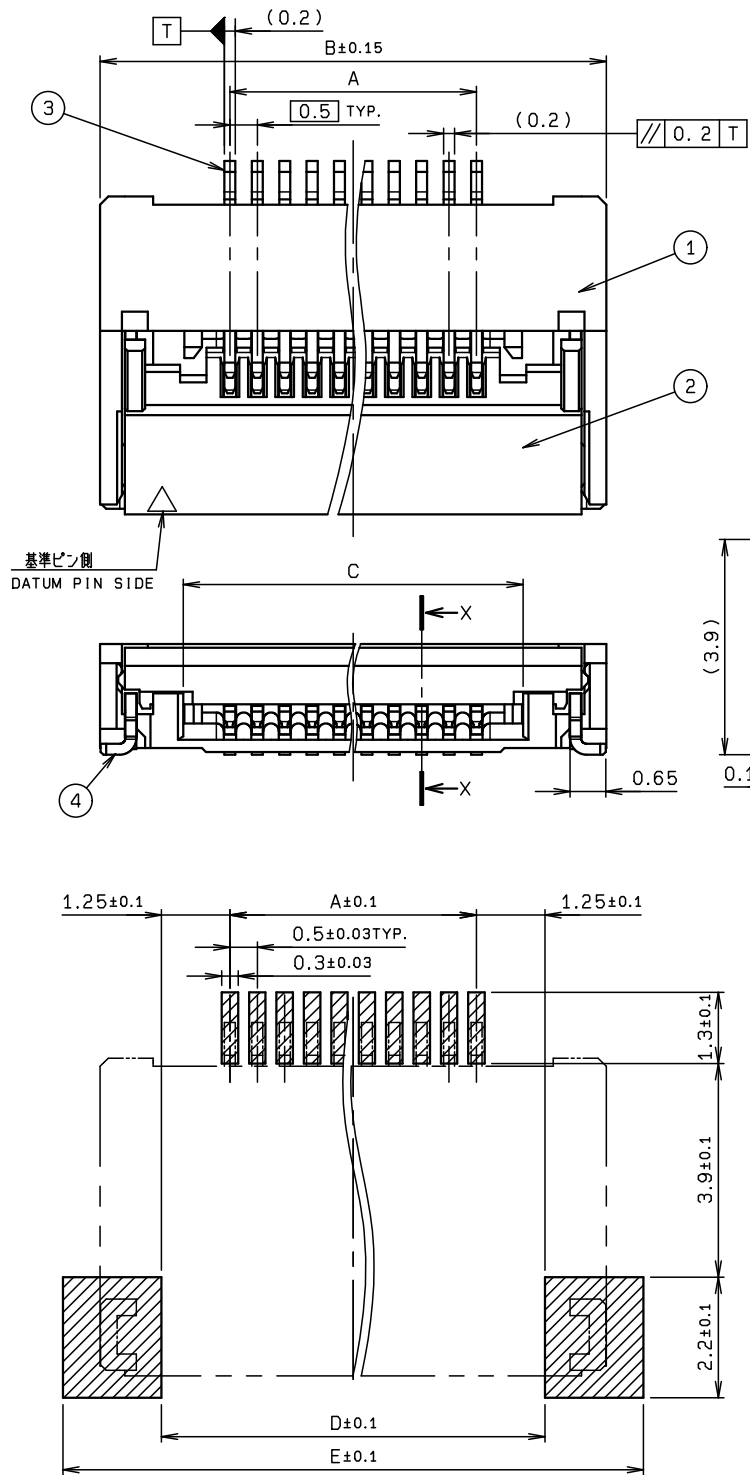


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: IVORY UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0. 2
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0. 2






極數 NO. OF POS.	A	B	C	D	E
8	3.5	8.2	5.2	6.0	9.6
9	4.0	8.7	5.7	6.5	10.2
10	4.5	9.2	6.2	7.0	10.8
11	5.0	9.7	6.7	7.5	11.4
12	5.5	10.2	7.2	8.0	11.9
13	6.0	10.7	7.7	8.5	12.5
14	6.5	11.2	8.2	9.0	12.9
15	7.0	11.7	8.7	9.5	13.5
16	7.5	12.2	9.2	10.0	13.9
17	8.0	12.7	9.7	10.5	14.5
18	8.5	13.2	10.2	11.0	14.9
19	9.0	13.7	10.7	11.5	15.5
20	9.5	14.2	11.2	12.0	15.9
21	10.0	14.7	11.7	12.5	16.5
22	10.5	15.2	12.2	13.0	16.9
23	11.0	15.7	12.7	13.5	17.5
24	11.5	16.2	13.2	14.0	17.9
25	12.0	16.7	13.7	14.5	18.5
26	12.5	17.2	14.2	15.0	18.9
27	13.0	17.7	14.7	15.5	19.5
28	13.5	18.2	15.2	16.0	19.9
29	14.0	18.7	15.7	16.5	20.5
30	14.5	19.2	16.2	17.0	20.9

極數 NO. OF POS.	A	B	C	D	E
31	15. 0	19. 7	16. 7	17. 5	21. 1
32	15. 5	20. 2	17. 2	18. 0	21. 6
33	16. 0	20. 7	17. 7	18. 5	22. 1
34	16. 5	21. 2	18. 2	19. 0	22. 6
35	17. 0	21. 7	18. 7	19. 5	23. 1
36	17. 5	22. 2	19. 2	20. 0	23. 6
37	18. 0	22. 7	19. 7	20. 5	24. 1
38	18. 5	23. 2	20. 2	21. 0	24. 6
39	19. 0	23. 7	20. 7	21. 5	25. 1
40	19. 5	24. 2	21. 2	22. 0	25. 6
41	20. 0	24. 7	21. 7	22. 5	26. 1
42	20. 5	25. 2	22. 2	23. 0	26. 6
43	21. 0	25. 7	22. 7	23. 5	27. 1
44	21. 5	26. 2	23. 2	24. 0	27. 6
45	22. 0	26. 7	23. 7	24. 5	28. 1
46	22. 5	27. 2	24. 2	25. 0	28. 6
47	23. 0	27. 7	24. 7	25. 5	29. 1
48	23. 5	28. 2	25. 2	26. 0	29. 6
49	24. 0	28. 7	25. 7	26. 5	30. 1
50	24. 5	29. 2	26. 2	27. 0	30. 6
51	25. 0	29. 7	26. 7	27. 5	31. 1
52	25. 5	30. 2	27. 2	28. 0	31. 6
53	26. 0	30. 7	27. 7	28. 5	32. 1
54	26. 5	31. 2	28. 2	29. 0	32. 6
55	27. 0	31. 7	28. 7	29. 5	33. 1
56	27. 5	32. 2	29. 2	30. 0	33. 6
57	28. 0	32. 7	29. 7	30. 5	34. 1
58	28. 5	33. 2	30. 2	31. 0	34. 6
59	29. 0	33. 7	30. 7	31. 5	35. 1
60	29. 5	34. 2	31. 2	32. 0	35. 6


※この表は1, 2ページ目区のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

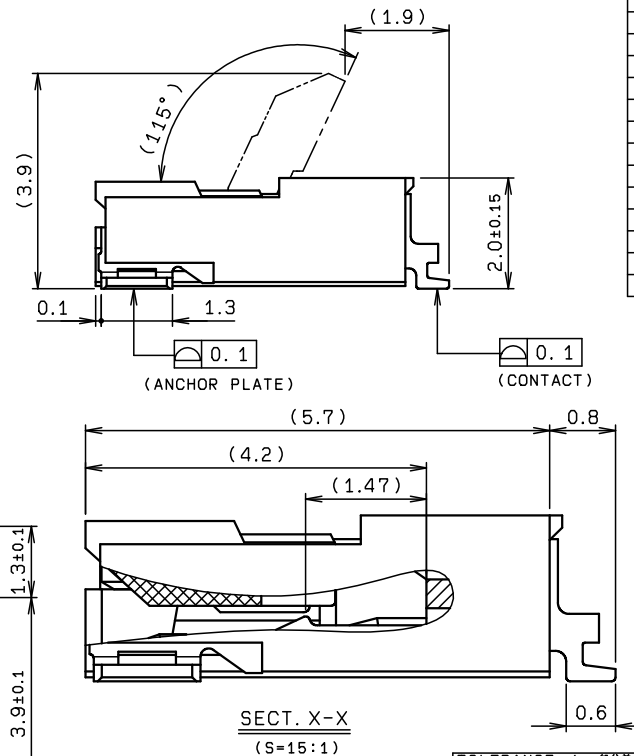


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		B DCN20312		2020/08/27		Y. MANABA		Y. FUJII	
10 ≤ X < 10 ± 0.2		UNIT mm		A DCN18A05		2018/12/04		R. MANABA		N. KITAGAWA Y. FUJII	
30 ≤ X < 30 ± 0.25				O EDN-291		2015/06/22		R. MANABA		Y. FUJII	
30 ≤ X ± 0.3		ANGLE 3RD		NO. EDN/DCN		DATE		ISSUE		CHECKED APPROVED	
ANGLE / 角度 ± 3°		SCALE 10 : 1		DATE 2015/06/22		PART NAME / 品名 SERIES 6288 FPC ASSY RA SMT 0.5mm PITCH BOTTOM CONTACT					
DRAWN M. TAKAHASHI		DESIGNED R. MANABA		CHECKED		APPROVED Y. FUJII		PART NO. / 型番 04 6288 0XX 000 860 +			
				DWG NO. / 図番 BJS 6288060				SHEET/REV 1/3 B			

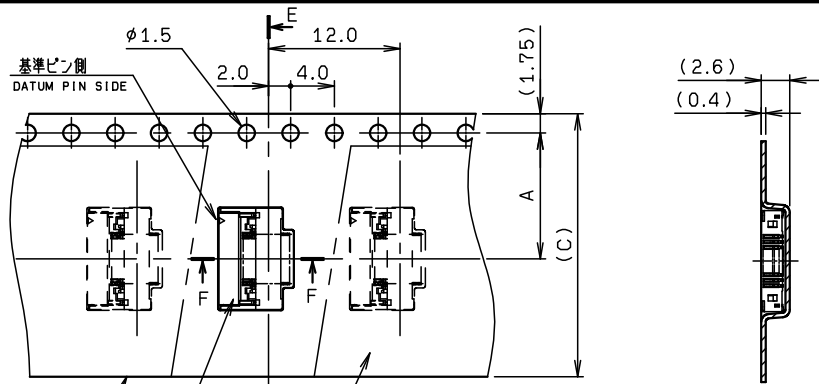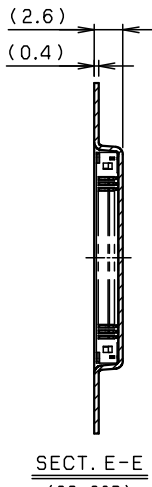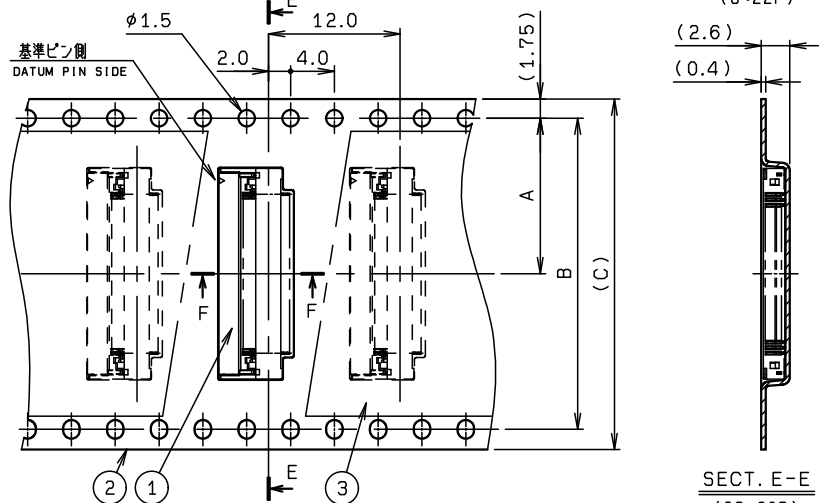SECT. E-E
(8~22P)SECT. E-E
(23~60P)

SECT. F-F (S=4:1)

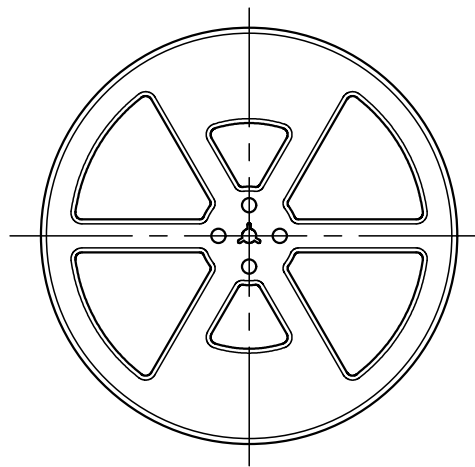


REEL DIMENSION (S=1:5)

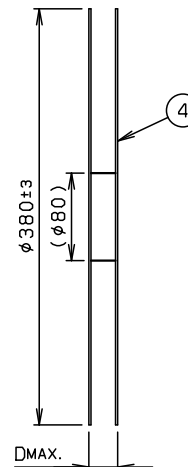


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6288 0XX 000 860 +	2000	---		00 6288 0XX 000 860 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



- 引出し方向
USER DIRECTION OF FEED

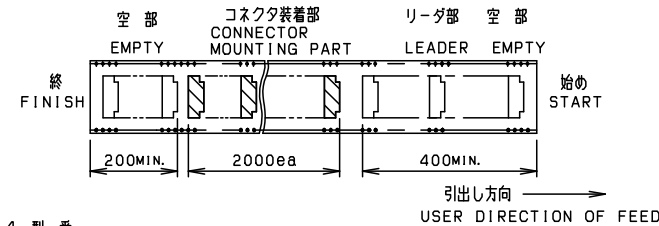

- 型番
P/N 04 6288 0XX 000 860 +

極数
NO. OF POS.
めっきコード
PLATING CODE
860 + : AU 0.76 μ m MIN.

※この注記の1~3は3ページ目にお適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極数 NO. OF POS.	A	B	C	D
8	7.5	---	16.0	22.4
9	7.5	---	16.0	22.4
10	11.5	---	24.0	30.4
11	11.5	---	24.0	30.4
12	11.5	---	24.0	30.4
13	11.5	---	24.0	30.4
14	11.5	---	24.0	30.4
15	11.5	---	24.0	30.4
16	11.5	---	24.0	30.4
17	11.5	---	24.0	30.4
18	11.5	---	24.0	30.4
19	11.5	---	24.0	30.4
20	11.5	---	24.0	30.4

極数 NO. OF POS.	A	B	C	D
21	11.5	---	24.0	30.4
22	14.2	28.4	32.0	38.4
23	14.2	28.4	32.0	38.4
24	14.2	28.4	32.0	38.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
31	14.2	28.4	32.0	38.4
32	14.2	28.4	32.0	38.4
33	14.2	28.4	32.0	38.4
34	20.2	40.4	44.0	50.4
35	20.2	40.4	44.0	50.4
36	20.2	40.4	44.0	50.4
37	20.2	40.4	44.0	50.4
38	20.2	40.4	44.0	50.4
39	20.2	40.4	44.0	50.4
40	20.2	40.4	44.0	50.4
41	20.2	40.4	44.0	50.4
42	20.2	40.4	44.0	50.4
43	20.2	40.4	44.0	50.4
44	20.2	40.4	44.0	50.4
45	20.2	40.4	44.0	50.4
46	20.2	40.4	44.0	50.4
47	20.2	40.4	44.0	50.4
48	20.2	40.4	44.0	50.4
49	20.2	40.4	44.0	50.4
50	26.2	52.4	56.0	62.4
51	26.2	52.4	56.0	62.4
52	26.2	52.4	56.0	62.4
53	26.2	52.4	56.0	62.4
54	26.2	52.4	56.0	62.4
55	26.2	52.4	56.0	62.4
56	26.2	52.4	56.0	62.4
57	26.2	52.4	56.0	62.4
58	26.2	52.4	56.0	62.4
59	26.2	52.4	56.0	62.4
60	26.2	52.4	56.0	62.4

※この表は3ページ目にお適用

※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
		POLYSTYRENE (CLEAR)							
X < 10	± 0.2	UNIT mm	ANGLE 3RD	REFER TO SHEET		1/3			
10 ≤ X < 30	± 0.25			NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
30 ≤ X	± 0.3			PART NAME / 品名					
ANGLE / 角度		SCALE	DATE	EMBOSS TAPE ASSY					
± 3°		2 : 1	2015/06/22	FPC ASSY RA SMT 0.5mm PITCH					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
M. TAKAHASHI	R. MANABE		Y. FUJII	04 6288 0XX 000 860 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6288060				3/3 B	

KYOCERA