
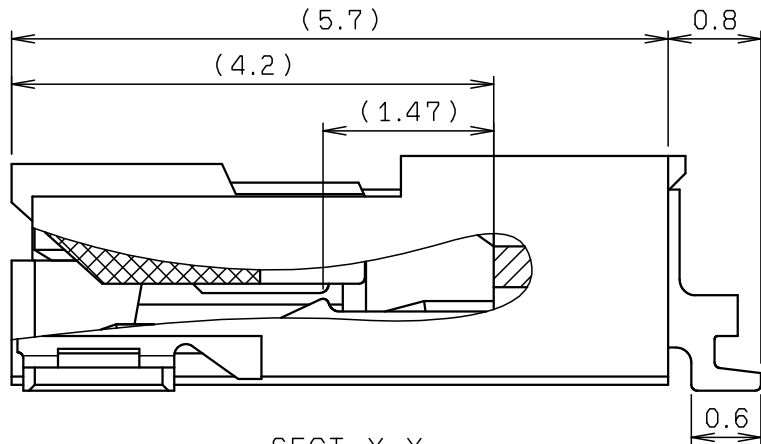
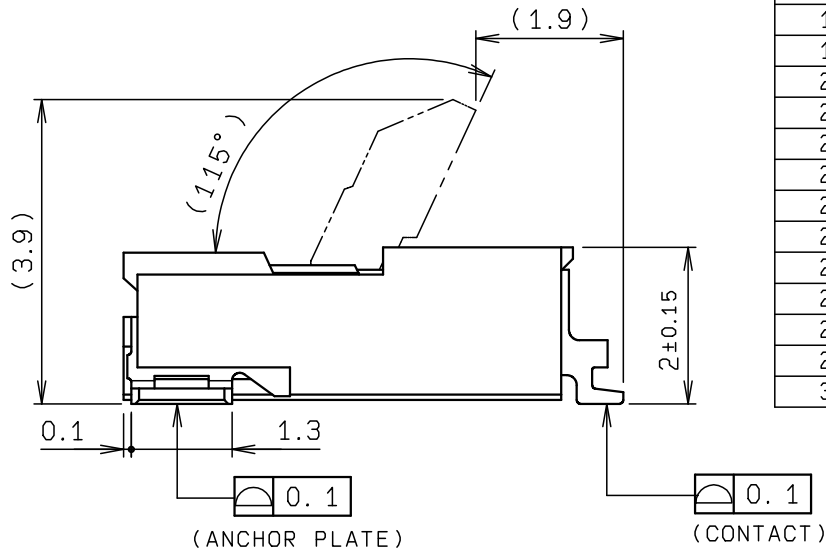
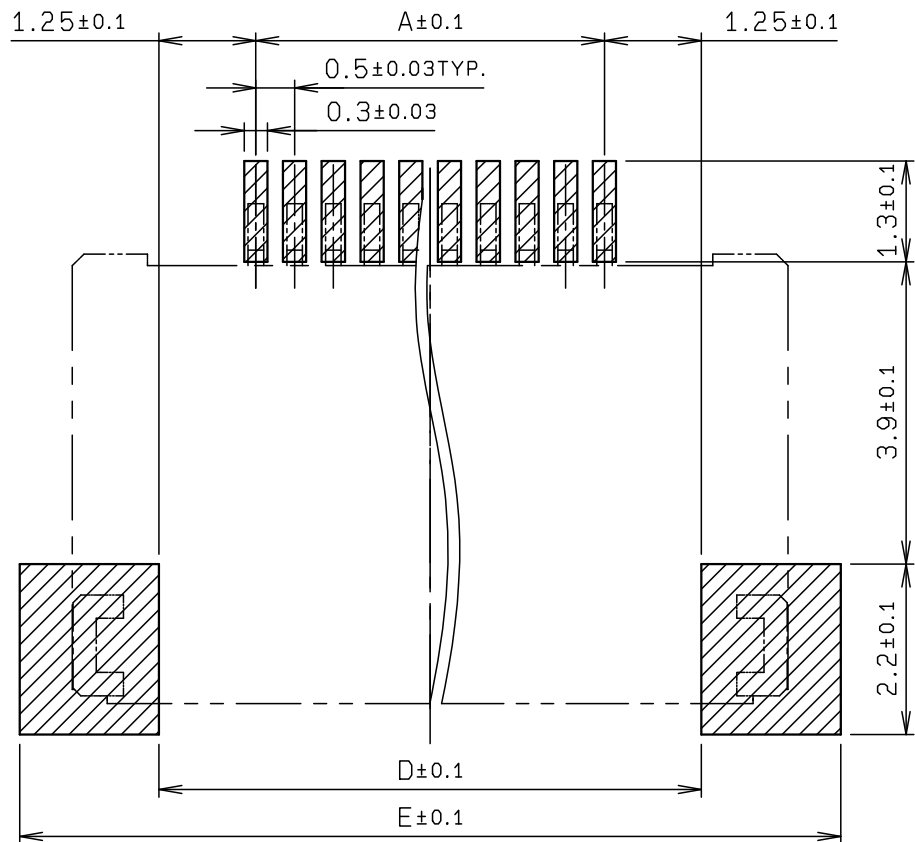
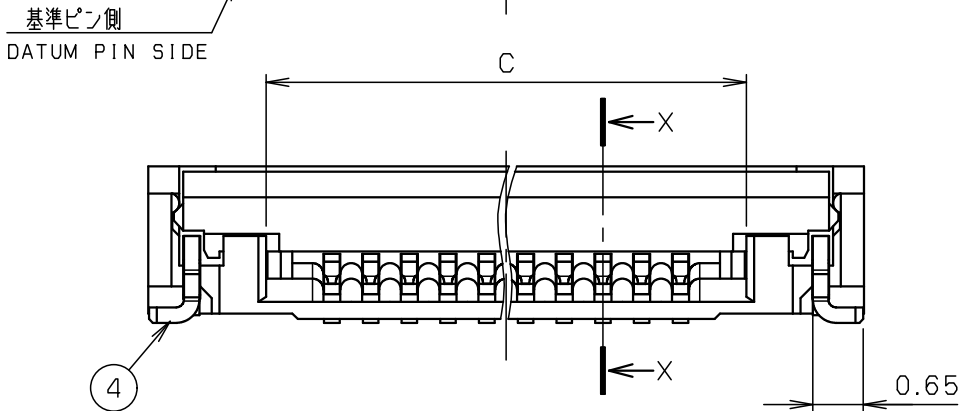


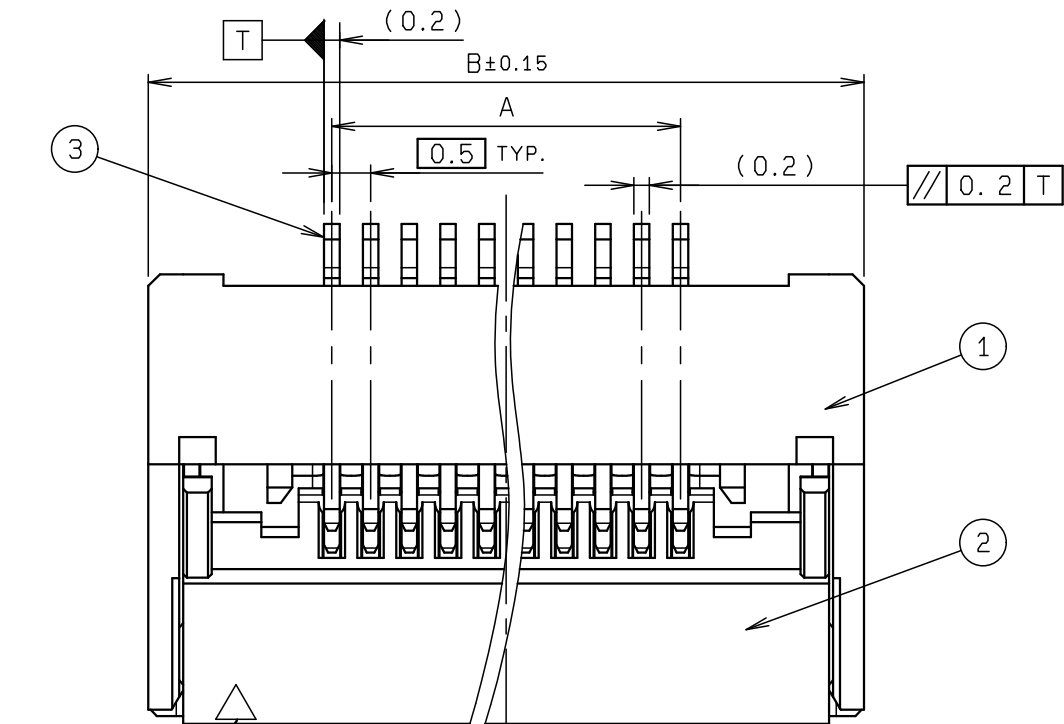

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR: IVORY UL94V-0
2	ACTUATOR		1	PA6T		COLOR: BLACK UL94V-0
3	CONTACT		N	COPPER ALLOY		t=0.2
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.2

極 数 NO. OF POS.	A	B	C	D	E
8	3.5	8.24	5.2	6.0	9.6
9	4.0	8.74	5.7	6.5	10.1
10	4.5	9.24	6.2	7.0	10.6
11	5.0	9.74	6.7	7.5	11.1
12	5.5	10.24	7.2	8.0	11.6
13	6.0	10.74	7.7	8.5	12.1
14	6.5	11.24	8.2	9.0	12.6
15	7.0	11.74	8.7	9.5	13.1
16	7.5	12.24	9.2	10.0	13.6
17	8.0	12.74	9.7	10.5	14.1
18	8.5	13.24	10.2	11.0	14.6
19	9.0	13.74	10.7	11.5	15.1
20	9.5	14.24	11.2	12.0	15.6
21	10.0	14.74	11.7	12.5	16.1
22	10.5	15.24	12.2	13.0	16.6
23	11.0	15.74	12.7	13.5	17.1
24	11.5	16.24	13.2	14.0	17.6
25	12.0	16.74	13.7	14.5	18.1
26	12.5	17.24	14.2	15.0	18.6
27	13.0	17.74	14.7	15.5	19.1
28	13.5	18.24	15.2	16.0	19.6
29	14.0	18.74	15.7	16.5	20.1
30	14.5	19.24	16.2	17.0	20.6

極 数 NO. OF POS.	A	B	C	D	E
31	15.0	19.74	16.7	17.5	21.1
32	15.5	20.24	17.2	18.0	21.6
33	16.0	20.74	17.7	18.5	22.1
34	16.5	21.24	18.2	19.0	22.6
35	17.0	21.74	18.7	19.5	23.1
36	17.5	22.24	19.2	20.0	23.6
37	18.0	22.74	19.7	20.5	24.1
38	18.5	23.24	20.2	21.0	24.6
39	19.0	23.74	20.7	21.5	25.1
40	19.5	24.24	21.2	22.0	25.6
41	20.0	24.74	21.7	22.5	26.1
42	20.5	25.24	22.2	23.0	26.6
43	21.0	25.74	22.7	23.5	27.1
44	21.5	26.24	23.2	24.0	27.6
45	22.0	26.74	23.7	24.5	28.1
46	22.5	27.24	24.2	25.0	28.6
47	23.0	27.74	24.7	25.5	29.1
48	23.5	28.24	25.2	26.0	29.6
49	24.0	28.74	25.7	26.5	30.1
50	24.5	29.24	26.2	27.0	30.6
51	25.0	29.74	26.7	27.5	31.1
52	25.5	30.24	27.2	28.0	31.6
53	26.0	30.74	27.7	28.5	32.1
54	26.5	31.24	28.2	29.0	32.6
55	27.0	31.74	28.7	29.5	33.1
56	27.5	32.24	29.2	30.0	33.6
57	28.0	32.74	29.7	30.5	34.1
58	28.5	33.24	30.2	31.0	34.6
59	29.0	33.74	30.7	31.5	35.1
60	29.5	34.24	31.2	32.0	35.6
64	31.5	36.24	33.2	34.0	37.6
68	33.5	38.24	35.2	36.0	39.6
70	34.5	39.24	36.2	37.0	40.6
80	39.5	44.24	41.2	42.0	45.6

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE					
10 ≤ X < 30 ±0.25		mm		3RD					
30 ≤ X ±0.3		SCALE		DATE					
ANGLE / 角度 ±3°		10:1		2019/04/02					
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
								04 6288 OXX 600 846 + T	
								DWG NO. / 図番	
								BJS 6288082	
								SHEET / REV	
								11/3 0	



© 2019 KYOCERA Corporation

注 記
NOTE

1. コンタクトテール及び固定金具は基板より
最大浮き0.1とする。
CONTACT TAIL AND ANCHOR PLATE
HEIGHT SHALL BE 0.1MAX.

② 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE
FPC/FFC FROM 1 OR 2.

※この注記は1, 2ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

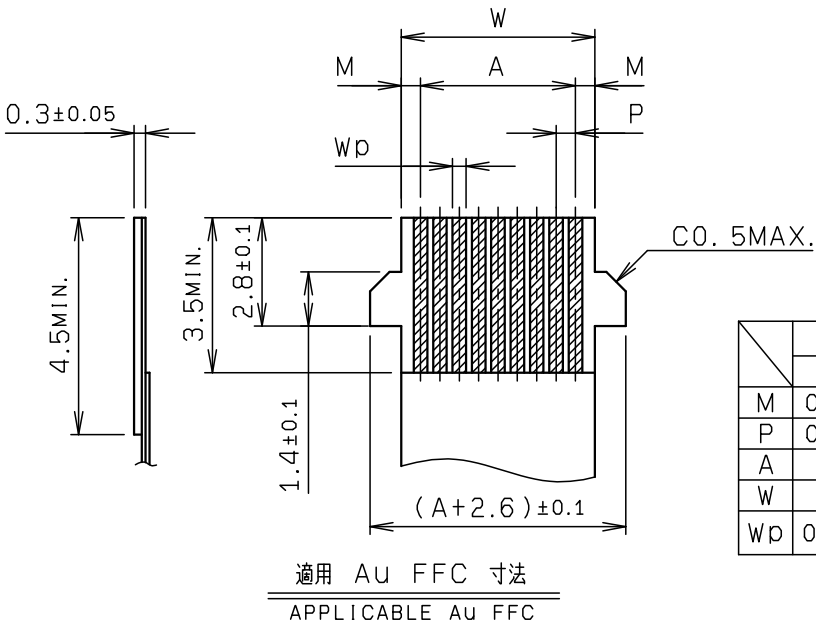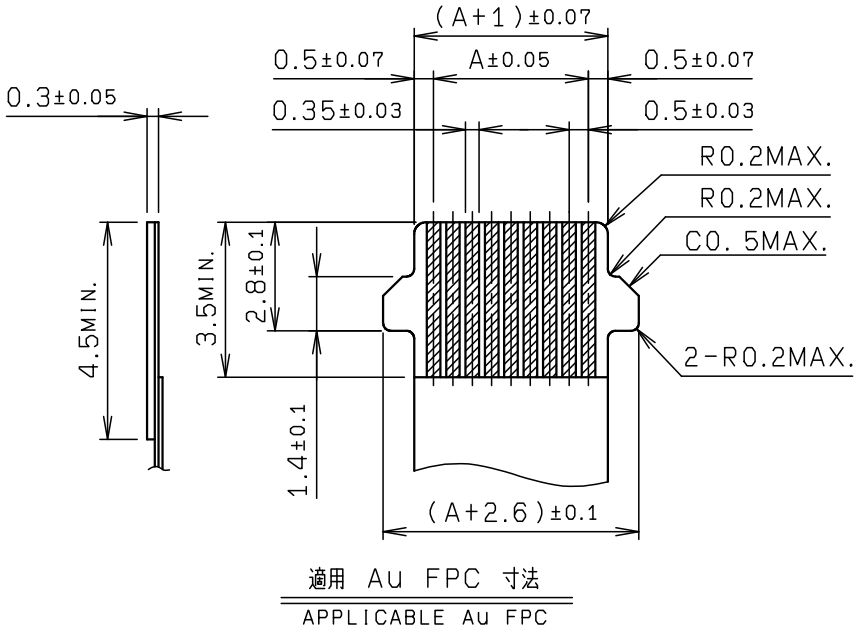


	FFC	
	1	2
M	0.5±0.08	0.5±0.07
P	0.5±0.05	0.5±0.03
A	A±0.05	A±0.05
W	W±0.07	W±0.07
Wp	0.32±0.03	0.30±0.03


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

FPC構成
FPC STRUCTURE
(推奨仕様)

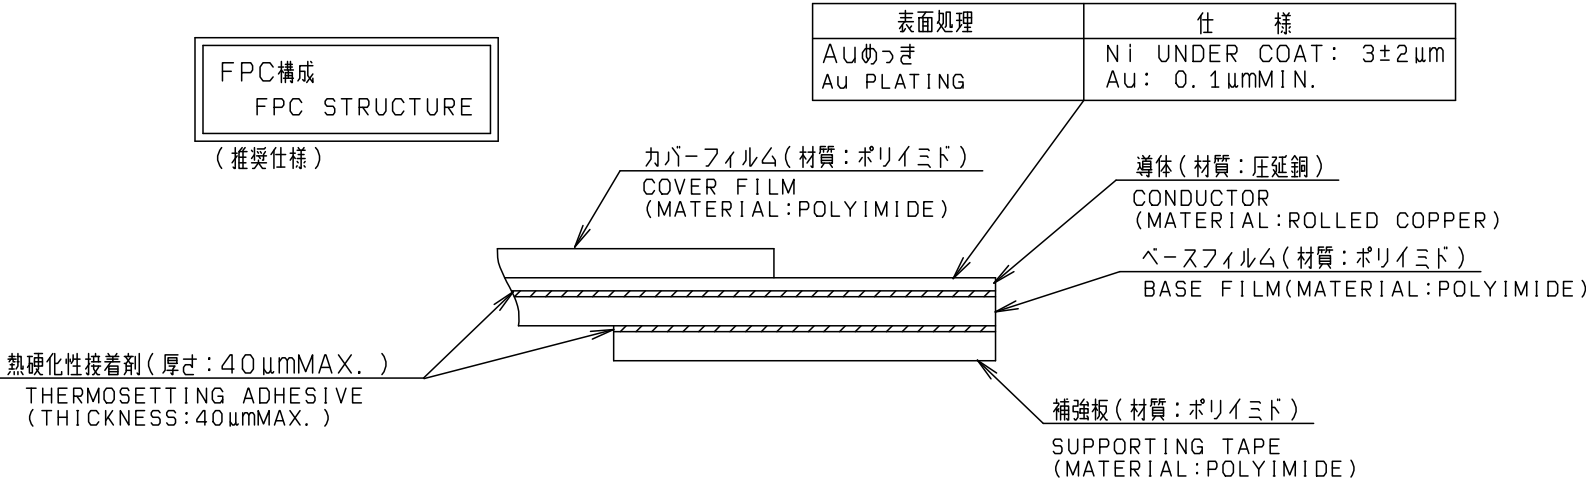

FFC構成
FFC STRUCTURE
(推奨仕様)

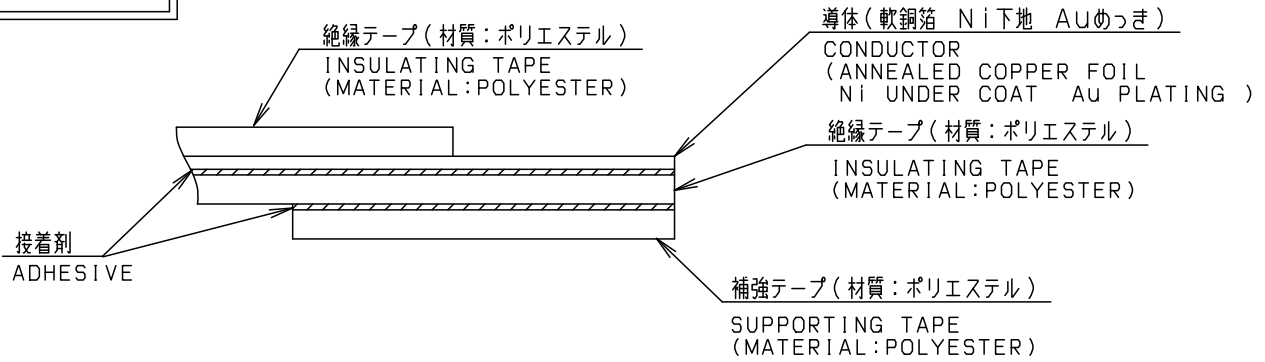

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3			
10 ≤ X < 30 ±0.25		SCALE NTS		DATE 2019/04/02		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		ANGLE / 角度 ±3°		PART NAME / 品名		CHECKED		APPROVED	
DRAWN M. TAKAHASHI		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
								SERIES 6288 FPC ASSY RA SMT	
								0.5mm PITCH BOTTOM CONTACT	
								PART NO. / 型番	
								04 6288 0XX 600 846 + T	
								DWG NO. / 図番	
								BJS 6288082	
								SHEET / REV	
								12/3 0	



