


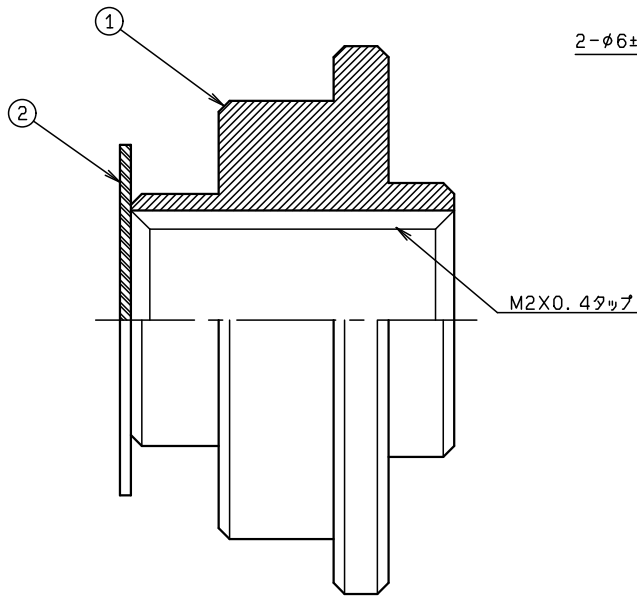


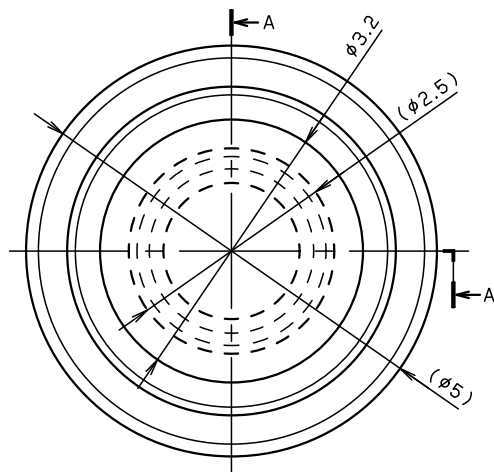

SECT. A-A (S=20:1)




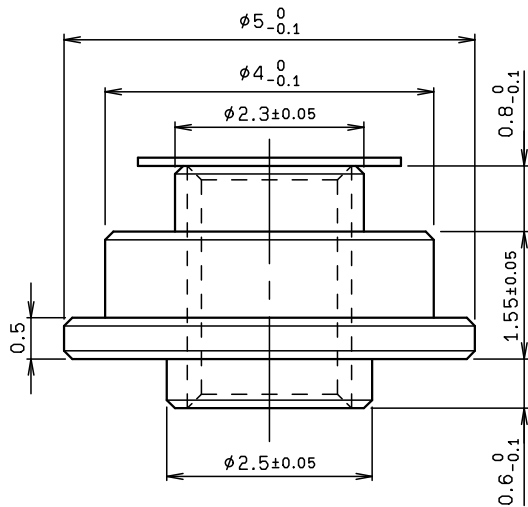


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	STUD		1	BS		
2	VACUUM TAPE		1	POLYIMIDE		

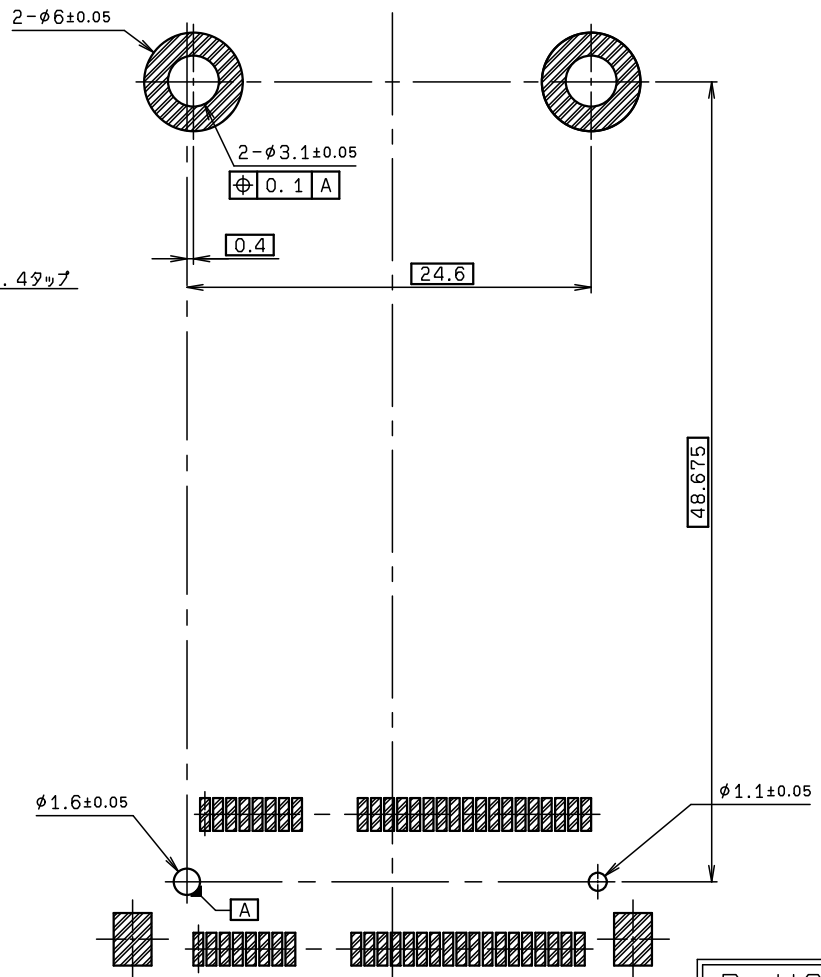

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		B	DCN20760	2020/08/05	H. TAMAI		M. YOSHIDA		
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		A	DCN-337	2006/03/30	H. KURIMOTO		T. MORI
						O	EDN-157	2006/02/07	T. MORI		N. HAYASHI
		ANGLE / 角度 ±3°		SCALE 15 : 1		DATE 2006/02/07		PART NAME / 品名 SERIES 6407 PARTS STUD SMT WITH VACUUM TAPE			
DRAWN T. MORI		DESIGNED T. MORI		CHECKED		APPROVED N. HAYASHI		PART NO. / 型番 84 6407 001 000 804 +			
						DWG NO. / 図番 BJS 6407004			SHEET/REV 1/2 B		

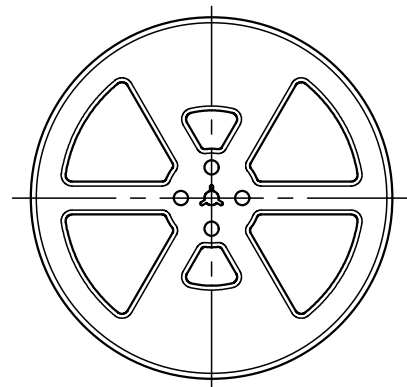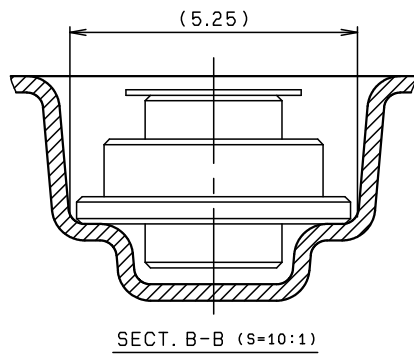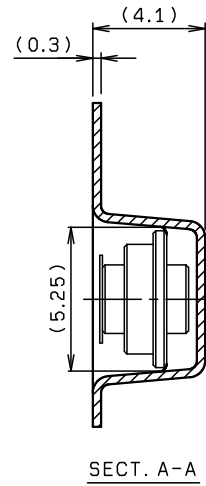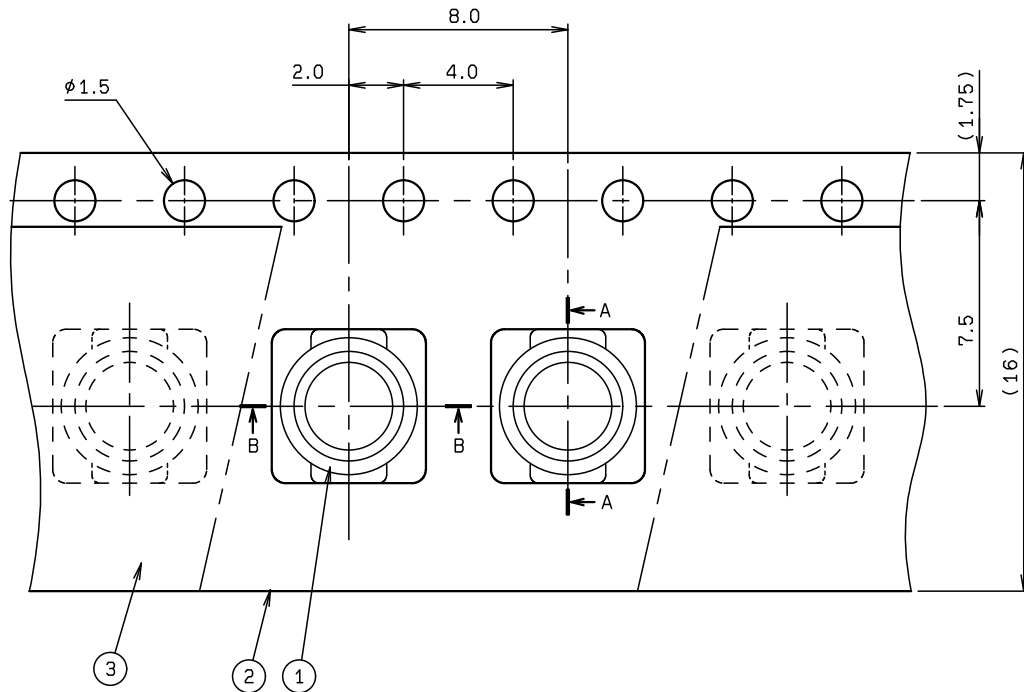

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	84 6407 001 000 804 +	2000			30 6407 001 000 804 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

- 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

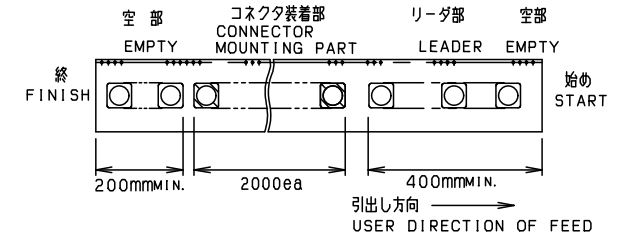4. 型番
P/N

84 6407 001 000 804 +

めっきコード

PLATING CODE

804 +:Ni UNDER COAT
NON-BRIGHT Sn

※この注記の1～3は2ページ目にも適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ± 0.2		UNIT		ANGLE		REFER TO SHEET		1/2	
10 $\leq$ X < 30 ± 0.25		mm		3RD		NO.		EDN/DCN	
30 $\leq$ X ± 0.3		SCALE		DATE		PART NAME / 品名		DATE	
ANGLE / 角度 $\pm 3^\circ$		5 : 1		2006/02/07		SERIES 6407 EMBOSS TAPE ASSY		ISSUE	
DRAWN T. MORI		DESIGNED T. MORI		CHECKED		APPROVED N. HAYASHI		PART NO. / 型番	
						84 6407 001 000 804 +		CHECKED	
						DWG NO. / 図番		APPROVED	
						BJS 6407004		SHEET/REV	
								2/2 B	

KYOCERA