

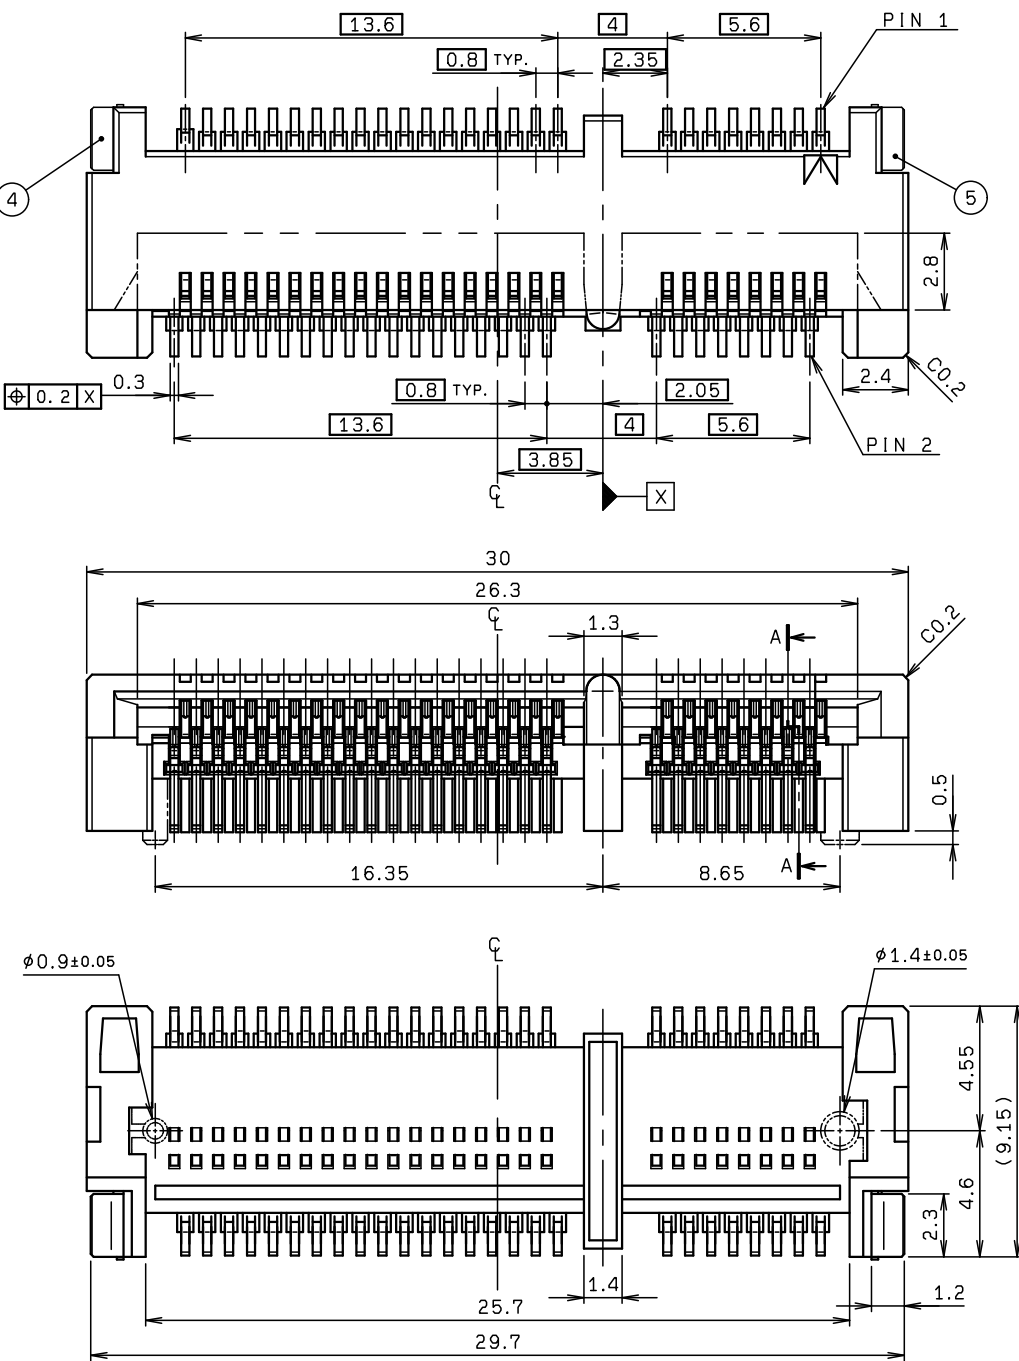
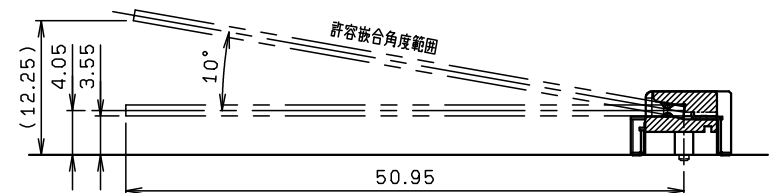


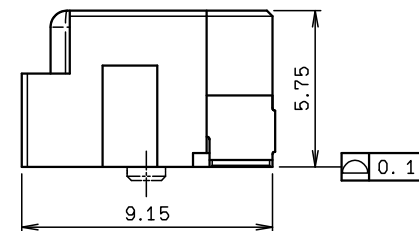


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTED RESIN		UL94V-0
2	CONTACT (UPPER)		26	COPPER ALLOY		
3	CONTACT (LOWER)		26	COPPER ALLOY		
4	ANCHOR PLATE (L)		1	COPPER ALLOY		
5	ANCHOR PLATE (R)		1	COPPER ALLOY		

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

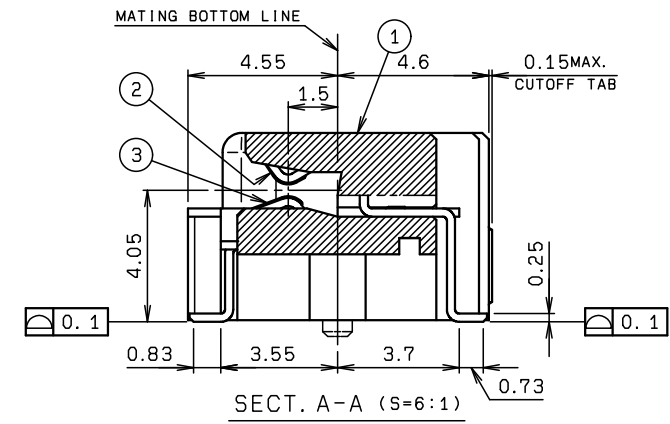

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT		ANGLE					
		mm		3RD		A DCN20760		2020/08/05	
						O EDN-211		2014/04/24	
ANGLE / 角度		SCALE		DATE		NO.		EDN/DCN	
±3°		5 : 1		2014/04/24		DATE		ISSUE	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NAME / 品名	
M. TAKAHASHI		H. TAMA I				H. SADATOKU		SERIES 6407	
								Mini PCI-Express CONNECTOR ASSY	
								(H=+1.9mm (5.9))	
								PART NO. / 型番	
								24 6407 052 12X 894 +	
								DWG NO. / 図番	
								BJS 6407070	
								SHEET/REV	
								1/3 A	



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

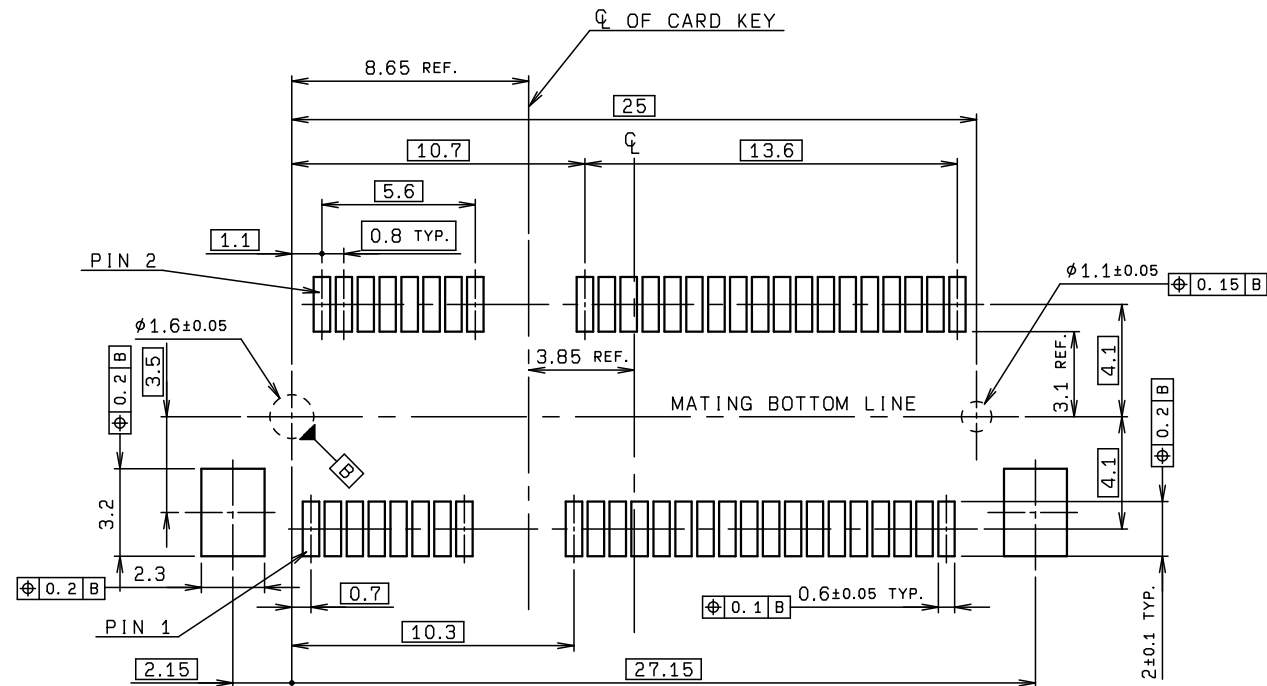


RECOMMENDED BOARD LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ ± 0.2 $30 \leq X$ ± 0.25 $30 \leq X$ ± 0.3		UNIT ANGLE mm 3RD		REFER TO SHEET		1/3			
ANGLE / 角度 $\pm 3^\circ$		SCALE DATE 5 : 1 2014/04/24		NO. EDN/DCN DATE ISSUE CHECKED APPROVED		PART NAME / 品名 SERIES 6407 Mini PCI-Express CONNECTOR ASSY (H=+1.9mm (5.9))			
DRAWN M. TAKAHASHI	DESIGNED H. TAMAI	CHECKED H. SADATOKU	APPROVED H. SADATOKU	PART NO. / 型番 24 6407 052 12X 894 +					
				DWG NO. / 図番 BJS 6407070				SHEET / REV 2 / 3 A	

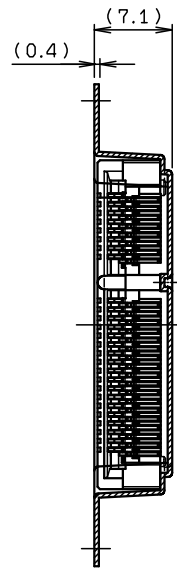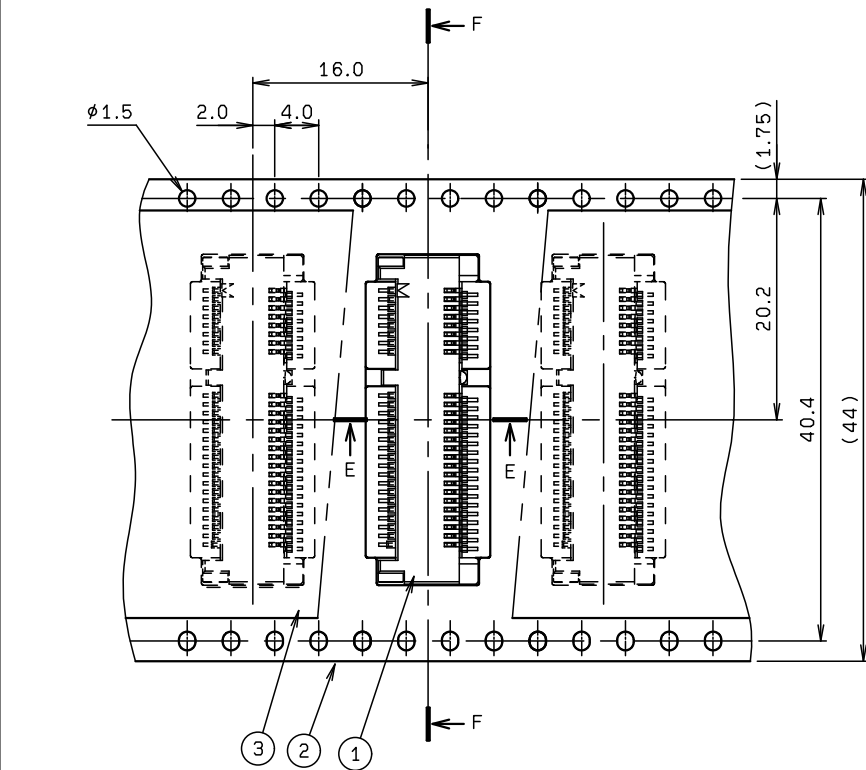

SECT. F-F

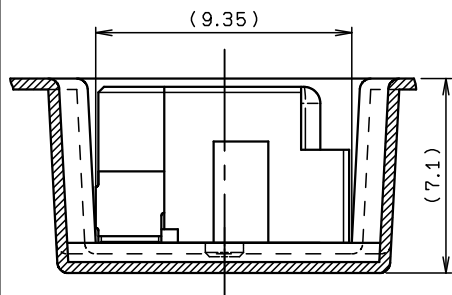

SECT. E-E (S=5:1)

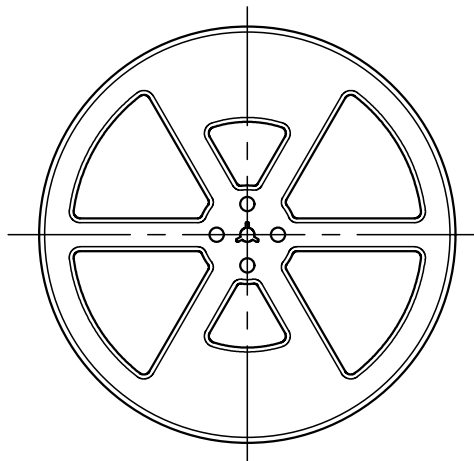


REEL DIMENSION (S=1:5)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	24 6407 052 12X 894 +	800			20 6407 052 12X 894 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

- 梱包数量 : 800 個/リール
PACKING QUANTITY : 800 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

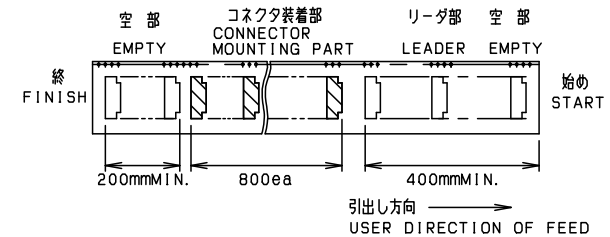

※この注記は3ページ目にも適用

※THIS NOTES IS APPLICABLE TO SHEET-3 ONLY.

型 番
P/N

24 6407 052 12X 894 +

NO. OF POS.
052 : 52PVARIATION
120: H=+1.9, WITHOUT BOSS
121: H=+1.9, WITH BOSSPLATING
894+ : CONTACT AREA Au 0.05 μ mMIN.
TAIL AREA Au 0.03 μ mMIN.
(ANCHOR PLATE Sn-Cu 2~4 μ m)ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
X <10 10≤ X <30 30≤ X	±0.2 ±0.25 ±0.3	UNIT		ANGLE		REFER TO SHEET		1/3		
		mm		3RD						
						NO.	EDN/DCN	DATE	ISSUE	CHECKED
ANGLE / 角度				SCALE		DATE		PART NAME / 品名		
±3°				2 : 1		2014/04/24		SERIES 6407 EMBOSS TAPE ASSY Mini-PCI Express CONNECTOR H=+1.9mm (5.9mm)		
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番		
M. TAKAHASHI		H. TAMA I				H. SADATOKU		24 6407 052 12X 894 +		
						DWG NO. / 図番			SHEET/REV	
						BJS 6407070			3/3 A	

KYOCERA