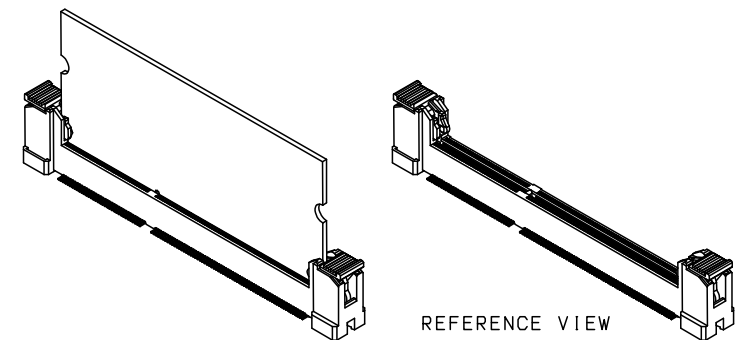
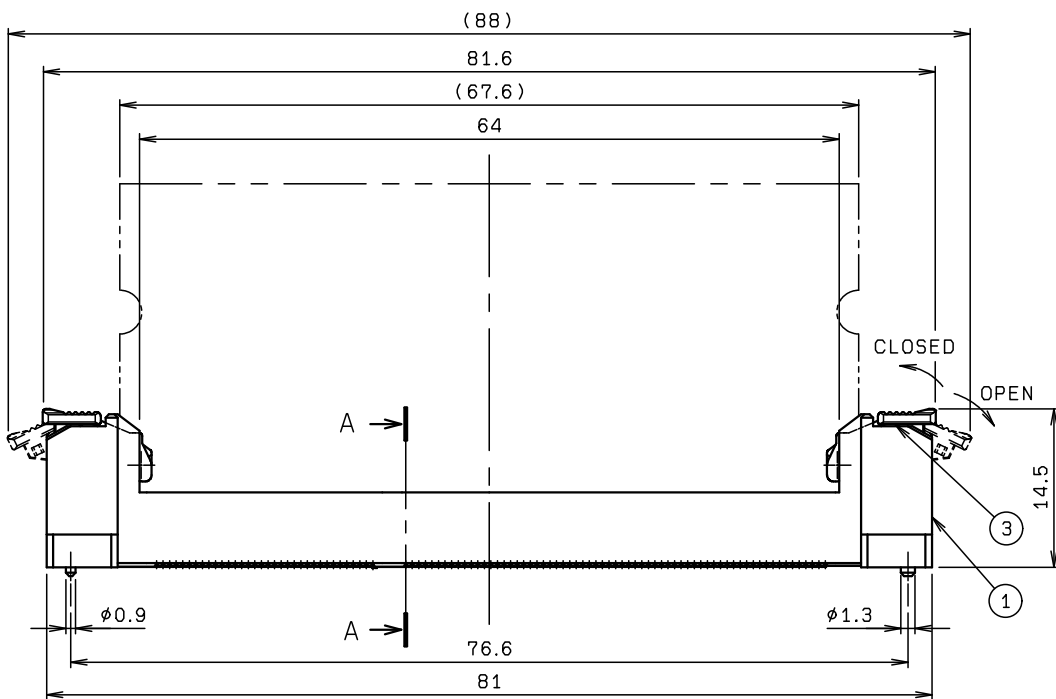
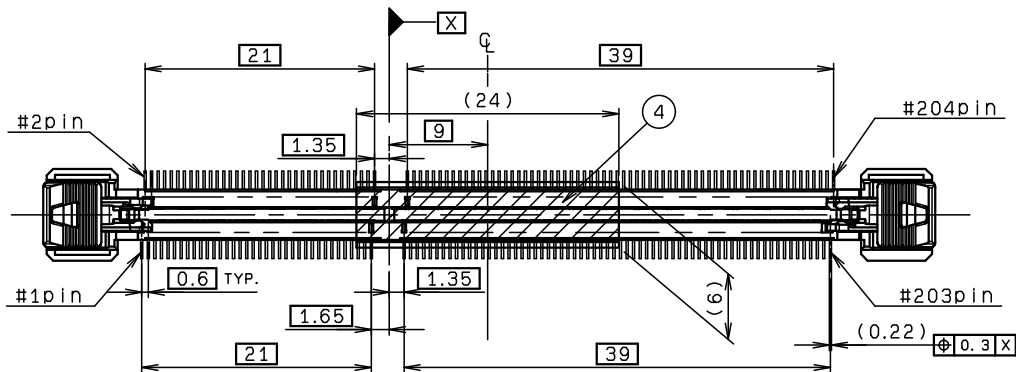


DETAIL "B" (S=15/1)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		BLACK UL94V-0
2	CONTACT		204	PHOS BRONZE		
3	EJECT LEVER		2	HEAT RESISTING RESIN		NATURAL
4	VACUUM TAPE		1	HEAT RESISTING TAPE		

注記
NOTE

1. リード部輪郭度: 0.1mmMAX.
READ COPLANARITY: 0.1mm MAX.
リフローピーク: 0.15mmMAX.



2. 肉盛み, 外觀形状は変更する可能性があります。

3. 型番 20 6409 204 XXX 856 +
P/N


VARIATION
002: WITH VACUUM TAPE/LEVER CLOSED
003: WITHOUT VACUUM TAPE/LEVER OPEN
004: WITH VACUUM TAPE/LEVER OPEN

PLATING
856: CONTACT AREA Au 0.1μmMIN.
TAIL AREA Sn-Cu

④ カード側パッド部めっき
PAD CARD PLATEING
Ni: 2μmMIN.
Au: 0.75μmMIN.
or Au: 0.1~0.75μm + LUBRICANT OIL
(KD-Au200:CHEMICAL DENSI)

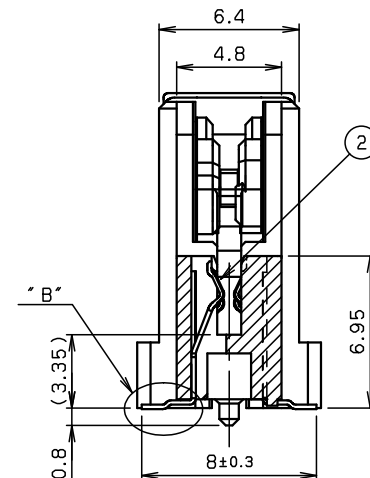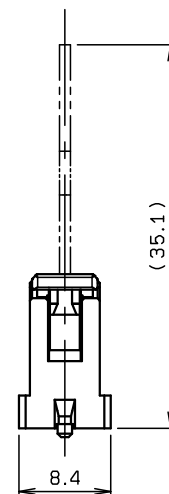

SECT. A-A (S=4/1)





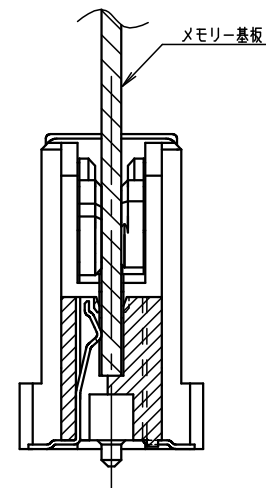


基板挿入状態
FORM OF MOUNTING BOARD

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN-086	2-02-12			
X < 10 ±0.2		UNIT		A	DCN-749	10-18-11	M. YOSHIDA		T. MORI
10 ≤ X < 30 ±0.25		mm		O	EDN-699	9-29-11	M. YOSHIDA		T. MORI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 2:1		PART NAME / 品名					
DRAWN M. TAKAHASHI		DESIGNED M. YOSHIDA		SERIES 6409					
CHECKED		APPROVED T. MORI		REC ASSY ST SMT for DDR3					
DWG NO. / 図番		PART NO. / 型番		20 6409 204 XXX 856 +					
KYOCERA		KYOCERA Corporation		DWG NO. / 図番					
				BJS 6409007					
				SHEET/REV 1/2 B					

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

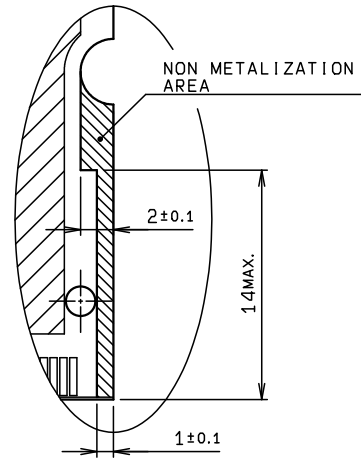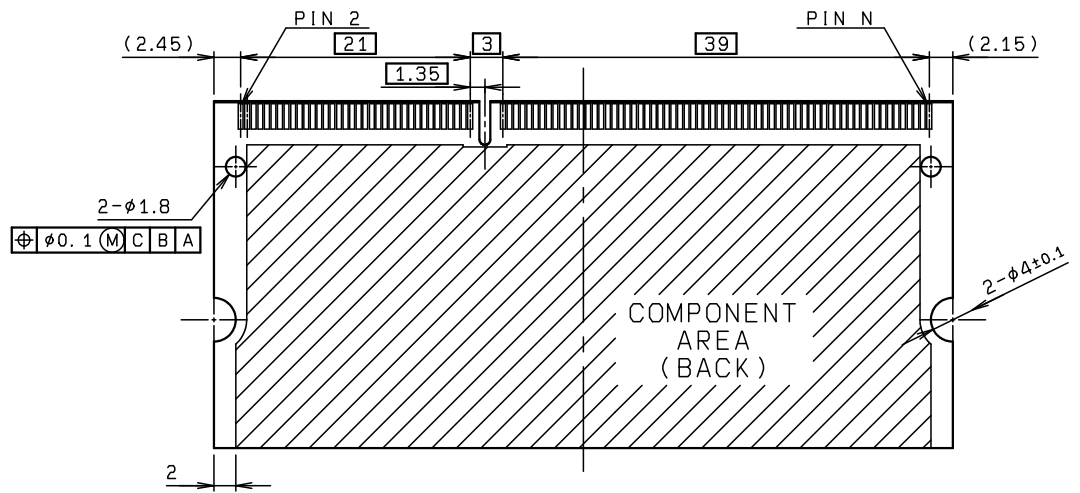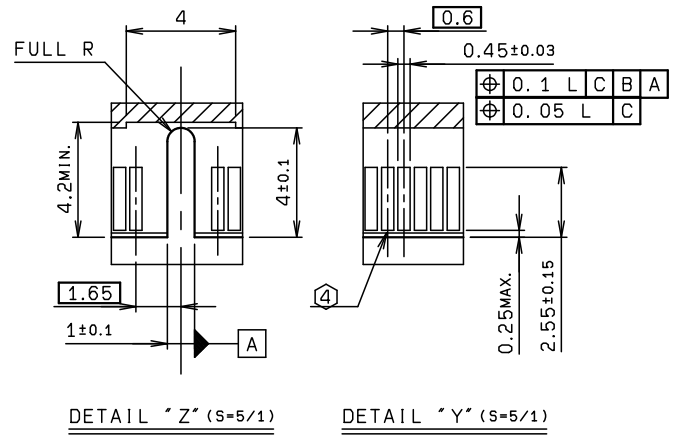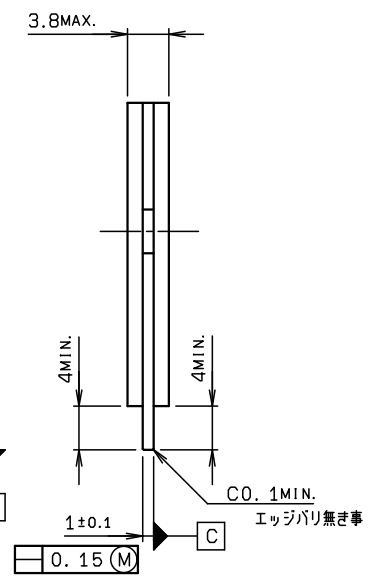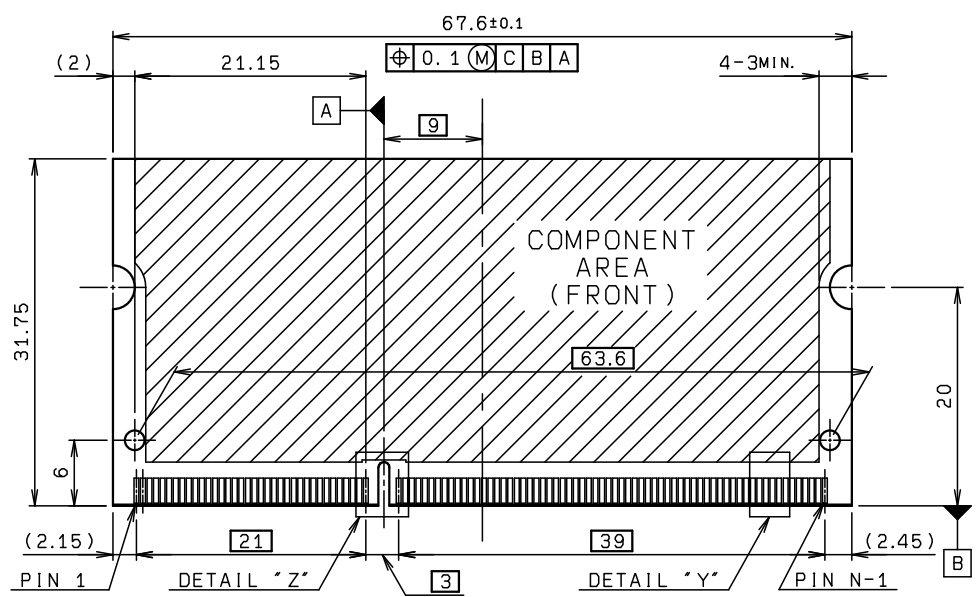



NON-METALIZATION DEFINITION

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

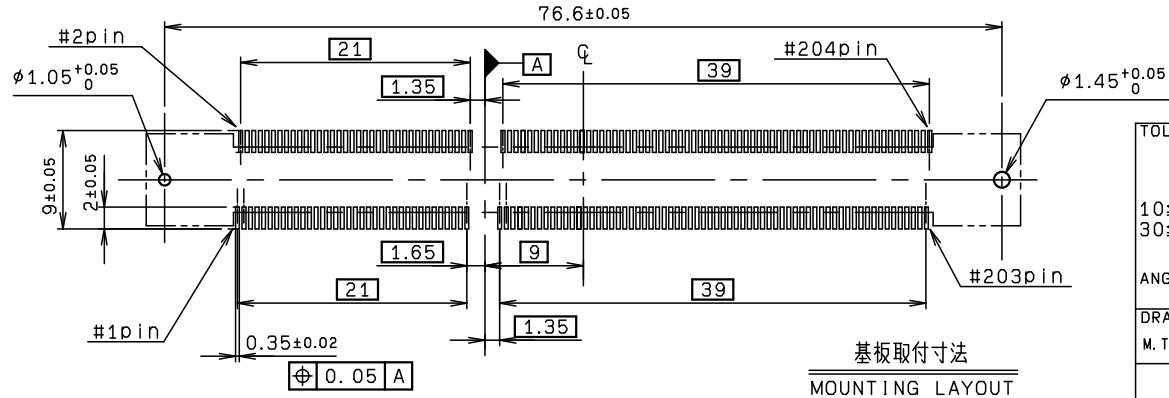

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格					
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2	
10 ≤ X < 30 ±0.25		SCALE 2 : 1		DATE 9-29-11		NO. EDN/DCN	
30 ≤ X ±0.3		ANGLE / 角度 ±3°		CHECKED T. MORI		DATE	
DRAWN M. TAKAHASHI		DESIGNED M. YOSHIDA		APPROVED		ISSUE	
						CHECKED	
						APPROVED	
						PART NAME / 品名	
						SERIES 6409	
						REC ASSY ST SMT	
						PART NO. / 型番	
						20 6409 204 XXX 856 +	
						DWG NO. / 図番	
						BJS 6409007	
						SHEET/REV	
						2/2 B	

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6409 204 XXX 856 +	26			
2	TRAY		1	PS		t=1.0

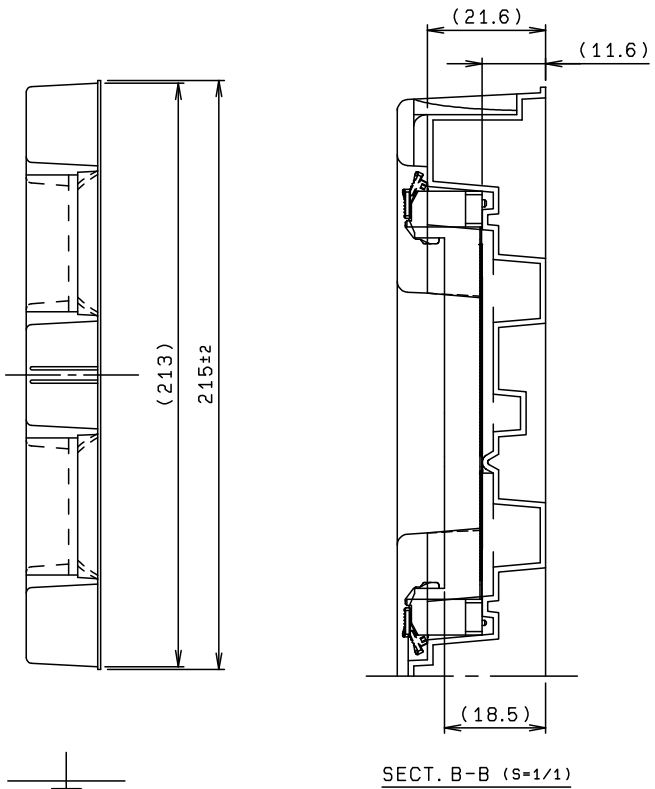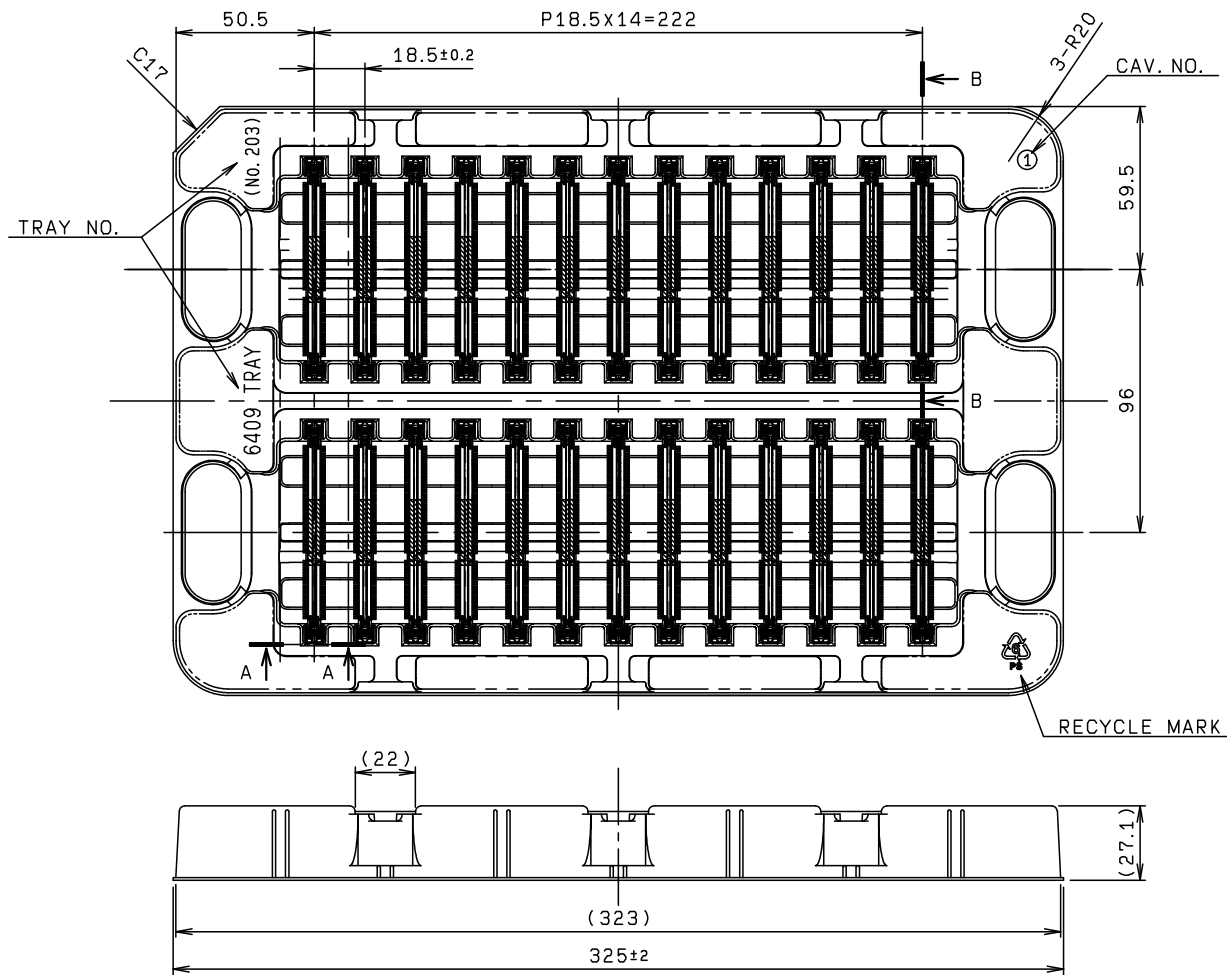

注 記
NOTE

1. 数量 26個/TRAY
QTY 26個/TRAY

2. 色 調 : 白
COLOR : WHITE

型 番
P/N

29 6409 204 XXX 856 +

PREFIX
29:REC TRAY ASSY

NO. OF POS.
204:204P

VARIATION
002:WITH VACUUM TAPE/LEVER CLOSED
003:WITHOUT VACUUM TAPE/LEVER OPEN
004:WITH VACUUM TAPE/LEVER OPEN

PLATING CODE
856:CONTACT AREA Au 0.1μmMIN.
TAIL AREA Sn-Cu

SECT. A-A (S=1/1)

SECT. B-B (S=1/1)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差			PRODUCT SPEC / 製品規格							
X ≤10 ±0.5 10< X ≤60 ±0.8 60< X ≤100 ±1.0 100< X ±1.5 ANGLE / 角度 ±2°			UNIT		ANGLE					
			mm		3RD					
			SCALE		DATE					
			1 : 2		9-29-11					
DRAWN			DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
M. TAKAHASHI			M. YOSHIDA				T. MORI		29 6409 204 XXX 856 +	
									DWG NO. / 図番	
									BJS 6409008	
									SHEET/REV	
									1/1 A	

KYOCERA KYOCERA Corporation