




ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

HALOGEN FREE


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 000 883 J	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

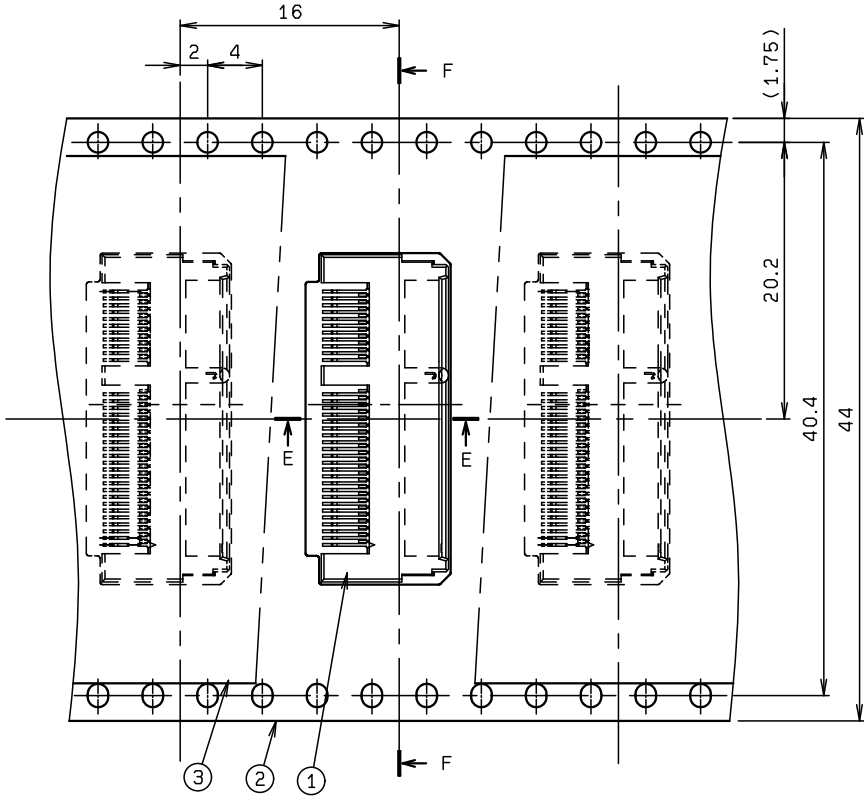


4

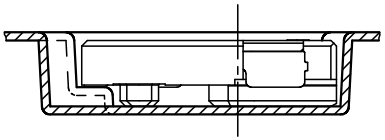

SECT. E-E (S=5/1)

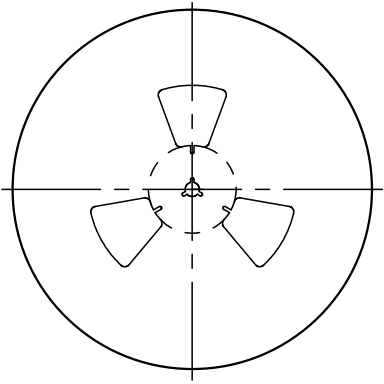


REEL DIMENSION (S=1/5)

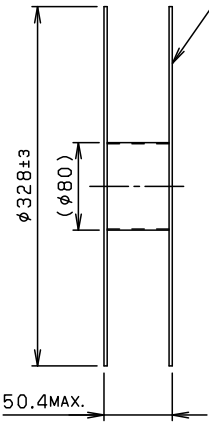


注 記
NOTE

- 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 pcs/Reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

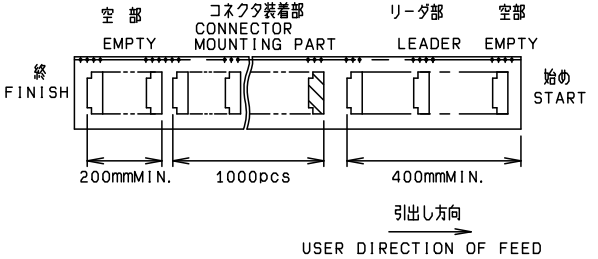

型 番
P/N

24 6411 067 000 883 J

- 極数 No. OF POS. _____
PCI-SIG STANDARD _____
0:M1.8 TYPE (HEIGHT 1.8MAX.)
VARIATION _____
0:WITH BOSS.WITH ANCHOR PLATE
PLATING CODE _____
883:NI UNDER COAT ALL OVER 1.5~5.0μm
CONTACT AREA Au 0.1μm MIN.
TAIL AREA Sn 1.5~4.0μm
KEYING _____
J:KEY J

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		F	DCN-1886	12-13-13			
X < 10 ±0.2		POLYSTYRENE (CLEAR)		E	DCN-278	2-25-13	H. TAMAI		Y. OKABE
10 ≤ X < 30 ±0.25		UNIT	ANGLE	0	EDN-568	8-01-12	H. TAMAI		Y. OKABE
30 ≤ X ±0.3		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE	DATE	PART NAME / 品名					
		NTS	8-01-12	SERIES 6411 EMBOSS TAPE ASSY					
DRAWN H. TAMAI		DESIGNED H. TAMAI	CHECKED	APPROVED	M.2 CONNECTOR M1.8 KEY J				
				Y. OKABE	PART NO. / 型番				
					24 6411 067 000 883 J				
					DWG NO. / 図番				
					BJS 6411009				
					SHEET/REV				
					1/2 F				



KYOCERA Corporation

1/2 F

