

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS


HALOGEN FREE

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 101 894 B	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

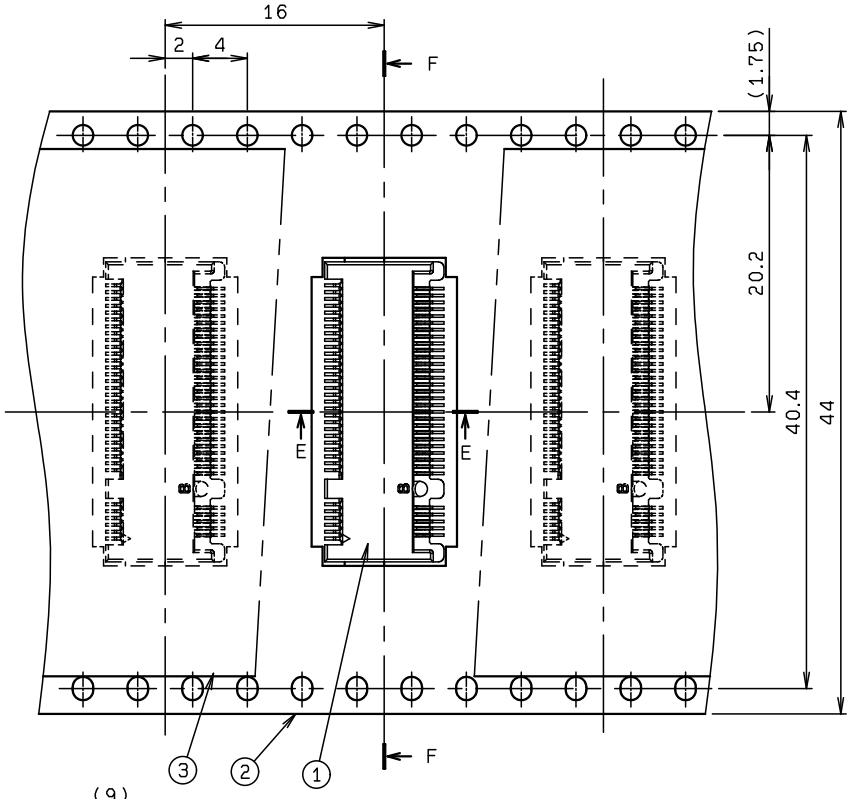


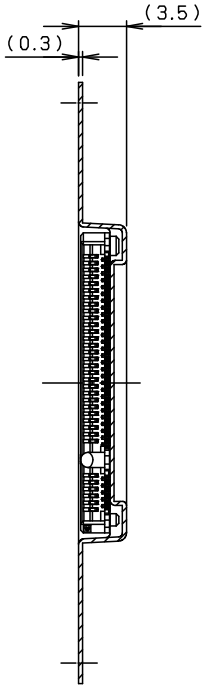


SECT. F-F

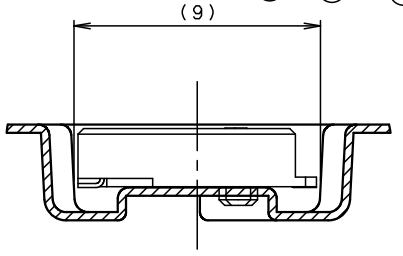

SECT. E-E (S=5/1)

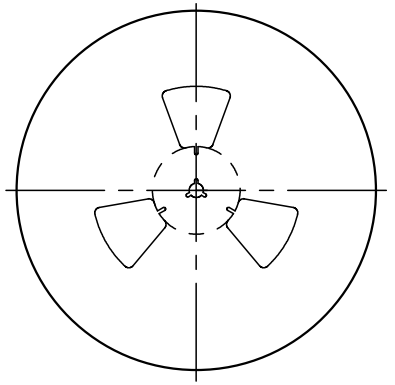


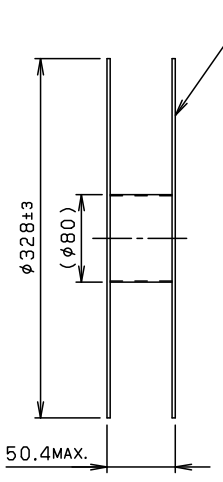


REEL DIMENSION (S=1/5)

注 記
NOTE

1. 梱包数量 : 1000 個/リール
   PACKING QUANTITY : 1000 pcs/Reel
2. 納入時のリール巻き方向
   REELING DIRECTION
   IN DELIVERY

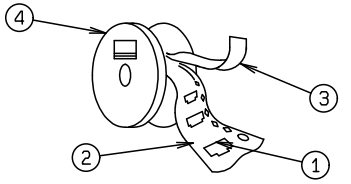

3. 引出し方向
   USER DIRECTION OF FEED

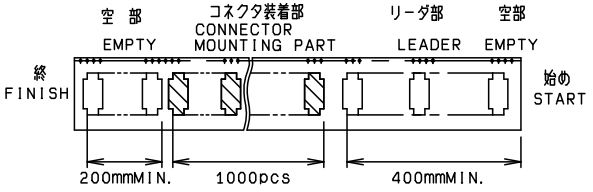

4. 型 番 24 6411 067 101 894 B
   P/N
   4:EMBOSS ASSY
   極数 NO. OF POS.
   PCI-SIG STANDARD
   1:H2.3 TYPE (HEIGHT 2.25MAX.)
   VARIATION
   1:WITH BOSS, WITHOUT ANCHOR PLATE
   PLATING CODE
   894:NI UNDER COAT ALL OVER 1.5~5.0μm
   CONTACT AREA Au 0.05μm MIN.
   TAIL AREA Au 0.03μm MIN.
   KEYING
   B:KEY B

H	DCN-039	1-11-14	H. TAMAI			H. SADATOKU
G	DCN-751	5-28-13	H. TAMAI			Y. OKABE
O	EDN-569	8-01-12	H. TAMAI			Y. OKABE
NO.	EDN/DCN	DATE	ISSUE	CHECKED		APPROVED

TOLERANCE / 一般公差(S)
X <10 ±0.2
10≦ X <30 ±0.25
30≦ X ±0.3
ANGLE / 角度 ±3°

PRODUCT SPEC / 製品規格: POLYSTYRENE(CLEAR)
UNIT: mm
ANGLE: 3RD
SCALE: N.T.S
DATE: 8-01-12

DRAWN	DESIGNED	CHECKED	APPROVED
H. TAMAI	H. TAMAI		Y. OKABE


KYOCERA Corporation


PART NAME / 品名
SERIES 6411 EMBOSS TAPE ASSY
M. 2 CONNECTOR H2.3 KEY B

PART NO. / 型番
24 6411 067 101 894 B

DWG NO. / 図番
BJS 6411014

SHEET 1/2 REV H

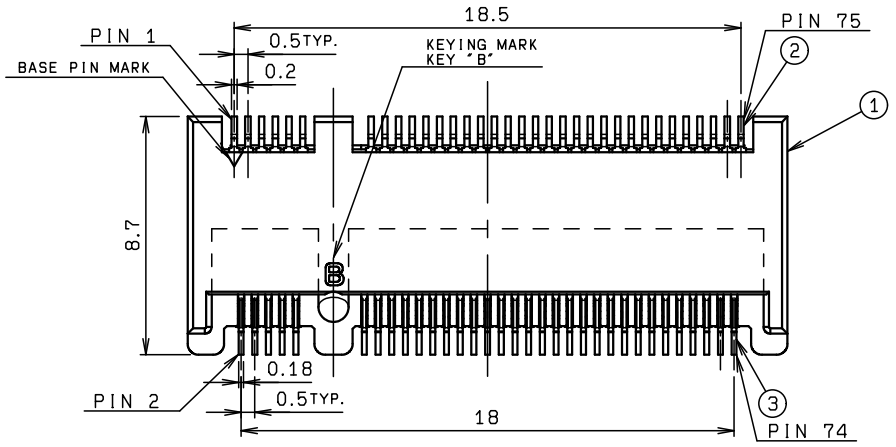

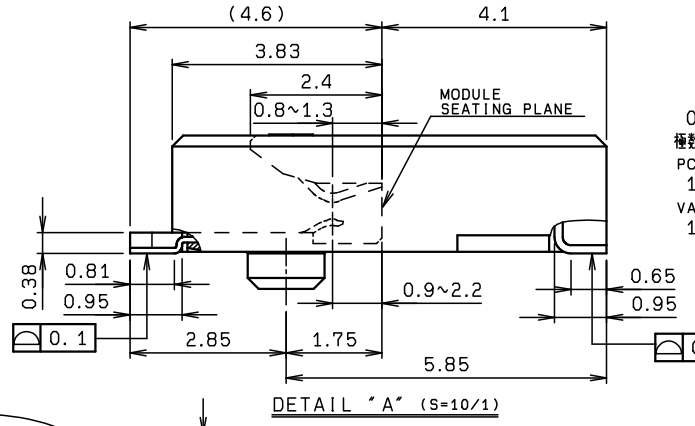

DETAIL "A" (S=10/1)

注記 NOTES

型番 P/N 20 6411 067 101 894 B

0：CONNECTOR ASSY

極数 No. OF POS.

PCI-SIG STANDARD

1：H2.3 TYPE (HEIGHT 2.25MAX.)

VARIATION


1：WITH BOSS, WITHOUT ANCHOR PLATE


PLATING CODE


894：Ni UNDER COAT ALL OVER 1.5~5.0μm
CONTACT AREA Au 0.05μm MIN.
TAIL AREA Au 0.03μm MIN.


KEYING

B：KEY B

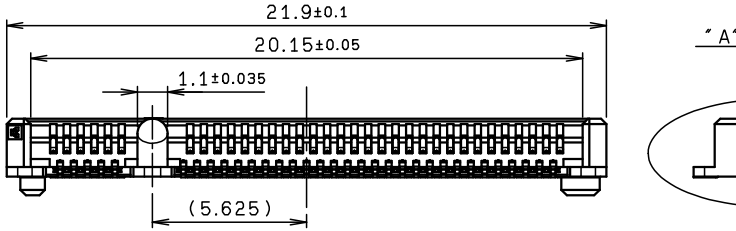


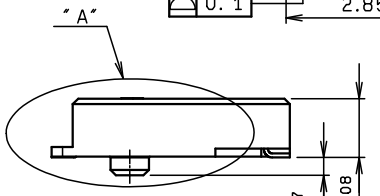

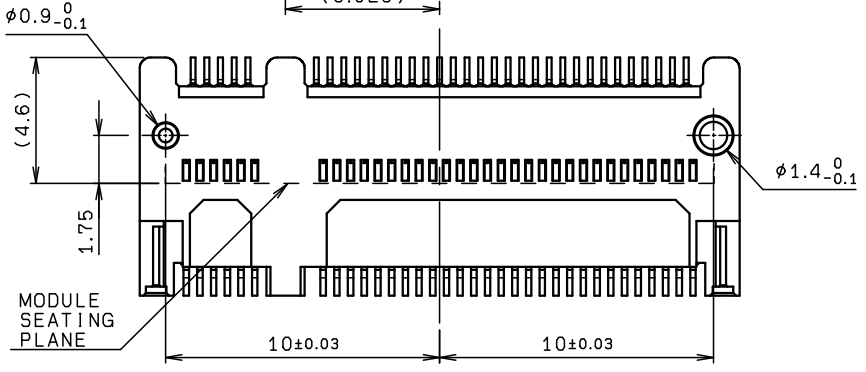

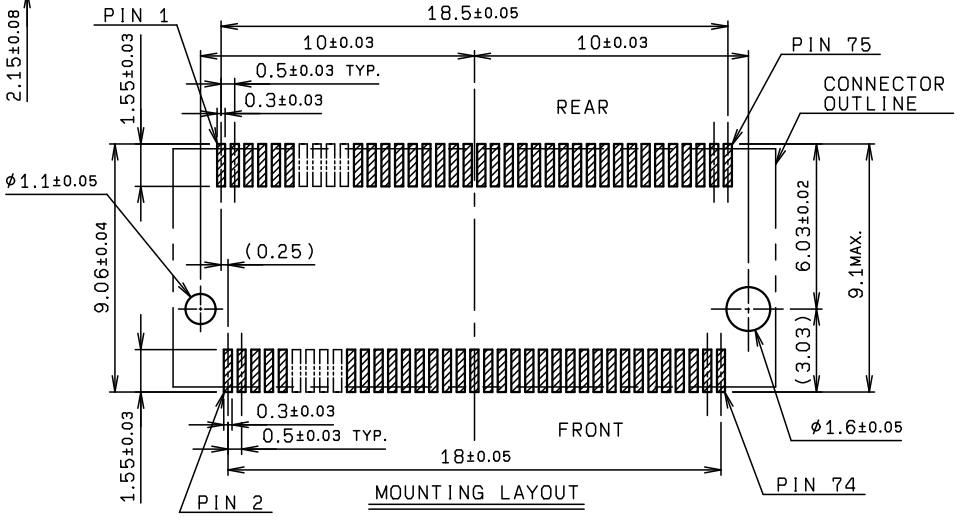

MOUNTING LAYOUT

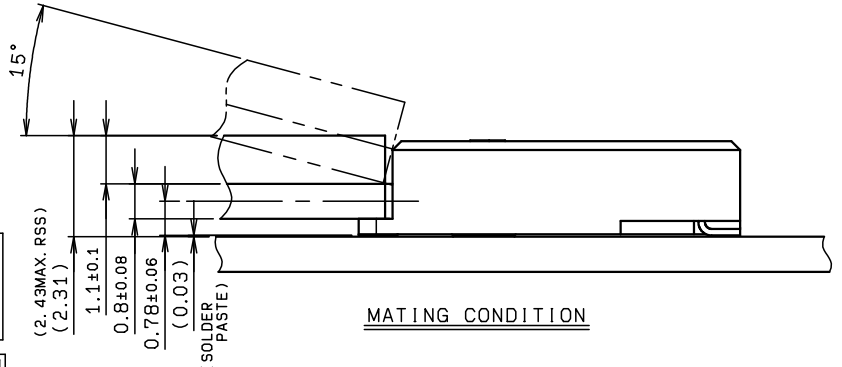

MATING CONDITION

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESIST RESIN		
2	UPPER CONTACT		34	COPPER ALLOY		
3	LOWER CONTACT		33	COPPER ALLOY		

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

HALOGEN FREE

TOLERANCE / 一般公差(S)	PRODUCT SPEC / 製品規格				
X <10 ±0.2 10≦X <30 ±0.25 30≦X ±0.3	UNIT mm	ANGLE 3RD			
ANGLE / 角度 ±3°	SCALE NTS	DATE 8-01-12			
DRAWN H. TAMAI	DESIGNED H. TAMAI	CHECKED	APPROVED Y. OKABE		

KYOCERA KYOCERA Corporation

REFER TO SHEET 1/2

NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED

PART NAME / 品名
SERIES 6411 ASSY RA SMT
M.2 CONNECTOR H2.3 KEY B

PART NO. / 型番
20 6411 067 101 894 B

DWG NO. / 図番 BJS 6411014

SHEET 2/2 REV H