
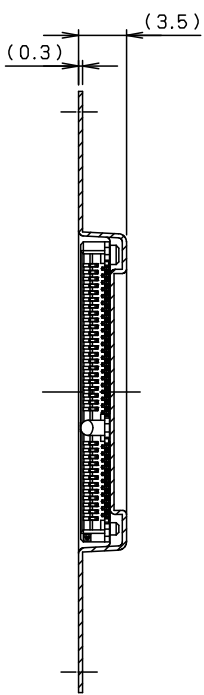



ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

HALOGEN FREE


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 101 894 E	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

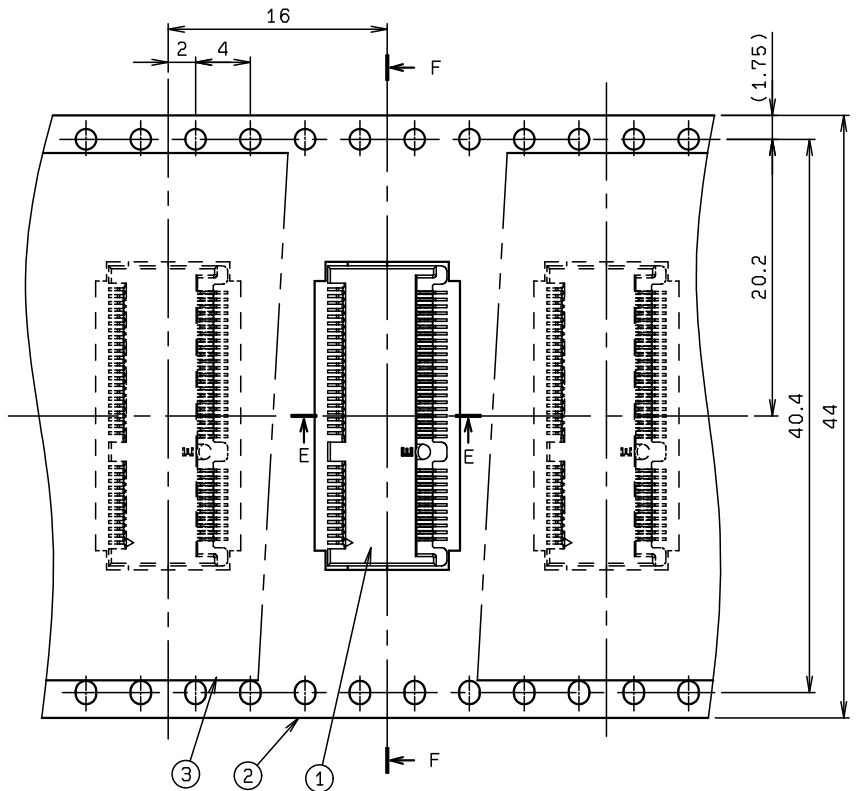


SECT. F-F

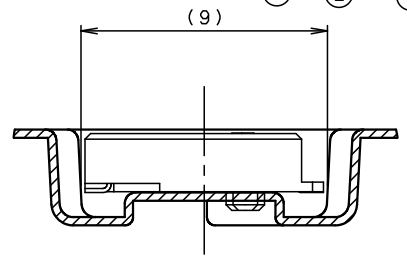

SECT. E-E (S=5/1)

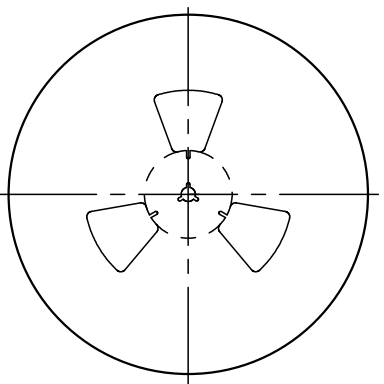


REEL DIMENSION (S=1/5)

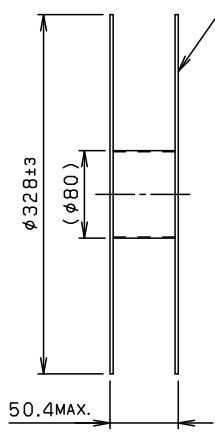


注 記
NOTE

- 1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 pcs/Reel
- 2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

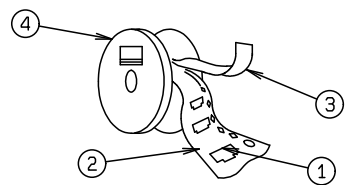

3. 引出し方向






USER DIRECTION OF FEED

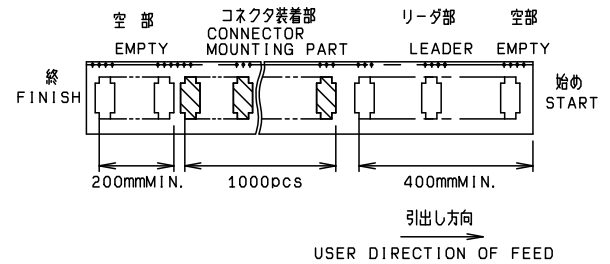


4. 型番

- P/N 24 6411 067 101 894 E
- 4:EMBOSS ASSY
- 極数 No. OF POS. 24
- PCI-SIG STANDARD
- 1:H2.3 TYPE (HEIGHT 2.25MAX.)
- VARIATION 1:WITH BOSS.WITHOUT ANCHOR PLATE
- PLATING CODE
- 894:NI UNDER COAT ALL OVER 1.5~5.0μm
- CONTACT AREA AU 0.05μm MIN.
- TAIL AREA AU 0.03μm MIN.
- KEYING
- E:KEY E


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		H	DCN-039	1-11-14	H. TAMAI		H. SADATOKU
X < 10 ±0.2		POLYSTYRENE (CLEAR)		G	DCN-751	5-28-13	H. TAMAI		Y. OKABE
10 ≤ X < 30 ±0.25		UNIT	ANGLE	O	EDN-569	8-01-12	H. TAMAI		Y. OKABE
30 ≤ X ±0.3		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE	DATE	PART NAME / 品名					
		NTS	8-01-12	SERIES 6411 EMBOSS TAPE ASSY					
DRAWN	DESIGNED	CHECKED	APPROVED	M.2 CONNECTOR H2.3 KEY E					
H. TAMAI	H. TAMAI		Y. OKABE	PART NO. / 製番					
KYOCERA		KYOCERA Corporation		24 6411 067 101 894 E					
				DWG NO. / 図番					
				BJS 6411017					
				SHEET/REV					
				1/2 H					

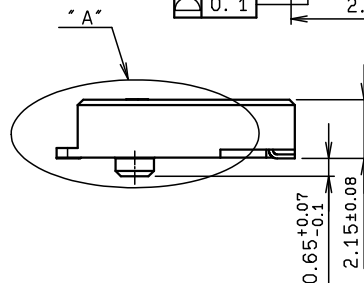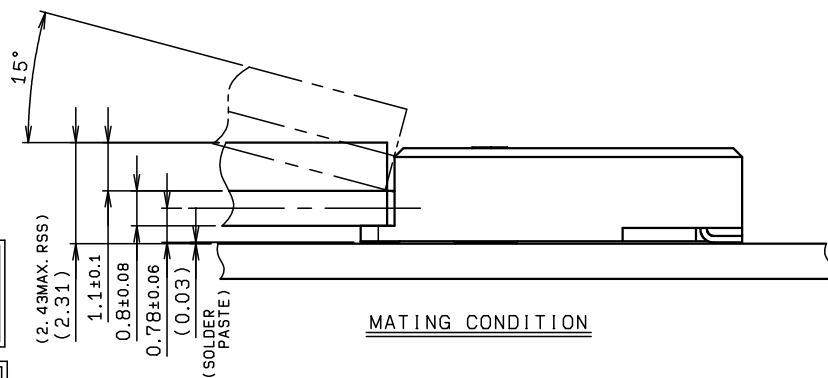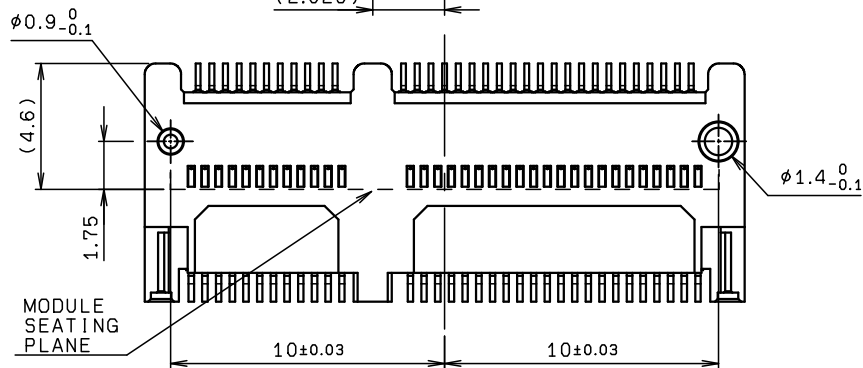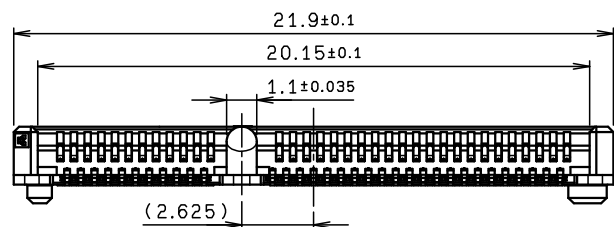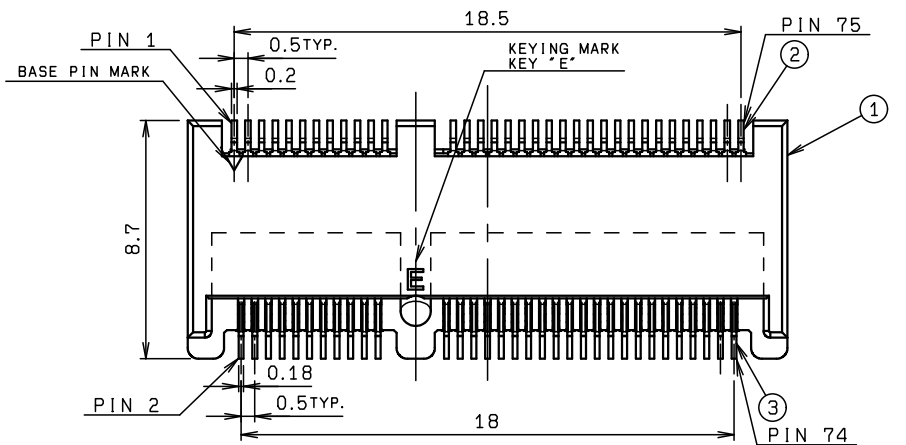

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESIST RESIN		
2	UPPER CONTACT		34	COPPER ALLOY		
3	LOWER CONTACT		33	COPPER ALLOY		

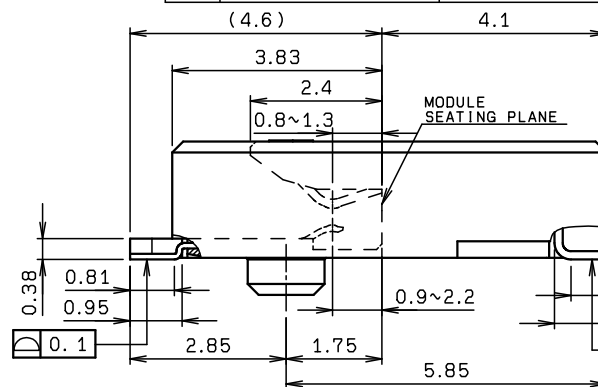

注記 NOTES
 型番 P/N 20 6411 067 101 894 E
 0: CONNECTOR ASSY
 極数 No. OF POS. PCI-SIG STANDARD
 1:H2.3 TYPE (HEIGHT 2.25MAX.)
 VARIATION 1:WITH BOSS.WITHOUT ANCHOR PLATE
 PLATING CODE
 894: NI UNDER COAT ALL OVER 1.5~5.0μm
 CONTACT AREA AU 0.05μm MIN.
 TAIL AREA AU 0.03μm MIN.
 KEYING E: KEY E

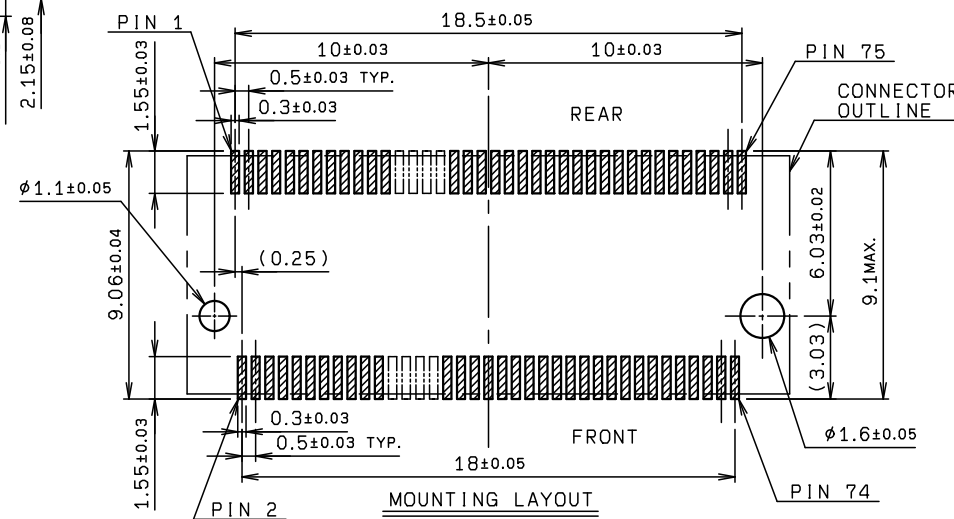

ROHS規制対応
 COMPLIANT WITH
 ROHS REGULATIONS

HALOGEN FREE

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25									
30 ≤ X ±0.3									
ANGLE / 角度 ±3°		SCALE NTS		DATE 8-01-12		PART NAME / 品名			
DRAWN H. TAMAI		DESIGNED H. TAMAI		CHECKED		APPROVED Y. OKABE		PART NO. / 型番	
								20 6411 067 101 894 E	
								DWG NO. / 図番	
								BJS 6411017	
								SHEET/REV	
								2/2 H	

KYOCERA

KYOCERA Corporation