
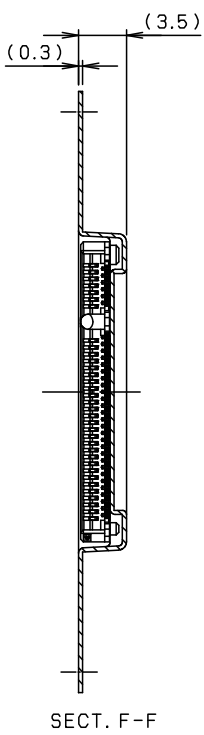


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


HALOGEN FREE

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 101 894 L	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

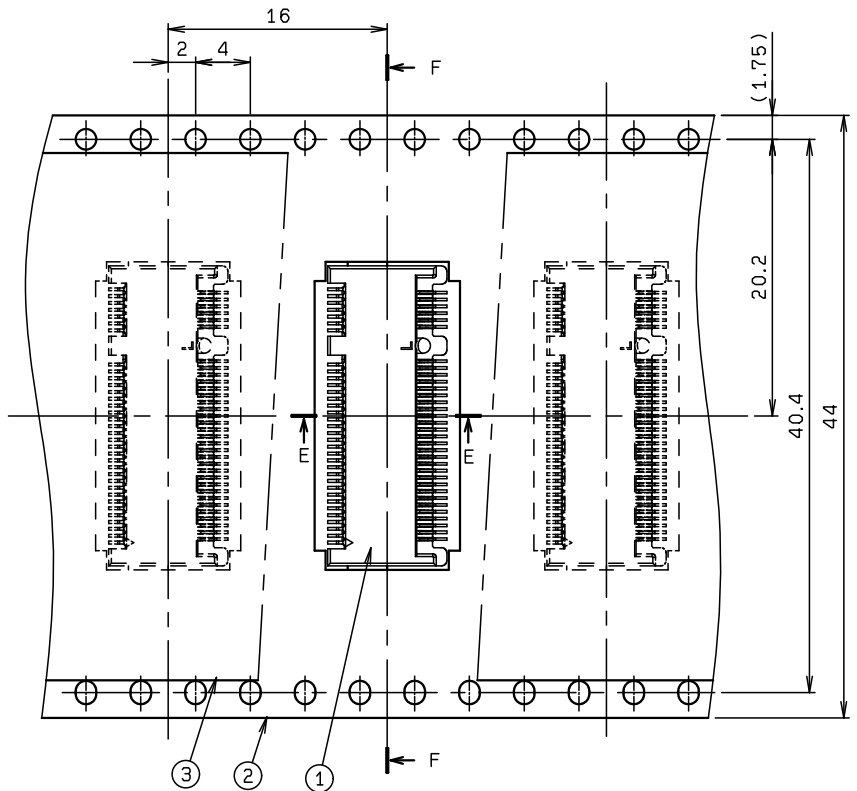


注 記
NOTE

1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 pcs/Reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向




USER DIRECTION OF FEED

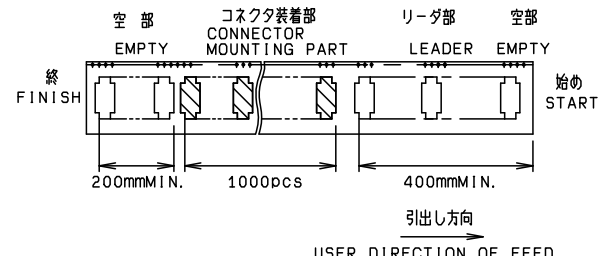

4. 型番
P/N

24 6411 067 101 894 L

極数 No. OF POS. _____
PCI-SIG STANDARD _____
1: H2.3 TYPE (HEIGHT 2.25MAX.)
VARIATION _____
1: WITH BOSS. WITHOUT ANCHOR PLATE
PLATING CODE _____
894: NI UNDER COAT ALL OVER 1.5~5.0µm
CONTACT AREA AU 0.05µm MIN.
TAIL AREA AU 0.03µm MIN.
KEYING _____
L: KEY L

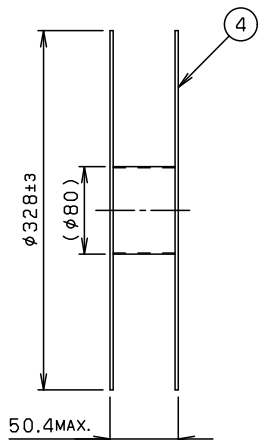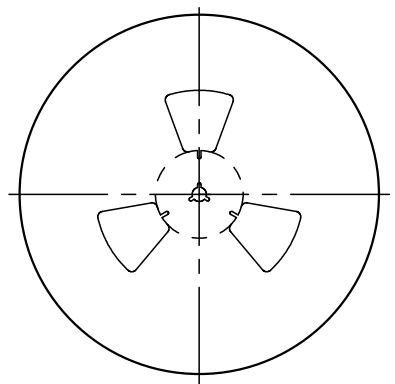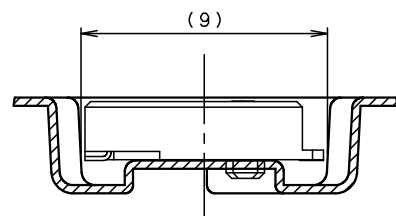





TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		E	DCN-039	1-11-14	H. TAMAI		H. SADATOKU
X < 10 ±0.2		POLYSTYRENE (CLEAR)		D	DCN-1887	12-17-13	H. TAMAI		H. SADATOKU
10 ≤ X < 30 ±0.25		UNIT	ANGLE	O	EDN-569	8-01-12	H. TAMAI		Y. OKABE
30 ≤ X ±0.3		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE	DATE	PART NAME / 品名					
		NTS	8-01-12	SERIES 6411 EMBOSS TAPE ASSY					
DRAWN H. TAMAI		DESIGNED H. TAMAI	CHECKED	APPROVED Y. OKABE	M.2 CONNECTOR H2.3 TAPE KEY L				
					PART NO. / 型番				
					24 6411 067 101 894 L				
					DWG NO. / 図番				
					BJS 6411023				
					SHEET/REV				
					1/2 E				



KYOCERA Corporation

SHEET/REV



1/2 E

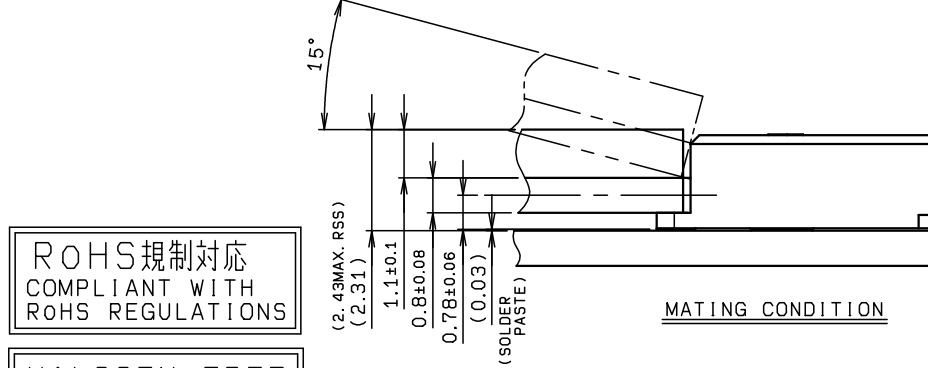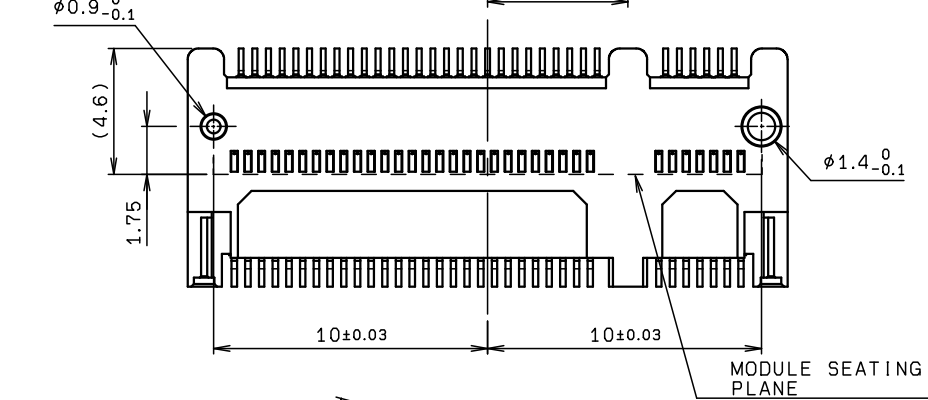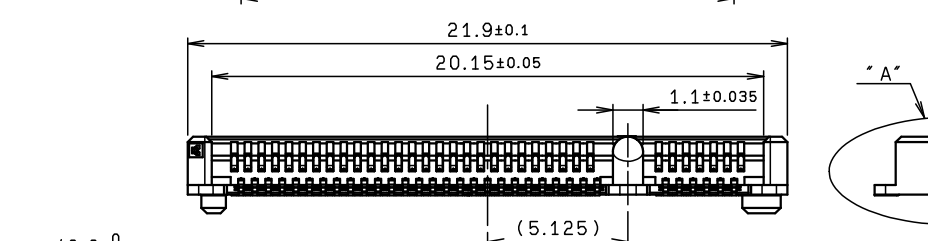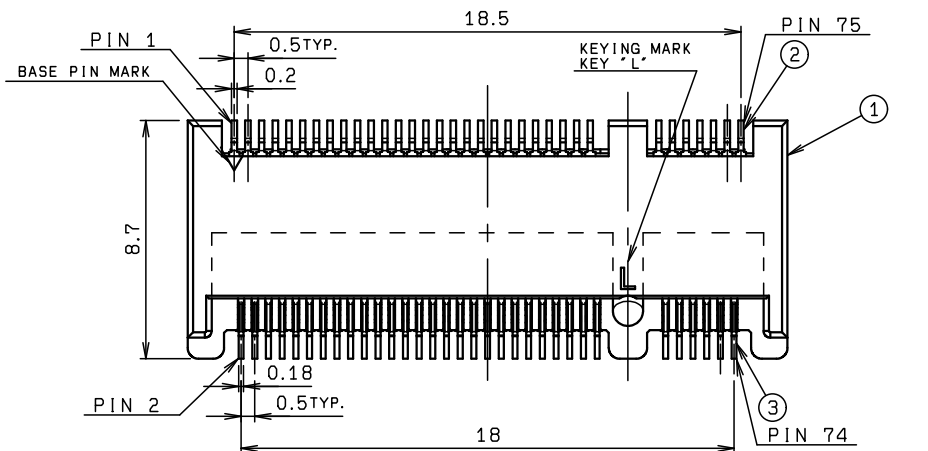

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

HALOGEN FREE

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESIST RESIN		
2	UPPER CONTACT		34	COPPER ALLOY		
3	LOWER CONTACT		33	COPPER ALLOY		

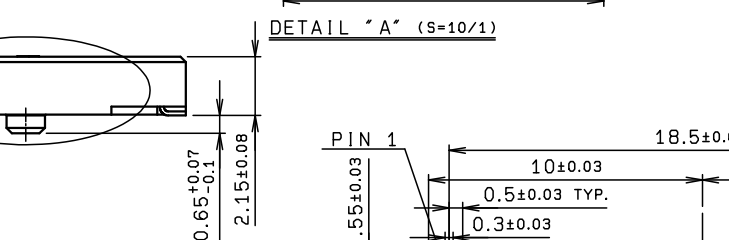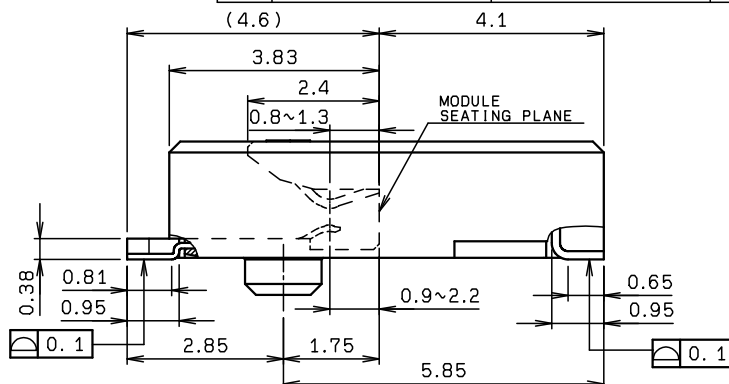


注記 NOTES

型番 20 6411 067 101 894 L
P/N

極数 No. OF POS. 101
PCI-SIG STANDARD 1: H2.3 TYPE (HEIGHT 2.25MAX.)
VARIATION 1: WITH BOSS, WITHOUT ANCHOR PLATE
PLATING CODE 894: NI UNDER COAT ALL OVER 1.5~5.0µm
CONTACT AREA AU 0.05µm MIN.
TAIL AREA AU 0.03µm MIN.

KEYING
L: KEY L

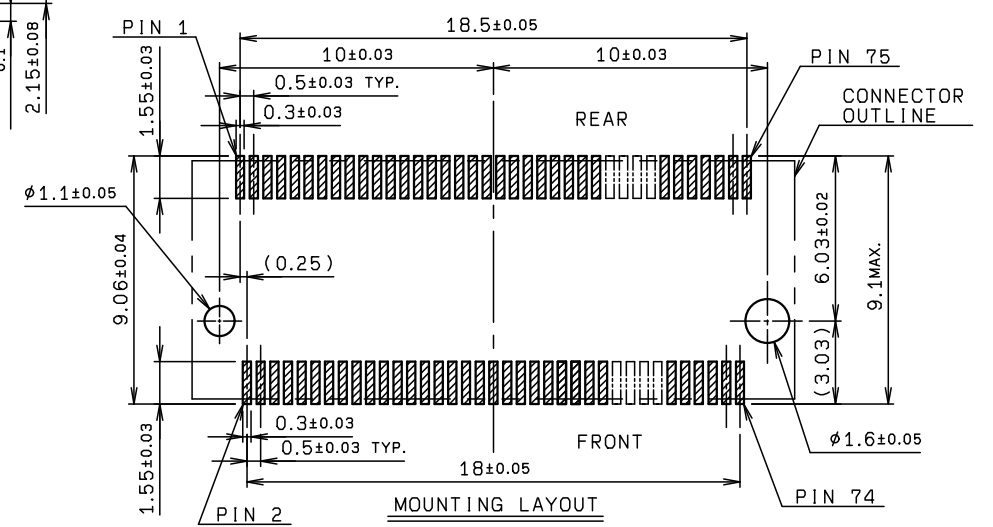

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2		UNIT		ANGLE		REFER TO		SHEET 1/2	
10≤ X <30 ±0.25		mm		3RD		NO.		EDN/DCN	
30≤ X ±0.3						DATE		ISSUE	
ANGLE / 角度		SCALE		DATE		PART NAME / 品名			
±3°		NTS		8-01-12		SERIES 6411 ASSY RA SMT			
						M.2 CONNECTOR H2.3 TYPE KEY L			
DRAWN		DESIGNED		CHECKED		PART NO. / 型番			
H. TAMAI		H. TAMAI		Y. OKABE		20 6411 067 101 894 L			
DWG NO. / 図番						SHEET/REV			
BJS 6411023						2/2		E	

KYOCERA Corporation