
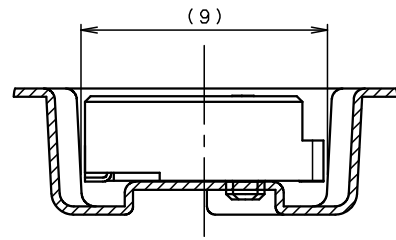
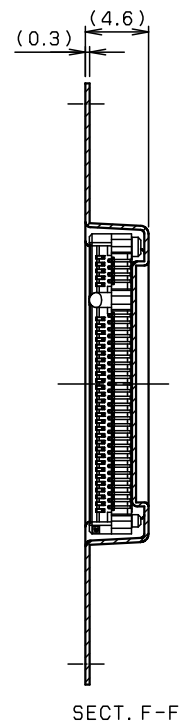



ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

HALOGEN FREE


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 401 894 M	800			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

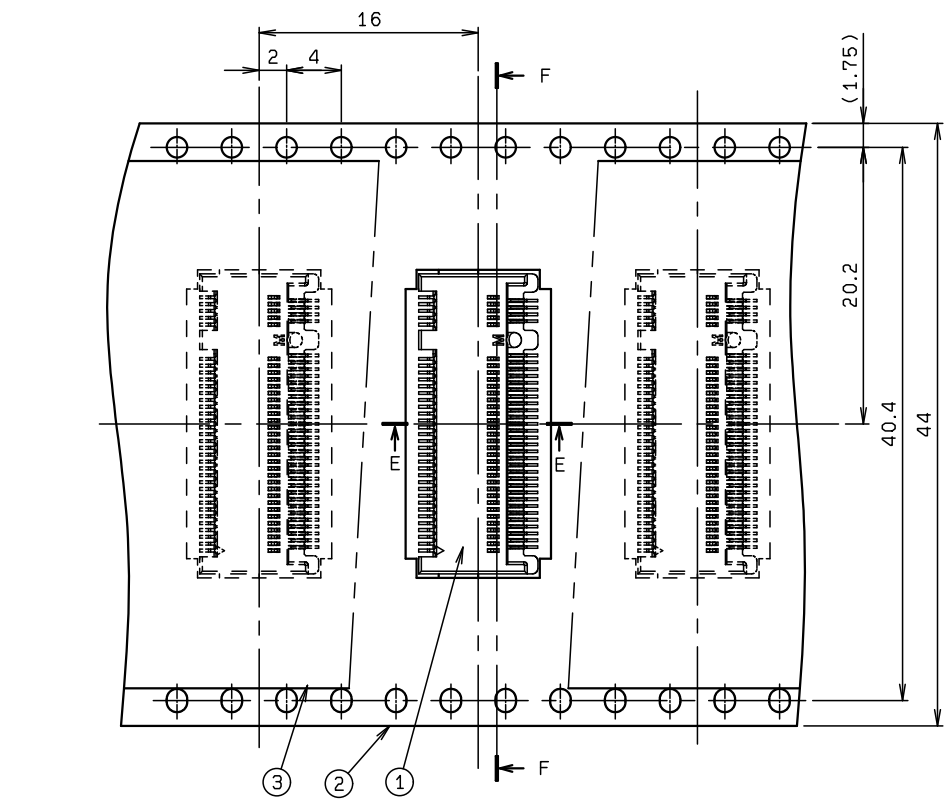

SECT. E-E (S=5/1)

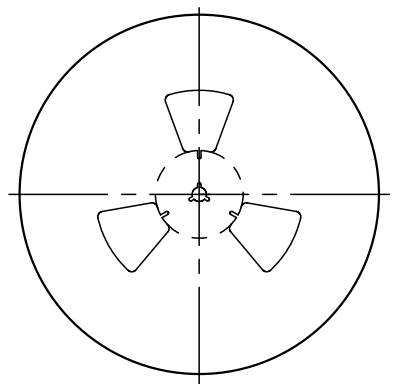


REEL DIMENSION (S=1/5)

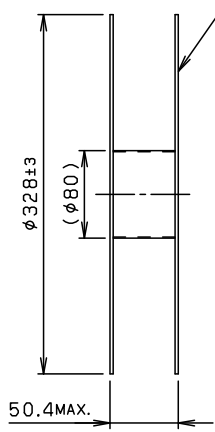


注 記
NOTE

1. 梱包数量 : 800 個/リール
PACKING QUANTITY : 800 pcs/Reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

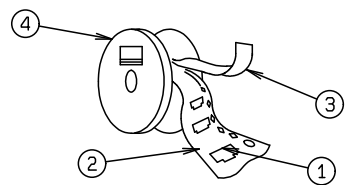

3. 引出し方向

USER DIRECTION OF FEED

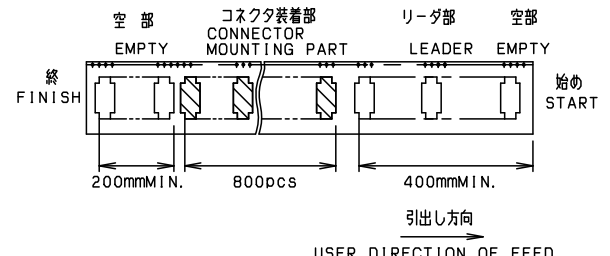

4. 型 番
P/N 24 6411 067 401 894 M

極数 No. OF POS. _____
PCI-SIG STANDARD _____
4:H3.2 TYPE (HEIGHT 3.2MAX.) _____
VARIATION _____
1:WITH BOSS,WITHOUT ANCHOR PLATE _____
PLATING CODE _____
894:NI UNDER COAT ALL OVER 1.5~5.0μm
CONTACT AREA AU 0.05μm MIN.
TAIL AREA AU 0.03μm MIN.
KEYING _____
M:KEY M

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格 POLYSTYRENE (CLEAR)		E	DCN-752	5-28-13	H. TAMAI		Y. OKABE
				D	DCN-237	2-19-13	H. TAMAI		Y. OKABE
UNIT mm		ANGLE 3RD		O	EDN-570	8-01-12	H. TAMAI		Y. OKABE
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NTS		PART NAME / 品名 SERIES 6411 EMBOSS TAPE ASSY M.2 CONNECTOR H3.2 TYPE KEY M					
DRAWN H. TAMAI	DESIGNED H. TAMAI	CHECKED	APPROVED Y. OKABE	PART NO. / 型番 24 6411 067 401 894 M					
				DWG NO. / 図番 BJS 6411036					



KYOCERA Corporation

