


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

HALOGEN FREE

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 6411 067 101 894 E	1000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 pcs/Reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED


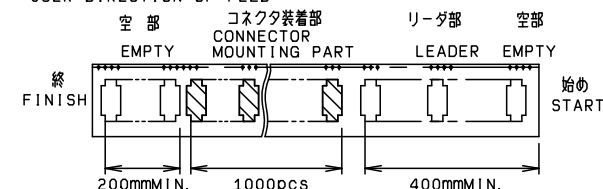


引出し方向
USER DIRECTION OF FEED


4. 型 番
P/N 25 6411 067 101 894 E
- 梱包 PACKING 5: EMBOSS ASSY (REVERSE PACKING)
- 極数 No. OF POS. PCI-SIG STANDARD 1: H2.3 TYPE (HEIGHT 2.25MAX.)
- VARIATION 1: WITH BOSS, WITHOUT ANCHOR PLATE
- PLATING CODE 894: NI UNDER COAT ALL OVER 1.5~5.0μm
CONTACT AREA AU 0.05μm MIN.
TAIL AREA AU 0.03μm MIN.
- KEYING E: KEY E

SECT. F-F


4

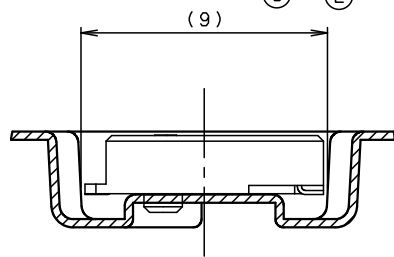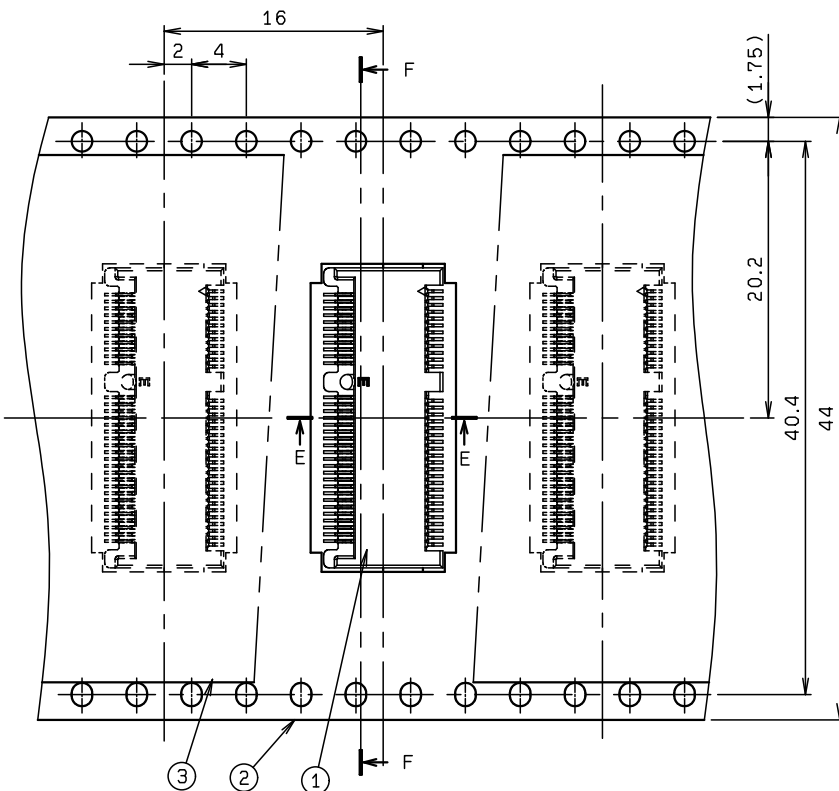

SECT. E-E (S=5/1)

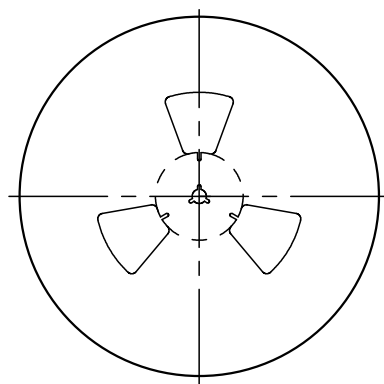

REEL DIMENSION (S=1/5)

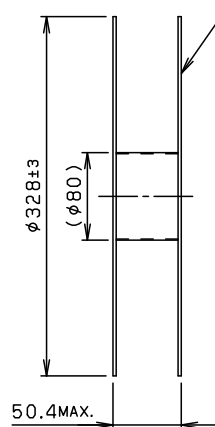


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		POLYSTYRENE (CLEAR)		A		DCN-040		1-10-14	
10 ≤ X < 30 ±0.25		UNIT		O		EDN-206		4-12-13	
30 ≤ X ±0.3		mm		NO.		EDN/DCN		DATE	
ANGLE / 角度 ±3°		SCALE		DATE		ISSUE		CHECKED	
		NTS		4-12-13		APPROVED		Y. OKABE	
DRAWN H. TAMAI		DESIGNED H. TAMAI		CHECKED		PART NO. / 型番		25 6411 067 101 894 E	
						DWG NO. / 図番		BJS 6411094	
								SHEET/REV 1/2 A	

KYOCERA



KYOCERA Corporation


SHEET/REV

1/2 A

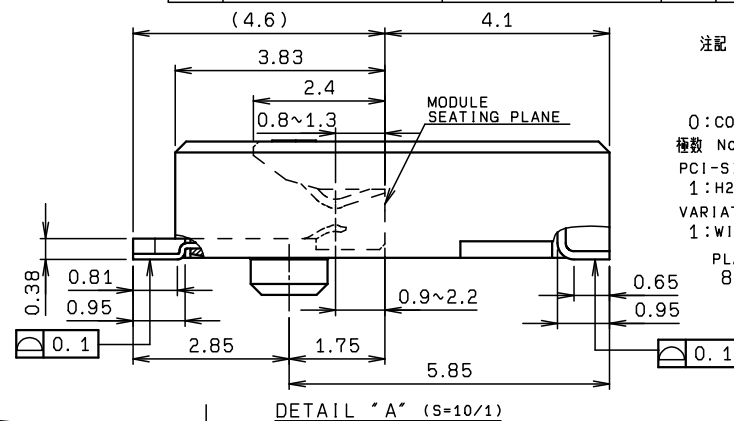

KEYING —
E: KEY E

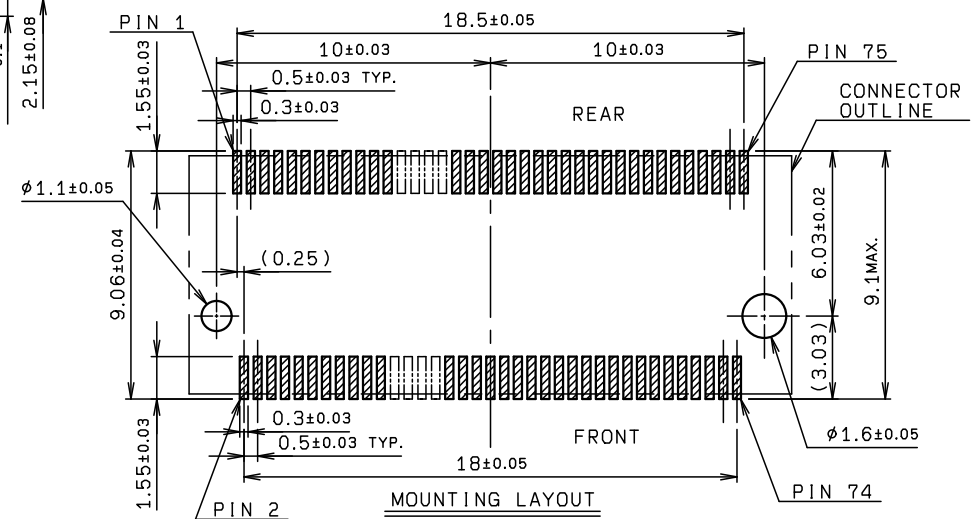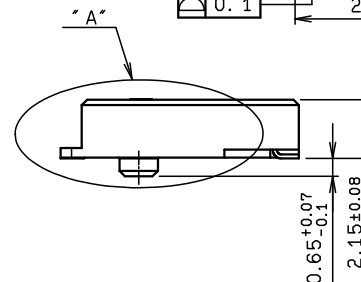

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ $30 \leq X$		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/2			
± 0.2 ± 0.25 ± 0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 $\pm 3^\circ$		SCALE NTS		DATE 8-01-12		PART NAME / 品名 SERIES 6411 ASSY RA SMT M.2 CONNECTOR H2.3 KEY E			
DRAWN H. TAMAI		DESIGNED H. TAMAI		CHECKED 		APPROVED Y. OKABE		PART NO. / 型番 20 6411 067 101 894 E	
 KYOCERA Corporation				DWG NO. / 図番 BJS 6411094				SHEET/REV 2/2 A	