
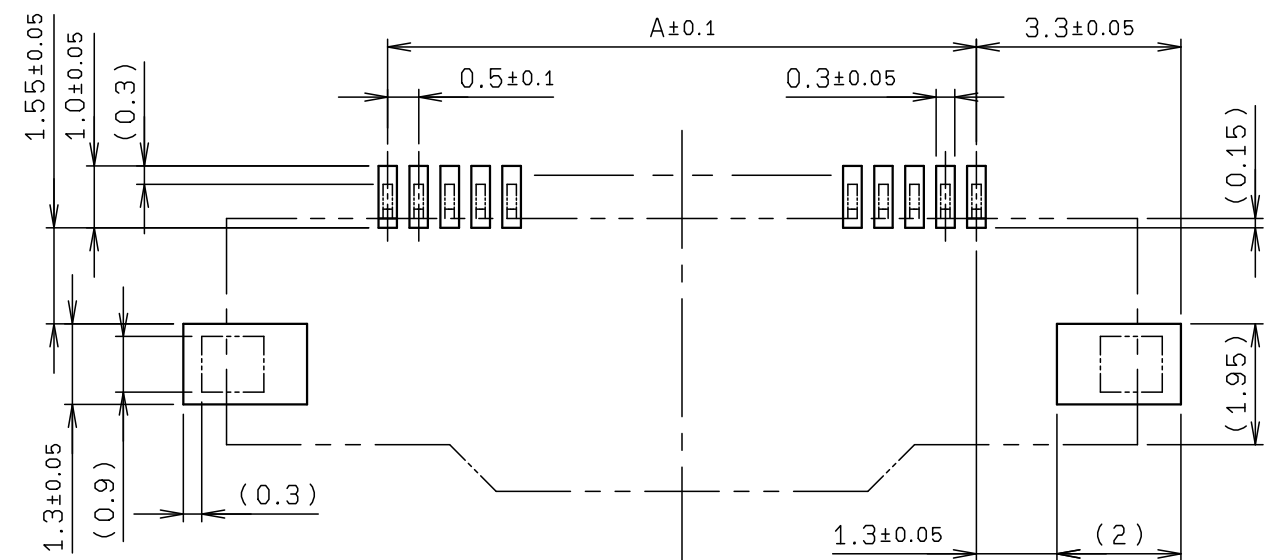
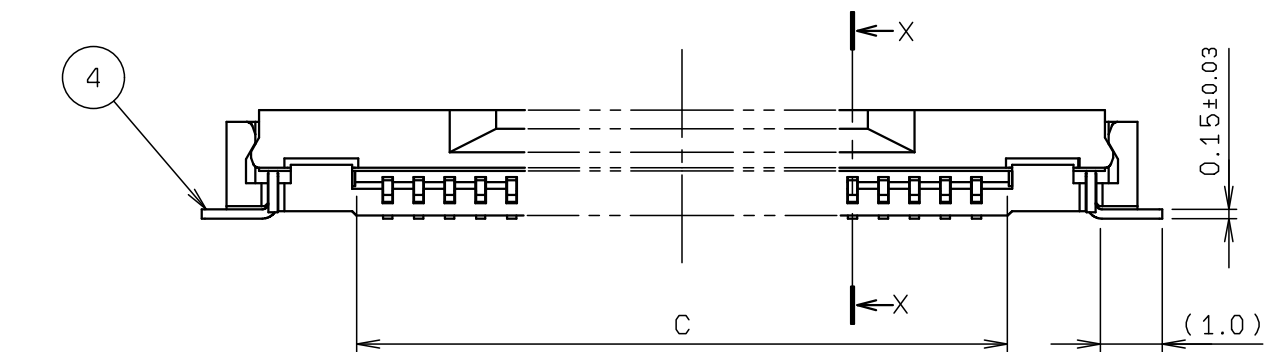



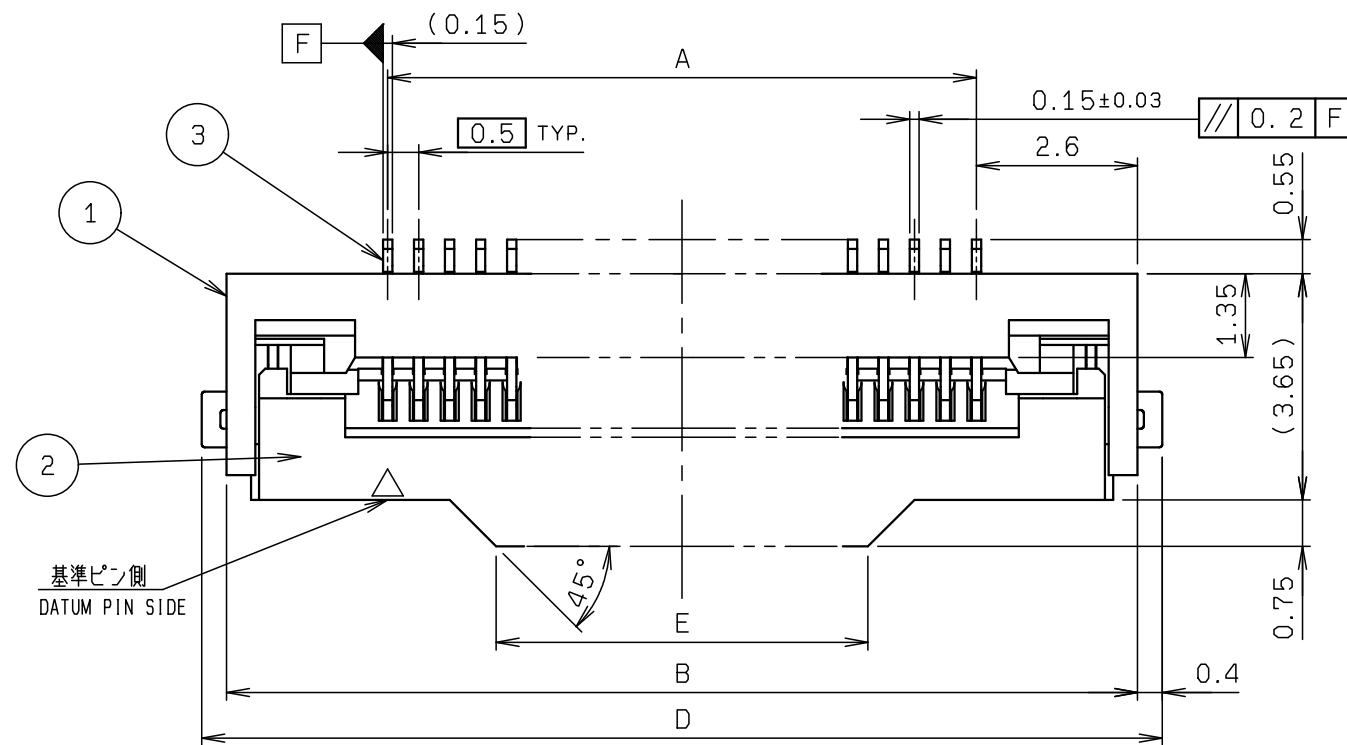


基板取付寸法

MOUNTING LAYOUT

RoHS規制対応
COMPLIANT WITH
RoHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.15 Au PLATING
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0.15 Sn-Cu PLATING

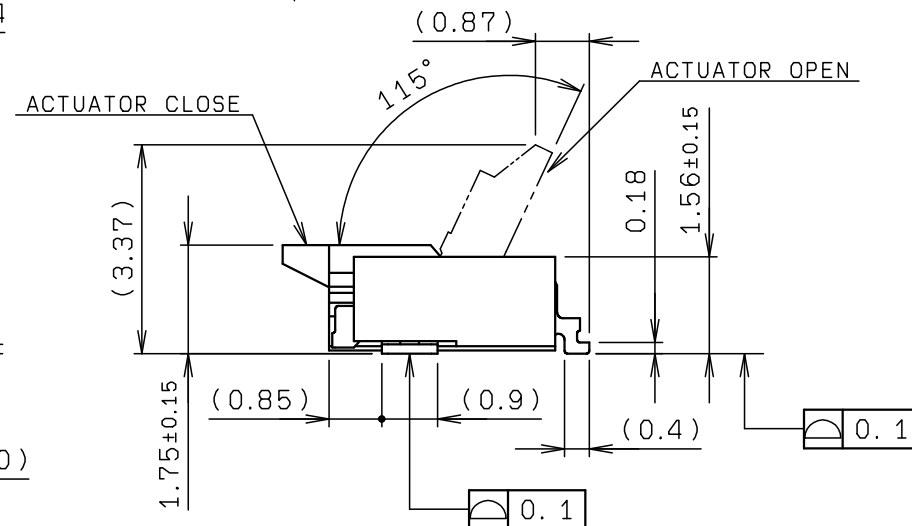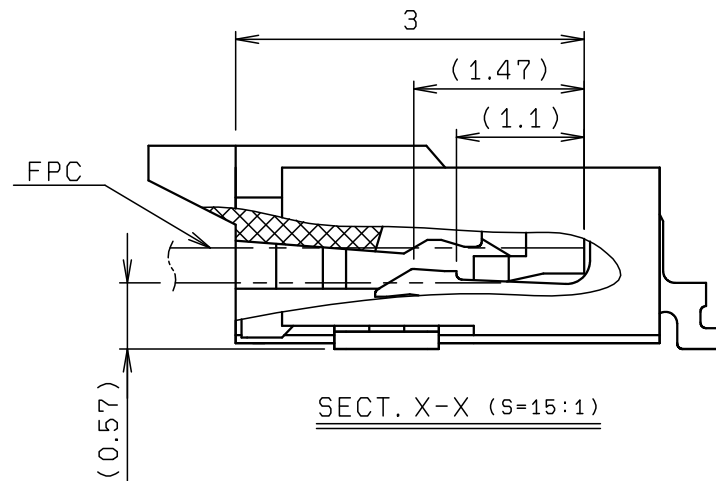


極 数 NO. OF POS.	A	B	C	D	E
8	3. 5	8. 7	4. 55	9. 5	2. 85
10	4. 5	9. 7	5. 55	10. 5	3. 85
12	5. 5	10. 7	6. 55	11. 5	4. 85
14	6. 5	11. 7	7. 55	12. 5	5. 85
20	9. 5	14. 7	10. 55	15. 5	6. 0
21	10. 0	15. 2	11. 05	16. 0	6. 5
26	12. 5	17. 7	13. 55	18. 5	9. 0
30	14. 5	19. 7	15. 55	20. 5	11. 0
35	17. 0	22. 2	18. 05	23. 0	13. 5
40	19. 5	24. 7	20. 55	25. 5	16. 0
41	20. 0	25. 2	21. 05	26. 0	16. 5
45	22. 0	27. 2	23. 05	28. 0	18. 5
50	24. 5	29. 7	25. 55	30. 5	21. 0
51	25. 0	30. 2	26. 05	31. 0	21. 5
60	29. 5	34. 7	30. 55	35. 5	26. 0
64	31. 5	36. 7	32. 55	37. 5	28. 0
68	33. 5	38. 7	34. 55	39. 5	30. 0
70	34. 5	39. 7	35. 55	40. 5	31. 0
74	36. 5	41. 7	37. 55	42. 5	33. 0
80	39. 5	44. 7	40. 55	45. 5	36. 0

※この表は1，2ページ目にのみ適用

※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ $30 \leq X$ ± 0.2 ± 0.25 ± 0.3		UNIT mm		ANGLE 3RD		O EDN20016		2020/01/23	
ANGLE / 角度 $\pm 3^\circ$		SCALE NTS		DATE 2020/01/23		NO. EDN/DCN		DATE	
						ISSUE		CHECKED	
						APPROVED			
DRAWN M. TAKAHASHI		DESIGNED A. MURATA		CHECKED N. KITAGAWA		APPROVED Y. FUJII		PART NAME / 品名 FPC ASSY RA SMT 0.5mm PITCH ZIF TYPE BOTTOM CONTACT	
								PART NO. / 型番 04 6806 0XX 000 846 + T	
								DWG NO. / 図番 BJS 6806047	
								SHEET/REV 1/3 0	


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

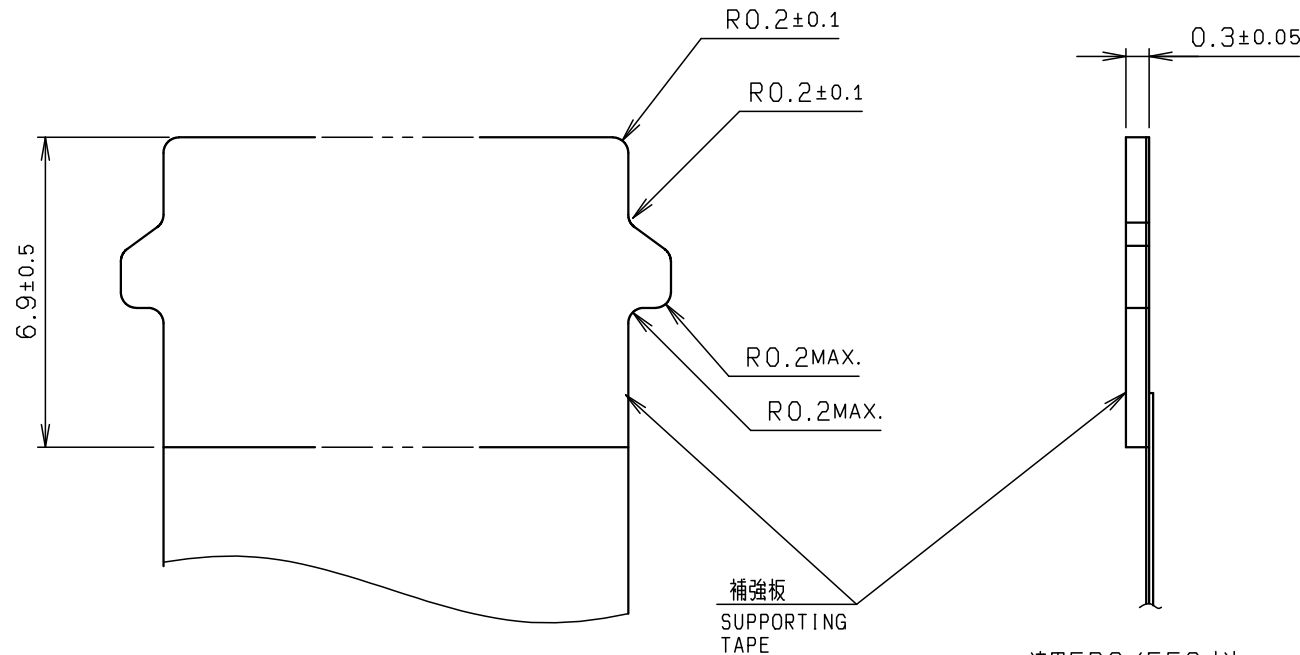

(推奨仕様)

FPC構成
FPC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT: 3±2μm Au: 0.06±0.03μm

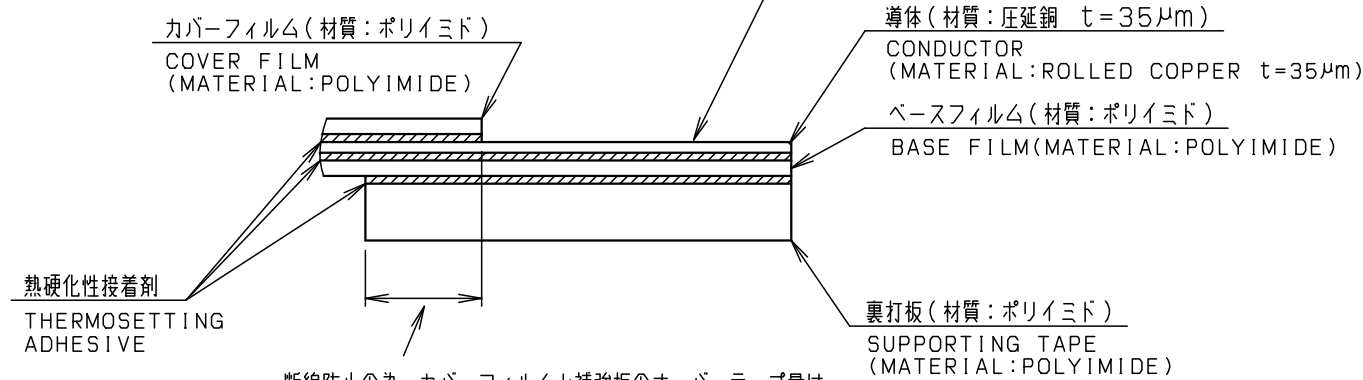

断線防止の為、カバーフィルムと補強板のオーバーラップ量は、1mm以上とる事を推奨します。
IN ORDER TO PREVENT OPEN CIRCUIT, 1mm OR MORE OF THE COVER FILM AND THE SUPPORTING PLATE SHALL BE OVERLAPPED.


注 記
NOTE

1. コンタクトテール及び固定金具は、基板より最大浮き0.1mmとする。
FLOATING FROM BOARD OF CONTACT TAIL AND ANCHOR PLATE SHALL BE 0.1mmMAX.
2. Nは、極数を示す。
N MEANS NUMBER OF PINS.

※この注記は1, 2ページ目にのみ適用

※THIS NOTES IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

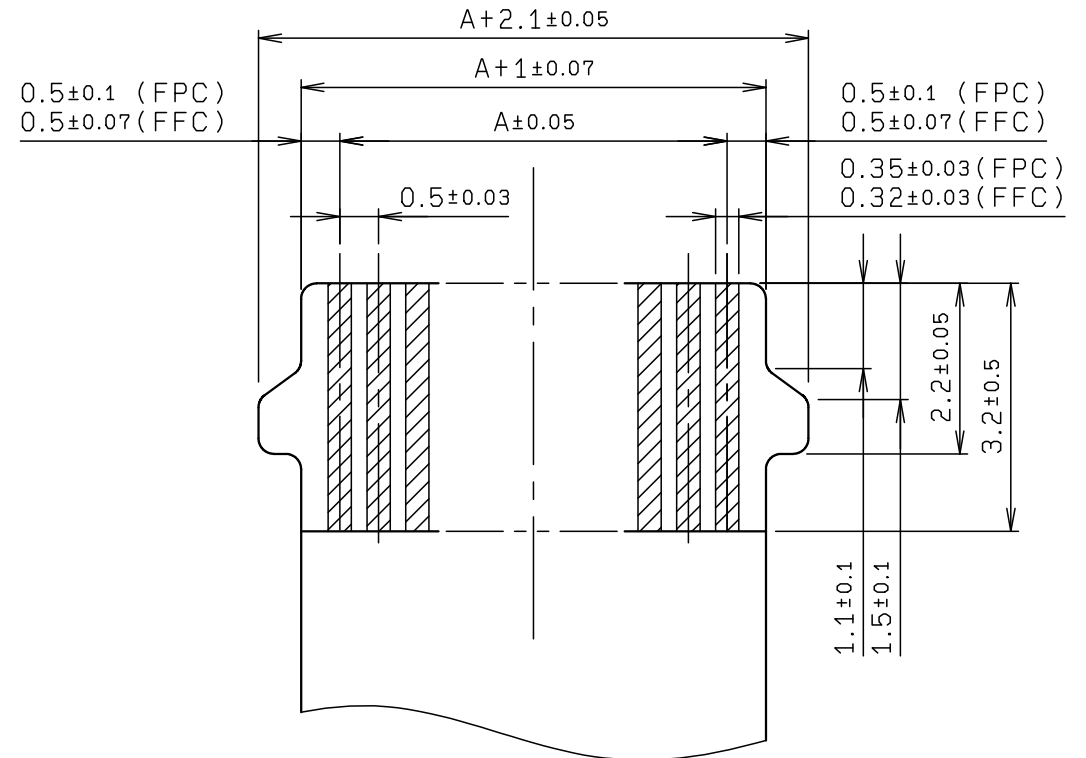

(推奨仕様)





FFC構成
FFC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT: 0.5μmMIN. Au: 0.05μmMIN.

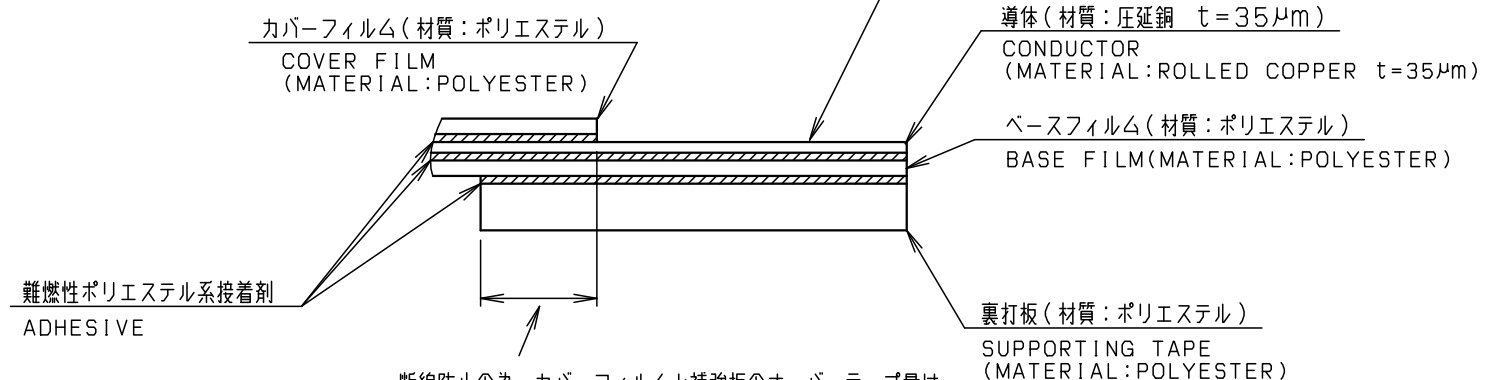

断線防止の為、カバーフィルムと補強板のオーバーラップ量は、1mm以上とる事を推奨します。
IN ORDER TO PREVENT OPEN CIRCUIT, 1mm OR MORE OF THE COVER FILM AND THE SUPPORTING PLATE SHALL BE OVERLAPPED.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3			
10 ≤ X < 30 ±0.25		SCALE NTS		DATE 2020/01/23		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		ANGLE / 角度 ±3°		PART NAME / 品名		FPC ASSY RA SMT		0.5mm PITCH ZIF TYPE BOTTOM CONTACT	
DRAWN M. TAKAHASHI	DESIGNED A. MURATA	CHECKED N. KITAGAWA	APPROVED Y. FUJII	PART NO. / 型番		04 6806 0XX 000 846 + T		DWG NO. / 図番	
						BJS 6806047		SHEET/REV	
								12/3 0	

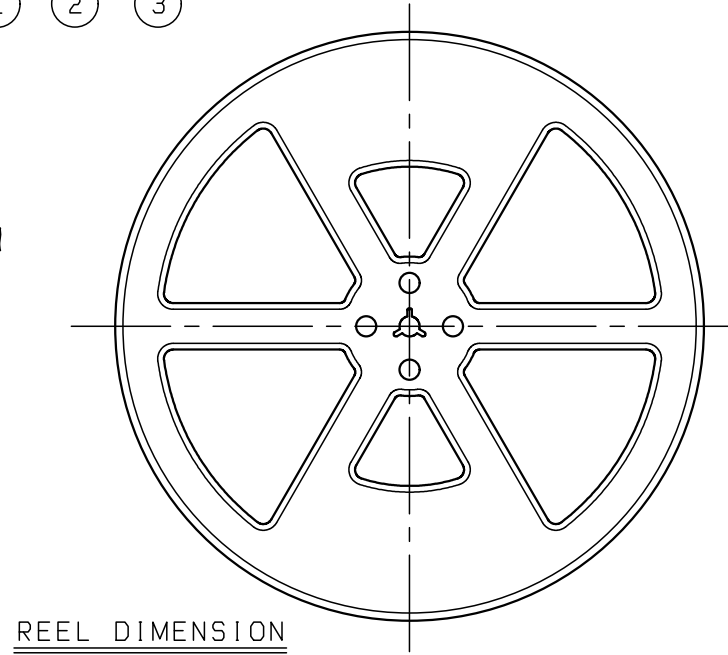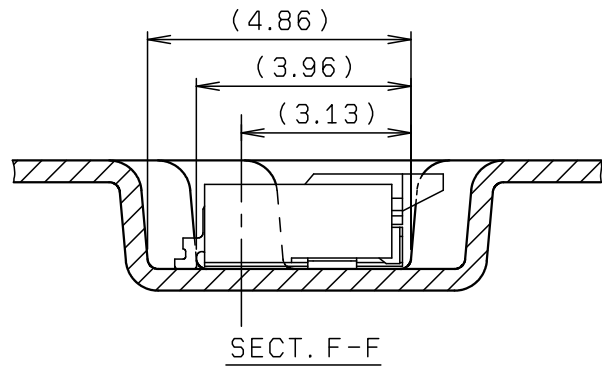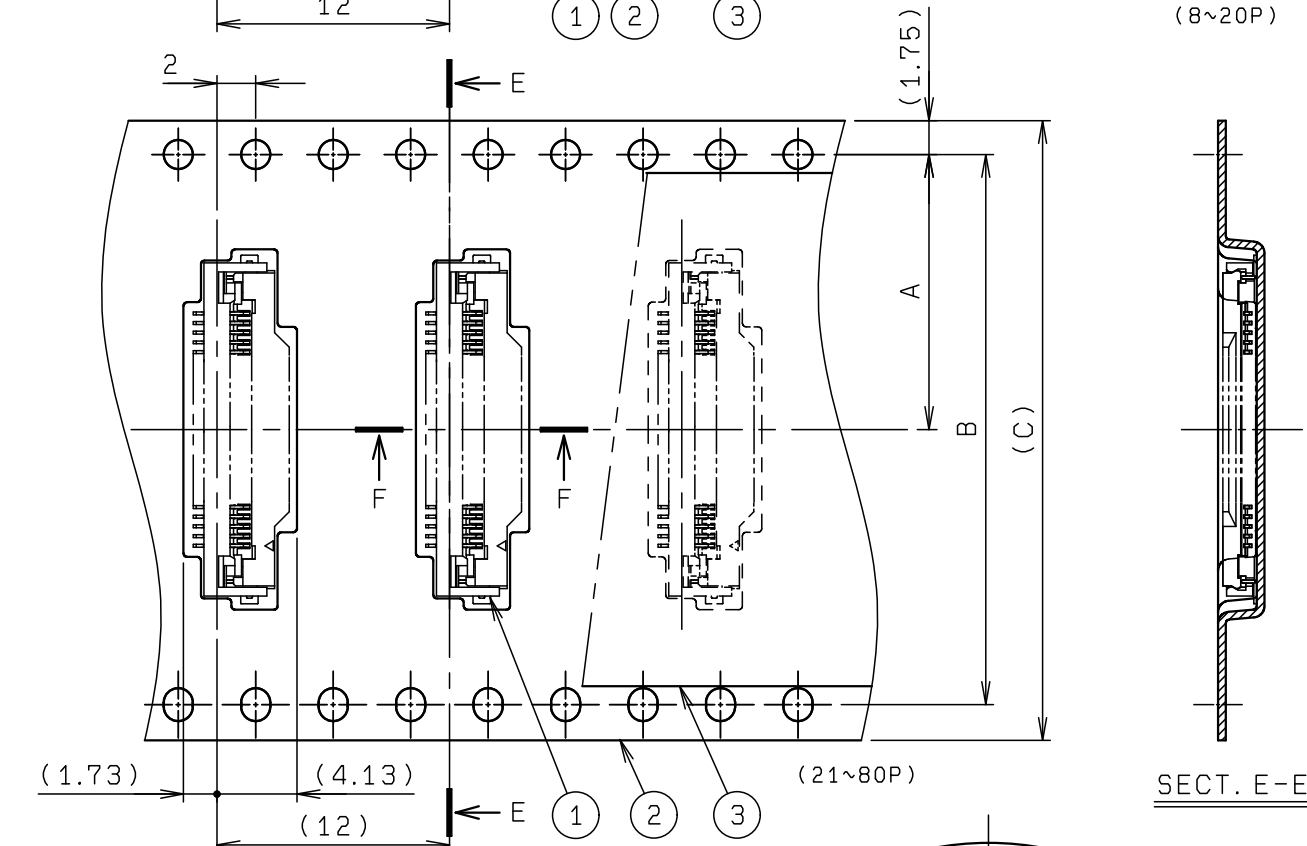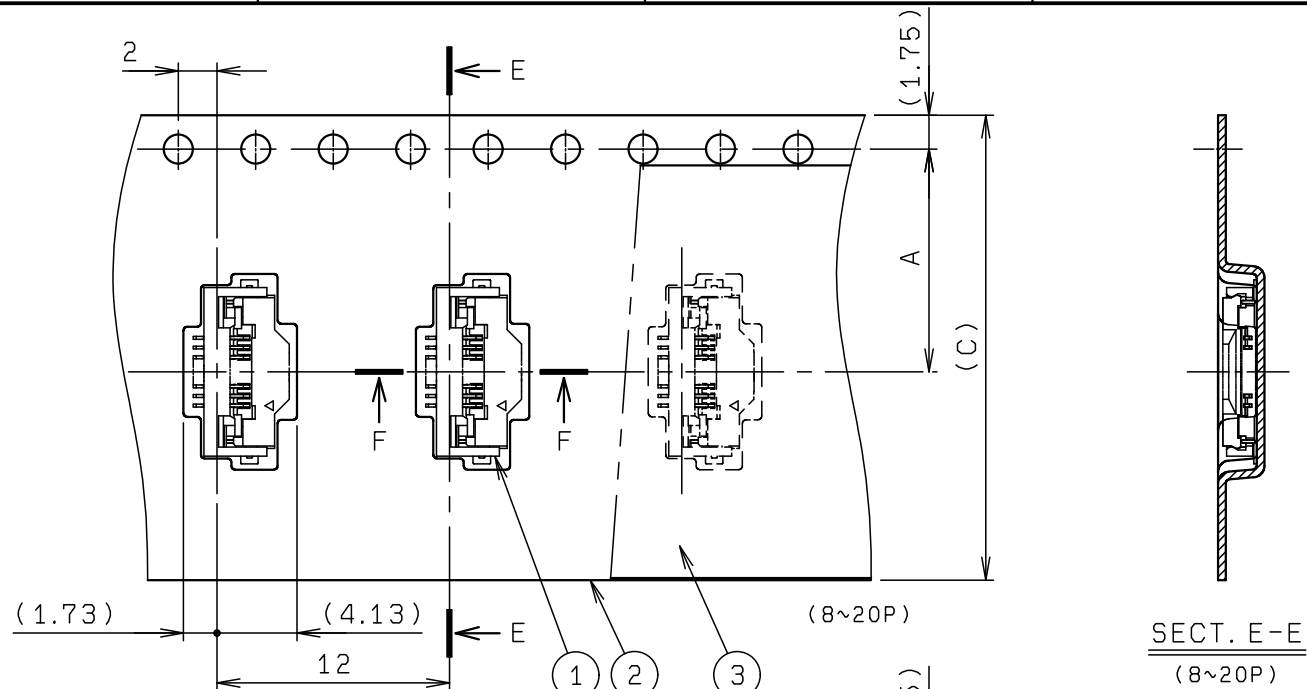


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6806 0XX 000 846 + T	3000			00 6806 0XX 000 846 +T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 3000 個/リール
PACKING QUANTITY : 3000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

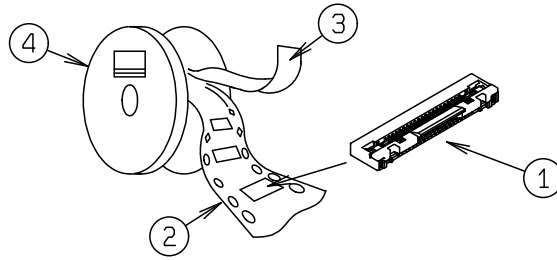

- 引出し方向
USER DIRECTION OF FEED

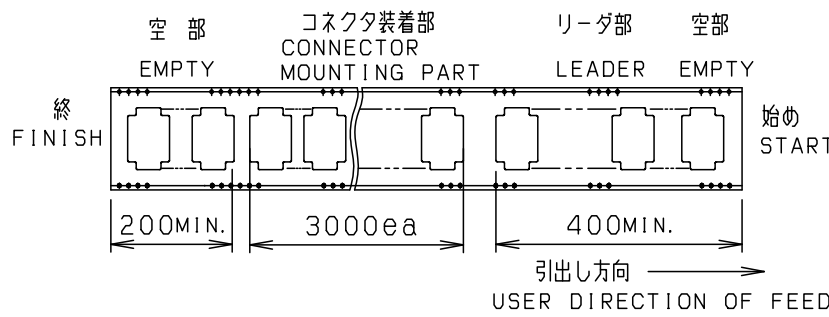

- 型番
P/N 04 6806 0XX 000 846 + T

極数
NO. OF POS.

めっきコード
PLATING CODE

846 + :AU SELECTIVE
(ANCHOR PLATE : SU-CU)

※この注記の1~3は3ページ目にはみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極数 NO. OF POS.	A	B	C	D
8	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
20	11.5	—	24.0	30.4
21	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
35	20.2	38.5	44.0	50.4
40	20.2	38.5	44.0	50.4
41	20.2	38.5	44.0	50.4
45	20.2	38.5	44.0	50.4
50	20.2	38.5	44.0	50.4
51	20.2	38.5	44.0	50.4
60	26.2	50.5	56.0	62.4
64	26.2	50.5	56.0	62.4
68	26.2	50.5	56.0	62.4
70	26.2	50.5	56.0	62.4
74	26.2	50.5	56.0	62.4
80	26.2	50.5	56.0	62.4

※この表は3ページ目にはみ適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格			
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm ANGLE 3RD		REFER TO SHEET 1/3	
ANGLE / 角度 ±3°		SCALE NTS DATE 2020/01/23		NO. EDN/DCN DATE ISSUE CHECKED APPROVED	
DRAWN M. TAKAHASHI DESIGNED A. MURATA CHECKED N. KITAGAWA APPROVED Y. FUJII		PART NAME / 品名 SERIES 6806 EMBOSS TAPE ASSY RA SMT 0.5mm PITCH ZIF BOTTOM CONTACT TYPE		PART NO. / 型番 04 6806 0XX 000 846 + T	
		DWG NO. / 図番 BJS 6806047		SHEET REV 13/3 0	

