

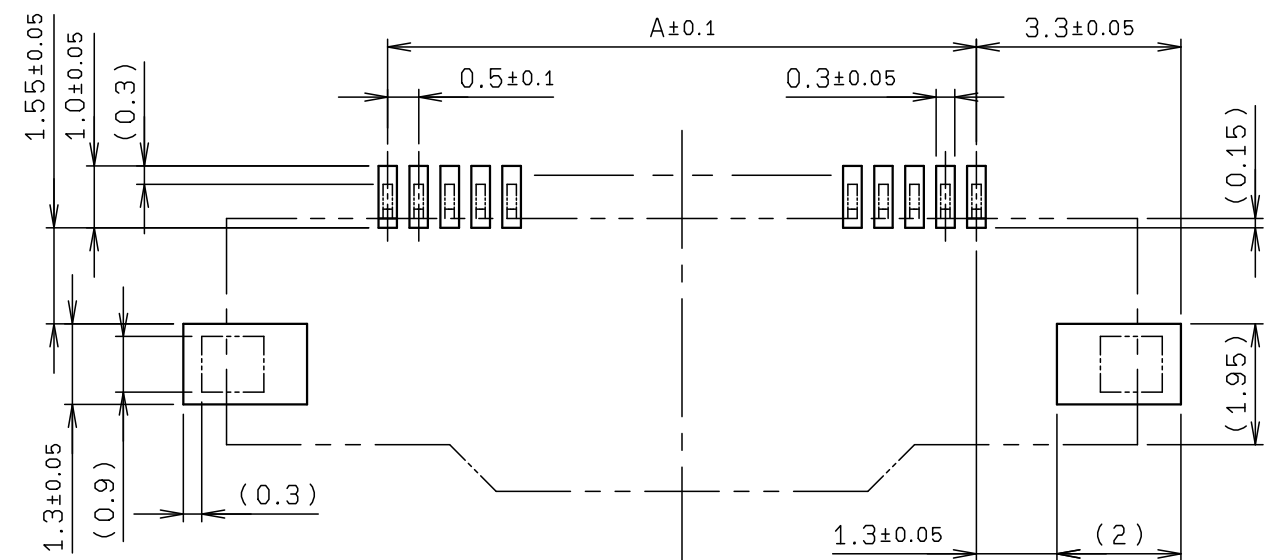
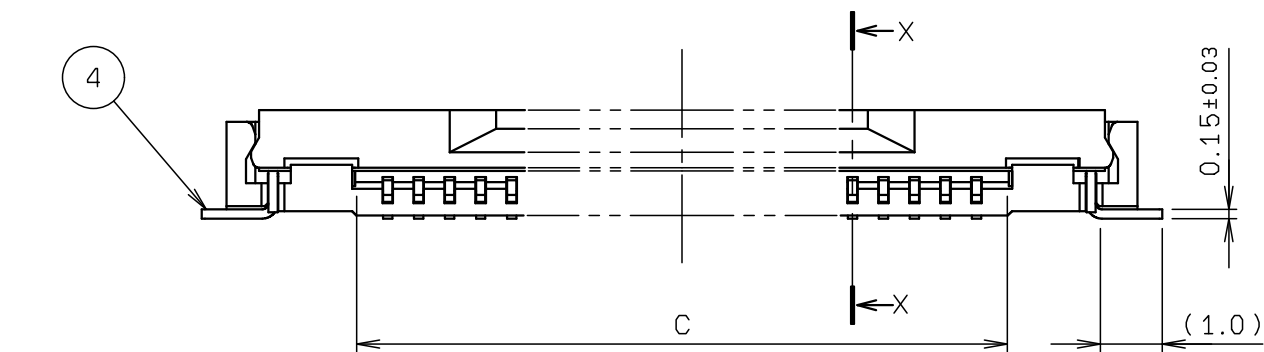
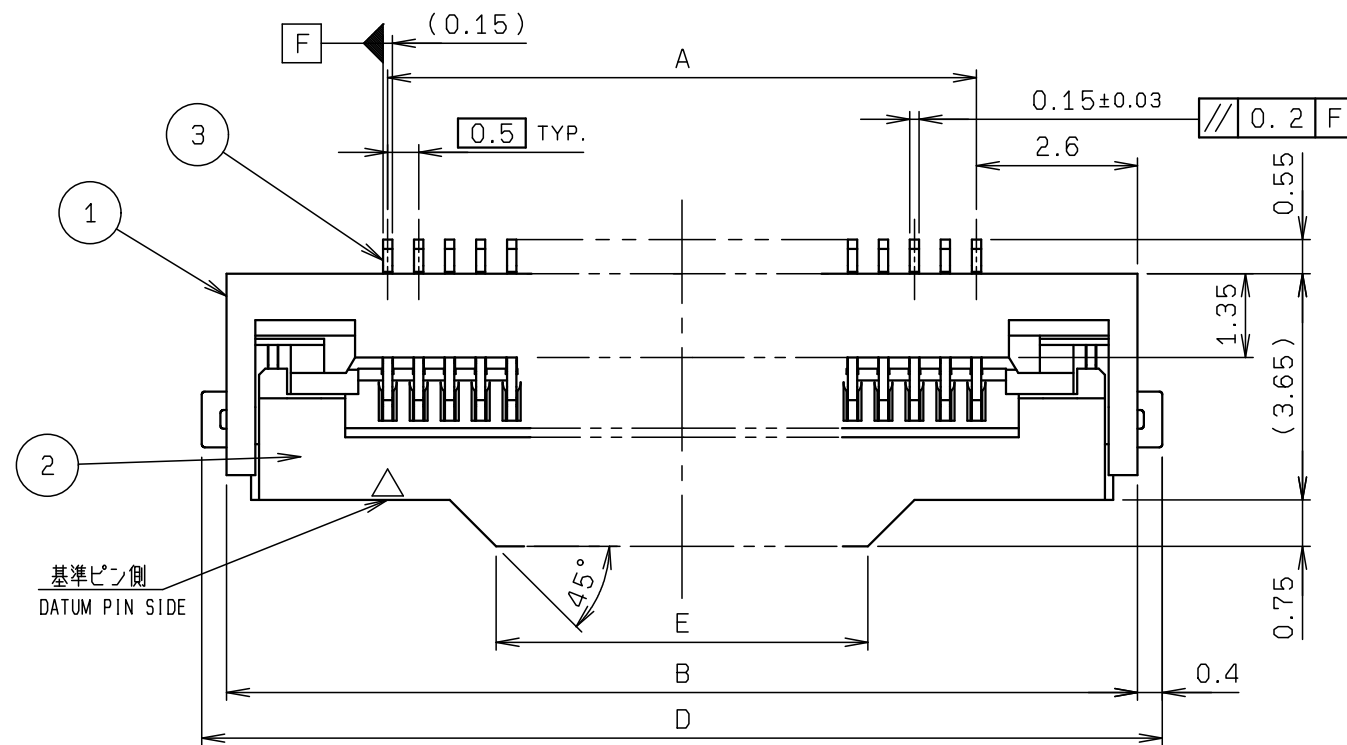


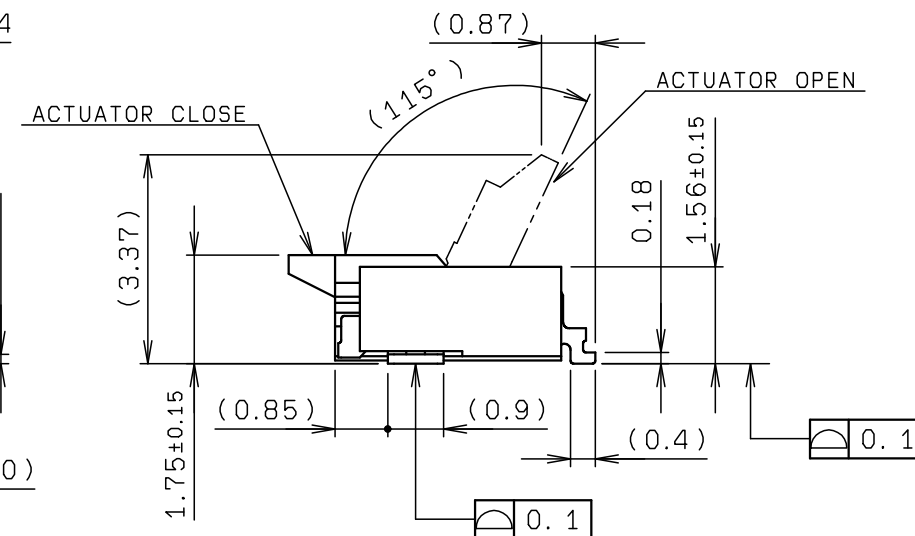

基板取付寸法

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR:WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR:BLACK UL94V-0
3	CONTACT		N	COPPER ALLOY		t=0.15 Au PLATING
4	ANCHOR PLATE		2	COPPER ALLOY		t=0.15 Sn-Cu PLATING

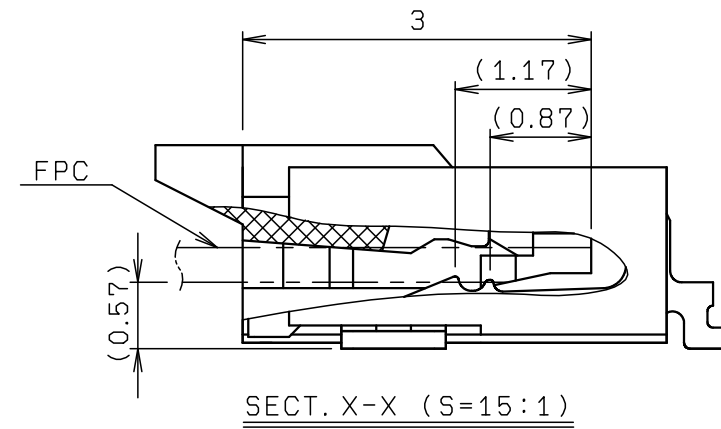



極 数 NO. OF POS.	A	B	C	D	E
8	3. 5	8. 7	4. 55	9. 5	2. 85
10	4. 5	9. 7	5. 55	10. 5	3. 85
12	5. 5	10. 7	6. 55	11. 5	4. 85
14	6. 5	11. 7	7. 55	12. 5	5. 85
20	9. 5	14. 7	10. 55	15. 5	6. 0
21	10. 0	15. 2	11. 05	16. 0	6. 5
26	12. 5	17. 7	13. 55	18. 5	9. 0
30	14. 5	19. 7	15. 55	20. 5	11. 0
35	17. 0	22. 2	18. 05	23. 0	13. 5
40	19. 5	24. 7	20. 55	25. 5	16. 0
45	22. 0	27. 2	23. 05	28. 0	18. 5
50	24. 5	29. 7	25. 55	30. 5	21. 0
60	29. 5	34. 7	30. 55	35. 5	26. 0
68	33. 5	38. 7	34. 55	39. 5	30. 0
70	34. 5	39. 7	35. 55	40. 5	31. 0
74	36. 5	41. 7	37. 55	42. 5	33. 0
80	39. 5	44. 7	40. 55	45. 5	36. 0

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
$10 \leq X < 30$ $30 \leq X$		± 0.2 ± 0.25 ± 0.3		UNIT	ANGLE		O	EDN24071	2024/03/21
				mm	3RD		NO.	EDN/DCN	DATE
ANGLE / 角度		SCALE		DATE		PART NAME / 品名			
$\pm 3^\circ$		NTS		2024/03/21		FPC ASSY RA SMT			
						0.5mm PITCH ZIF TYPE BOTTOM CONTACT			
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
M. TAKAHASHI	Y. TSURUOKA		N. NAKAJIMA	04 6806 0XX 160 846 + T					
				DWG NO. / 図番				SHEET/REV	
				BJS 6806061				1/3 0	

© 2024 KYOCERA Corporation


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

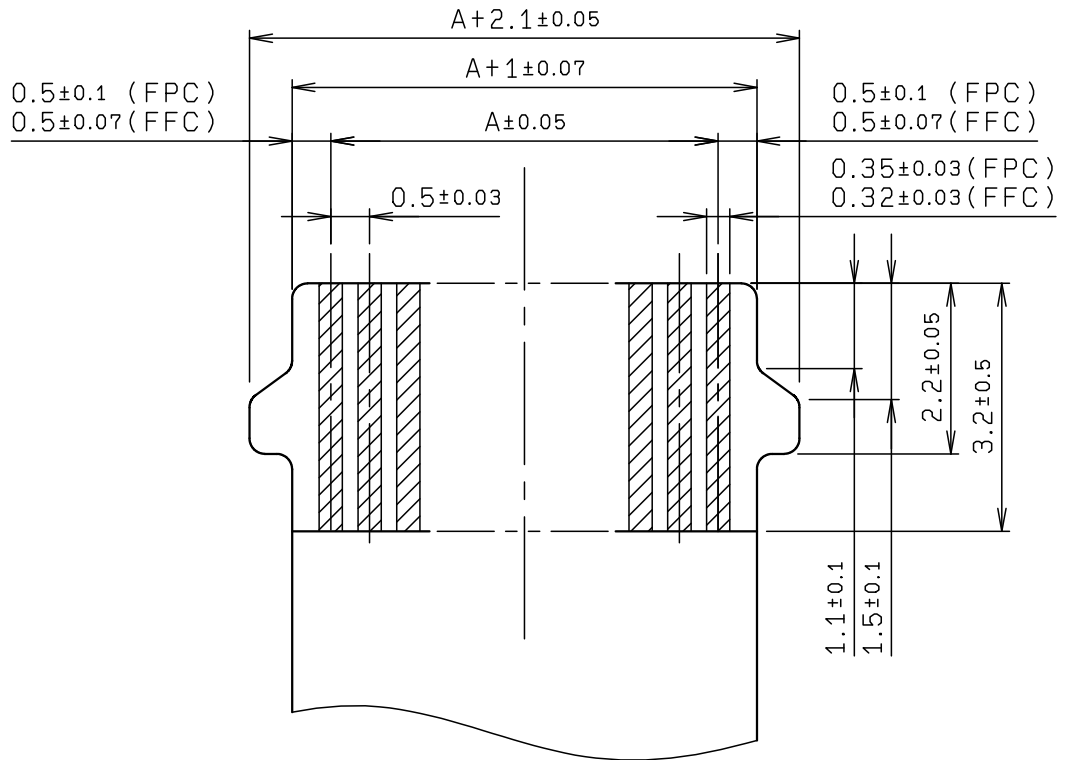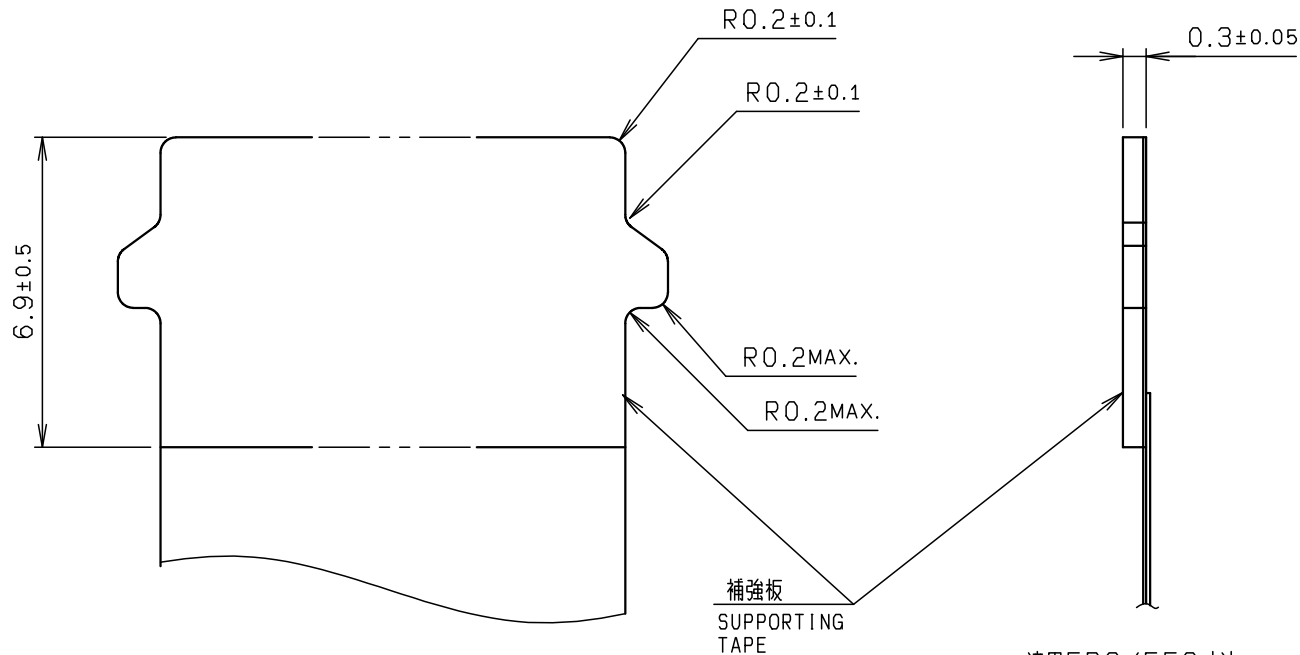

(推奨仕様)

FPC構成
FPC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT: 3±2μm Au: 0.06±0.03μm

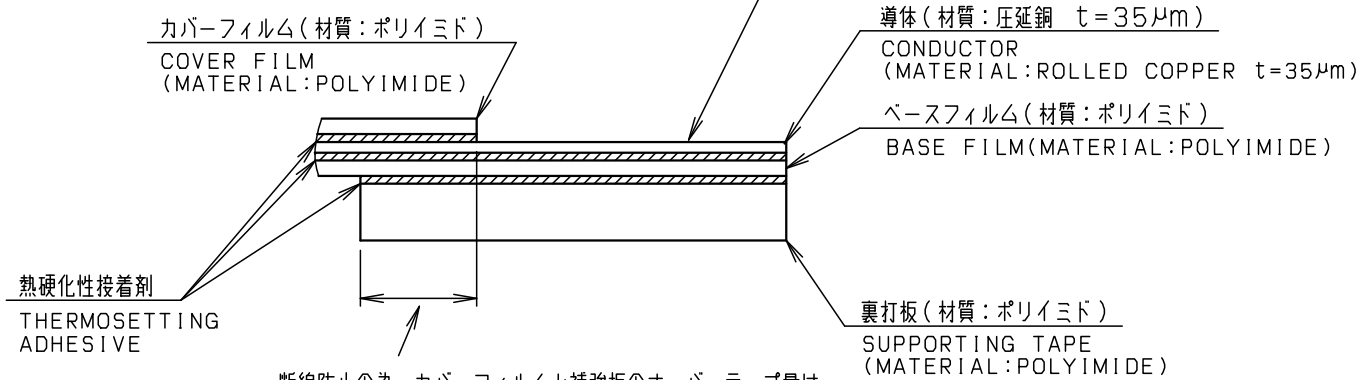

断線防止の為、カバーフィルムと補強板のオーバーラップ量は、1mm以上とる事を推奨します。
IN ORDER TO PREVENT OPEN CIRCUIT, 1mm OR MORE OF THE COVER FILM AND THE SUPPORTING PLATE SHALL BE OVERLAPPED.

注 記
NOTE

1. コンタクトテール及び固定金具は、基板より最大浮き0.1mmとする。
FLOATING FROM BOARD OF CONTACT TAIL AND ANCHOR PLATE SHALL BE 0.1mmMAX.
2. Nは、極数を示す。
N MEANS NUMBER OF PINS.


※この注記は1, 2ページ目におのみ適用

※THIS NOTE IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

(推奨仕様)

FFC構成
FFC STRUCTURE


表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT: 0.5μmMIN. Au: 0.05μmMIN.

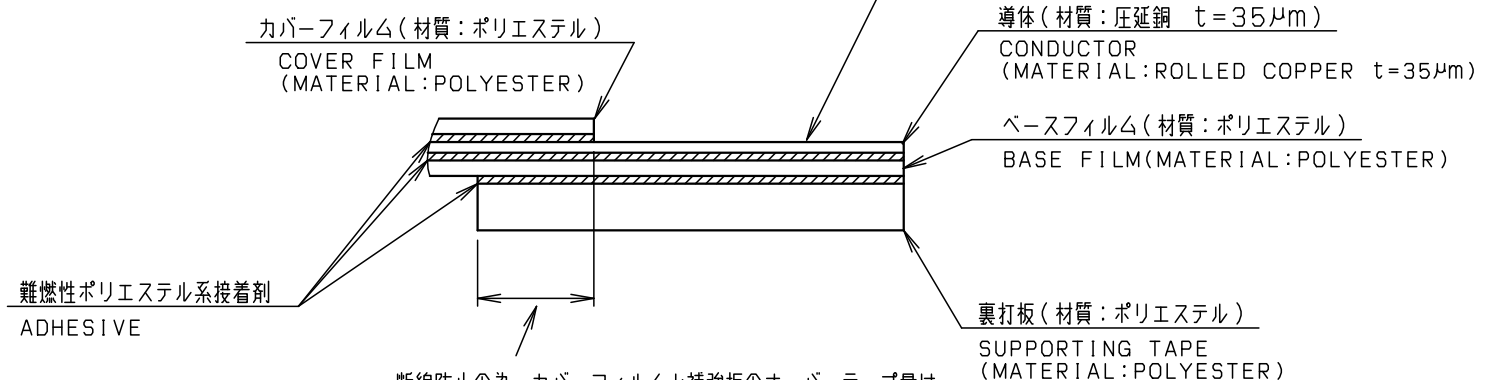



断線防止の為、カバーフィルムと補強板のオーバーラップ量は、1mm以上とる事を推奨します。
IN ORDER TO PREVENT OPEN CIRCUIT, 1mm OR MORE OF THE COVER FILM AND THE SUPPORTING PLATE SHALL BE OVERLAPPED.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格									
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3											
	UNIT		ANGLE		REFER TO SHEET		1/3				
	mm		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
	SCALE		DATE		PART NAME / 品名						
ANGLE / 角度		NTS		2024/03/21		FPC ASSY RA SMT				0.5mm PITCH ZIF TYPE BOTTOM CONTACT	
±3°											
DRAWN	DESIGNED	CHECKED	APPROVED		PART NO. / 型番						
M. TAKAHASHI	Y. TSURUOKA		N. NAKAJIMA		04 6806 0XX 160 846 + T						
				DWG NO. / 図番					SHEET / REV		
				BJS 6806061					12/3 0		



KYOCERA

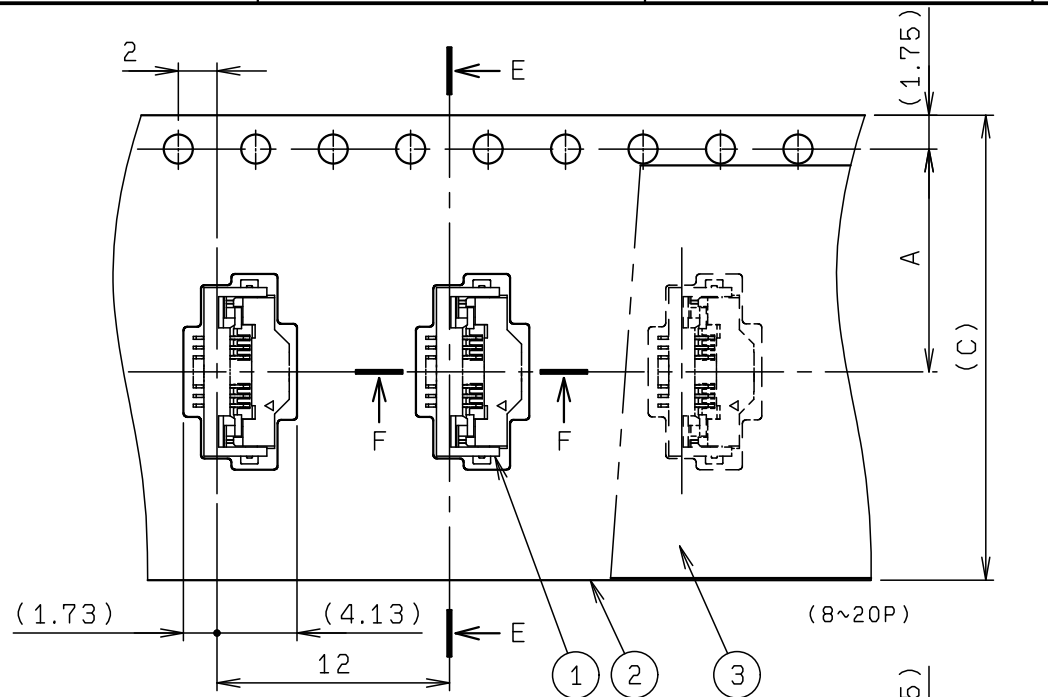


SECT. E-E
(8~20P)

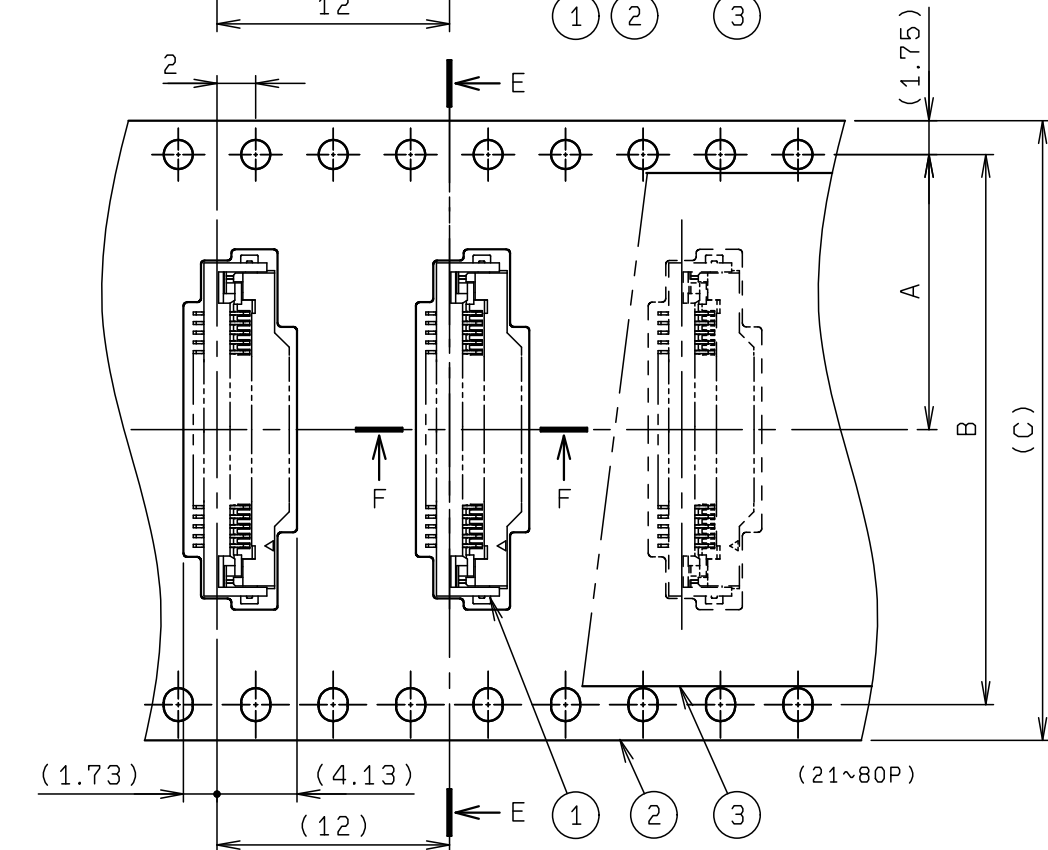


SECT. E-E

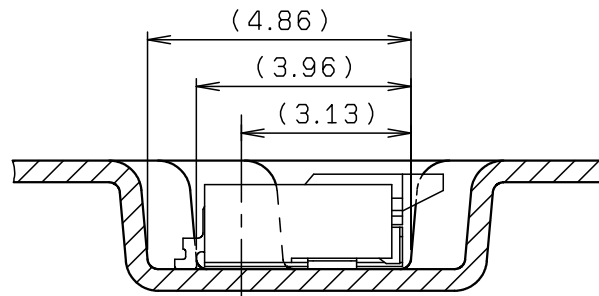

SECT. F-F

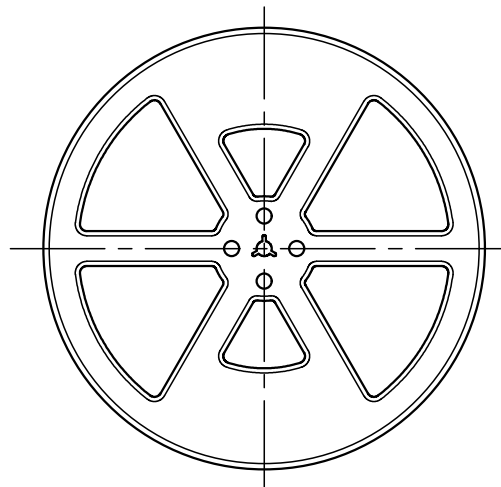

REEL DIMENSION

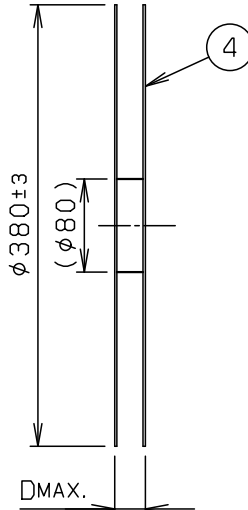


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6806 0XX 160 846 + T	3000			00 6806 0XX 160 846 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 3000 個/リール
PACKING QUANTITY : 3000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

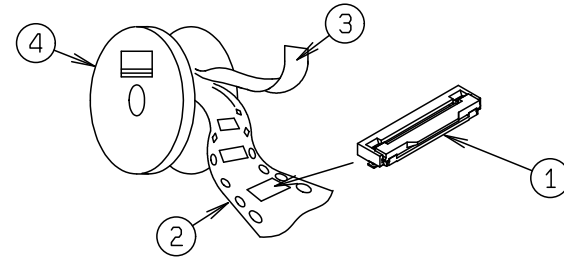

- 引出し方向
USER DIRECTION OF FEED

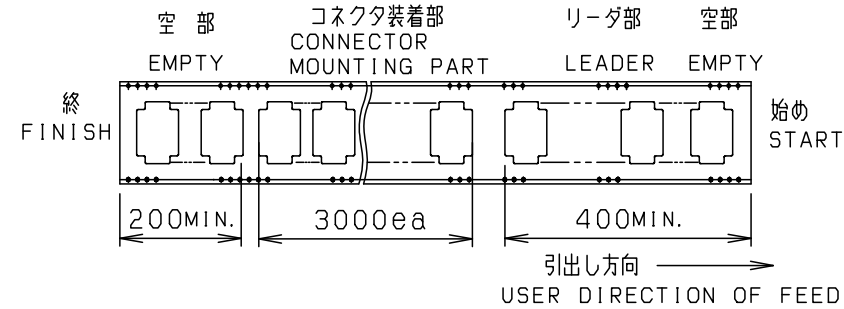

- 型番
P/N 04 6806 0XX 160 846 + T

極数
NO. OF POS.

めっきコード
PLATING CODE

846 + :AU SELECTIVE
(ANCHOR PLATE:SU-CU)

※この注記の1~3は3ページ目にはみ適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極数 NO. OF POS.	A	B	C	D
8	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
20	11.5	—	24.0	30.4
21	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
35	20.2	38.5	44.0	50.4
40	20.2	38.5	44.0	50.4
45	20.2	38.5	44.0	50.4
50	20.2	38.5	44.0	50.4
60	26.2	50.5	56.0	62.4
68	26.2	50.5	56.0	62.4
70	26.2	50.5	56.0	62.4
74	26.2	50.5	56.0	62.4
80	26.2	50.5	56.0	62.4

※この表は3ページ目にはみ適用

※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格			
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm ANGLE 3RD		REFER TO SHEET 1/3	
ANGLE / 角度 ±3°		SCALE NTS DATE 2024/03/21		NO. EDN/DCN DATE ISSUE CHECKED APPROVED	
DRAWN M. TAKAHASHI DESIGNED Y. TSURUOKA		CHECKED APPROVED N. NAKAJIMA		PART NAME / 品名 SERIES 6806 EMBOSS TAPE ASSY RA SMT 0.5mm PITCH ZIF BOTTOM CONTACT TYPE	
				PART NO. / 型番 04 6806 0XX 160 846 + T	
				DWG NO. / 図番 BJS 6806061	
				SHEET REV 13/3 0	

KYOCERA