

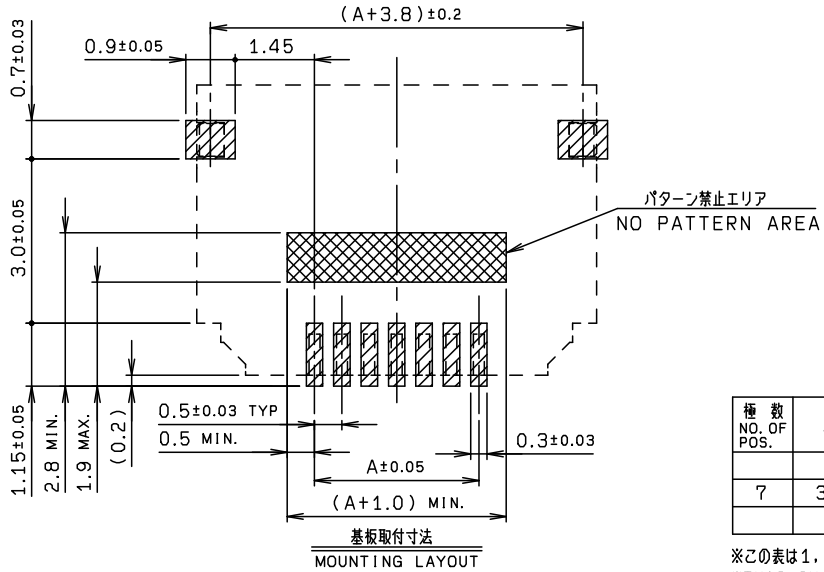


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	COPPER ALLOY		t=0.2 Au
4	ANCHOR PLATE		2	COPPER ALLOY		t=0.15 Sn-Cu(1μm~7μm)

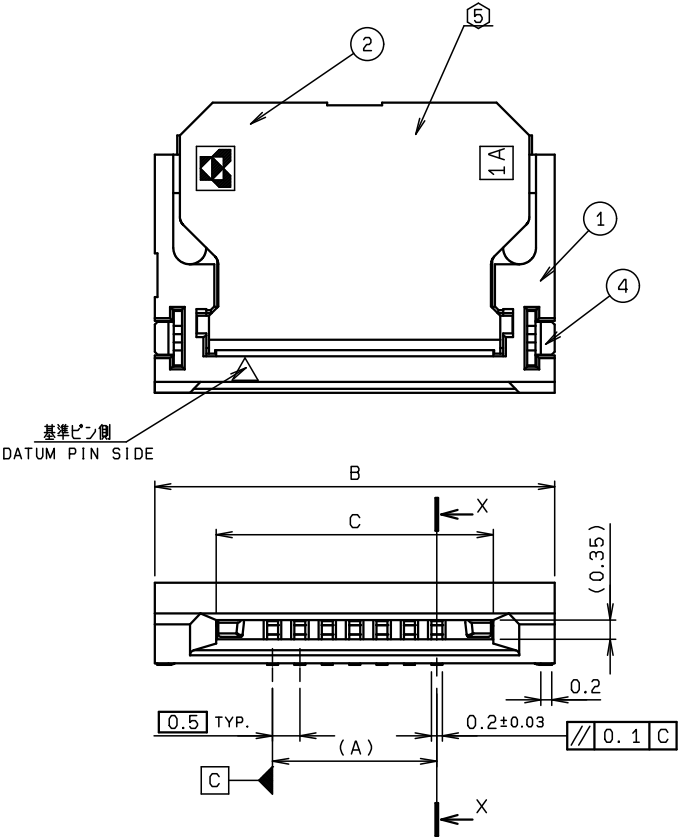



極数 NO. OF POS.	A	B	C
7	3.0	7.3	5.06

※この表は1, 2ページ目にお適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

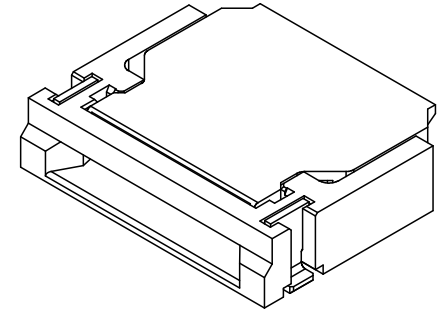


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3				A	DCN-111	1-29-15	N. NAKAJIMA		Y. FUJII
				0	EDN-050	2-06-14	N. NAKAJIMA		Y. FUJII
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		UNIT mm		ANGLE 3RD		PART NAME / 品名 PFC ASSY RA SMT 0.5mm PITCH ZIF TYPE UPPER CONTACT			
		SCALE 10: 1		DATE 2-06-14					
DRAWN N. NAKAJIMA		DESIGNED N. NAKAJIMA		CHECKED Y. FUJII		APPROVED Y. FUJII		PART NO. / 型番 04 6808 6XX 000 846 +	
DWG NO. / 図番 BJS 6808002						SHEET/REV 1/3 A			

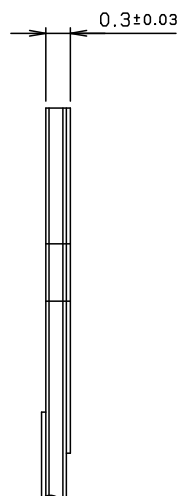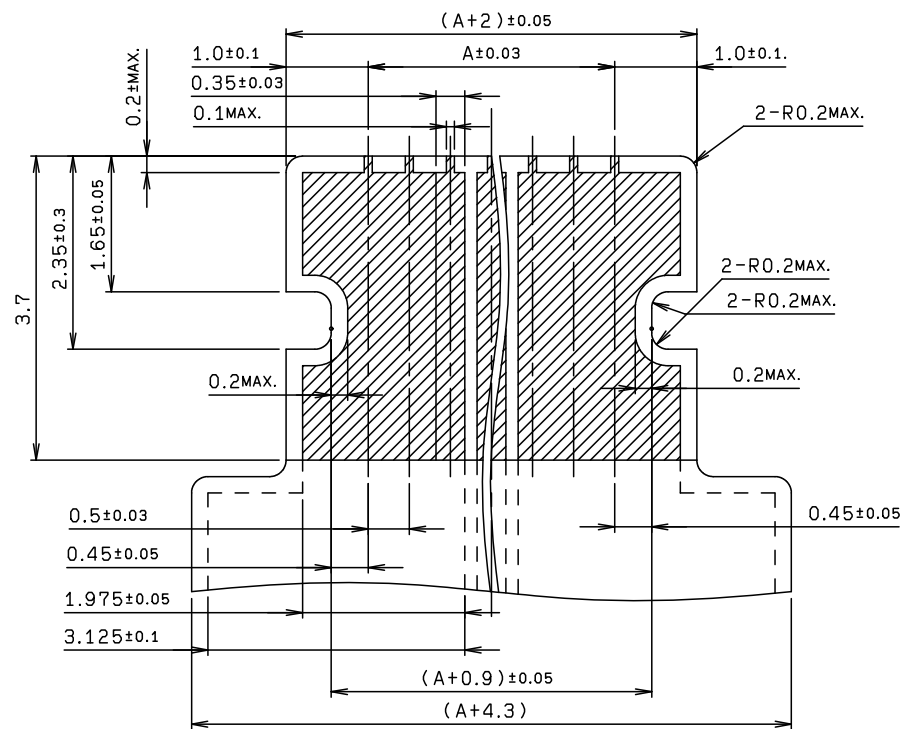


適用FPC寸法
APPLICABLE FPC

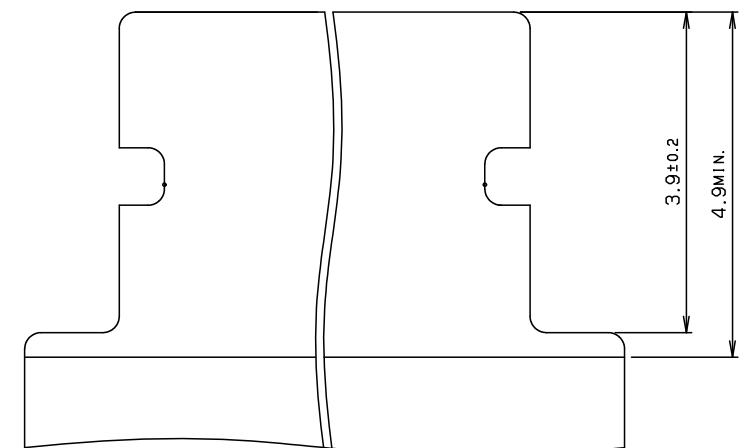

注 記
NOTE

1. コンタクトテール及び固定金具は、基板より最大浮き0.08mmとする。
FLOATING FROM BOARD OF CONTACT TAIL AND ANCHOR PLATE
SHALL BE 0.08mmMAX.

2. 推奨FPC構成
RECOMMENDED FPC STRUCTURE

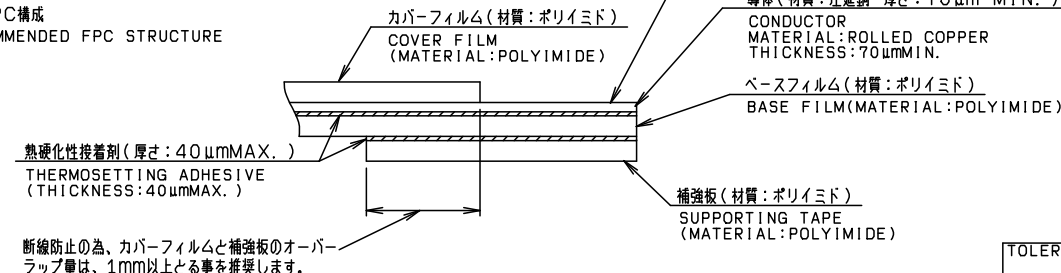

3. Nは、極数を示す。
N:NUMBER OF CONTACTS

4. アクチュエーター開放状態での実装禁止。
THE BAN ON MOUNTING BY A ACTUATOR
PATULOUS STATE

⑤ 図示の位置にロットNO. を刻印する。
LOT NO. SHALL BE MARKED
AT THE SPECIFIED POSITION.

※この注記は1, 2ページ目へのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT		ANGLE						
		mm		3RD		REFER	TO SHEET	1/3		
					NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
					PART NAME / 品名					
					FPC ASSY RA SMT 0.5mm PITCH ZIF TYPE UPPER CONTACT					
ANGLE / 角度 ±3°		SCALE N1S	DATE 2-06-14							
DRAWN N. NAKAJIMA	DESIGNED N. NAKAJIMA	CHECKED	APPROVED Y. FUJII	PART NO. / 型番 04 6808 6XX 000 846 +						
 KYOCERA Corporation				DWG NO. / 図番 BJS 6808002					SHEET/REV 2/3 A	

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6808 6XX 000 846 +	5000			00 6808 6XX 000 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


1. 梱包数量 : 5000 個/リール
PACKING QUANTITY : 5000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

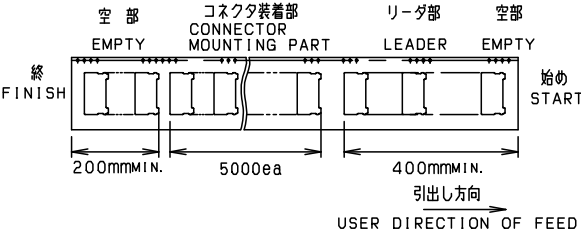

4. 型番
P/N

04 6808 6XX 000 846 +

バリエーション
VARIATION
6: ハロゲンフリー品 (UL94V-0)


極数
NO. OF POS.

めっきコート
PLATING CODE
846+: AU PLATING
PD FREE


※この注記の1~3は3ページ目にも適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極数 NO. OF POS.	A	B	C
7	16.0	7.5	22.4


※この表は3ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

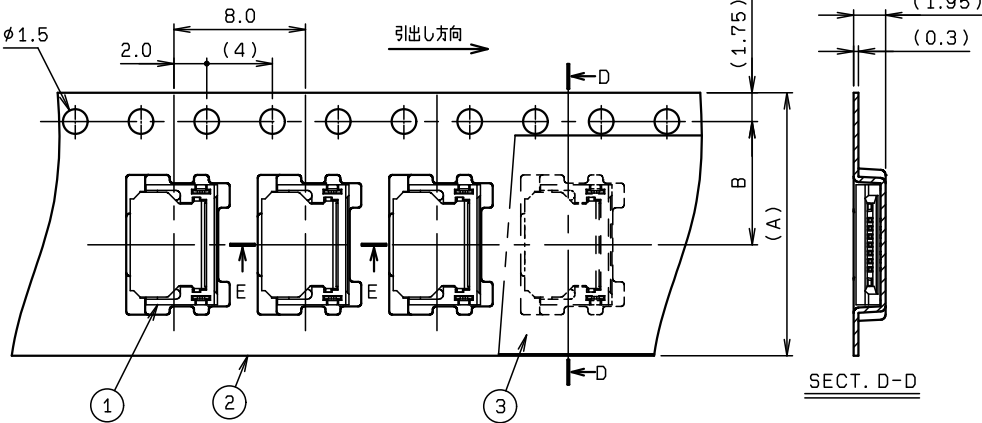


SECT. D-D

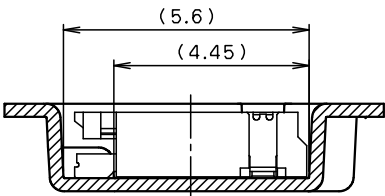

SECT. E-E (S=8/1)

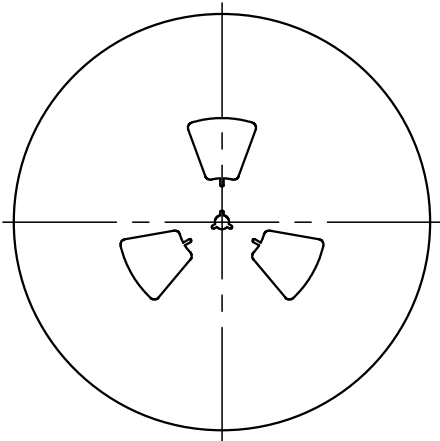

REEL DIMENSION (S=1/5)

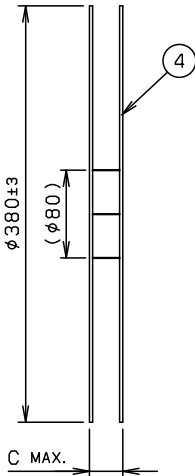

C MAX.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		REFER TO SHEET		1/3	
X < 10 ±0.2		UNIT		NO.		EDN/DCN	
10 ≤ X < 30 ±0.25		mm		DATE		ISSUE	
30 ≤ X ±0.3		3RD		2-06-14		CHECKED	
ANGLE / 角度		SCALE		DATE		APPROVED	
±3°		3 : 1		2-06-14		Y. FUJII	
DRAWN		DESIGNED		CHECKED		APPROVED	
N. NAKAJIMA		N. NAKAJIMA		Y. FUJII		04 6808 6XX 000 846 +	
KYOCERA		KYOCERA Corporation		DWG NO. / 図番		BJS 6808002	
				SHEET/REV		3/3 A	