

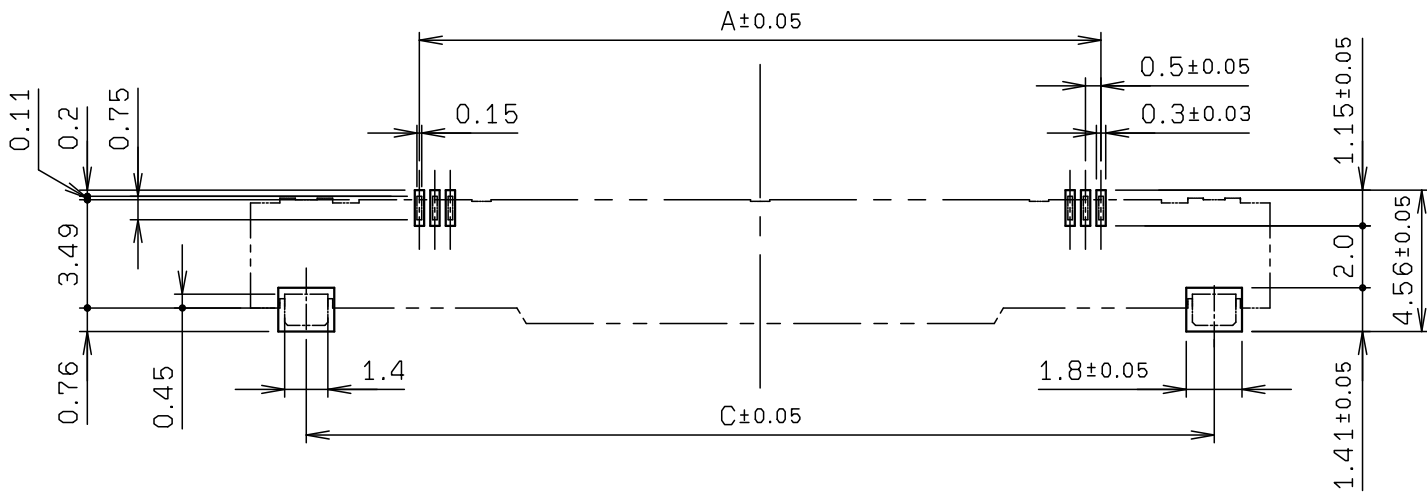
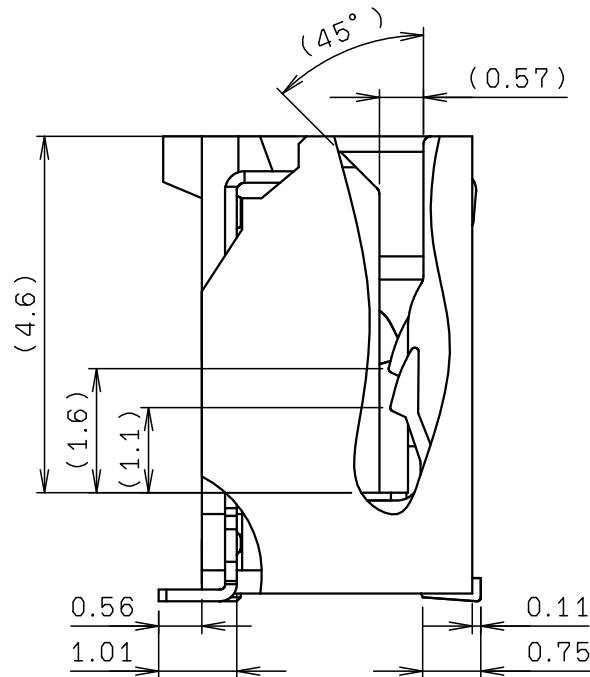
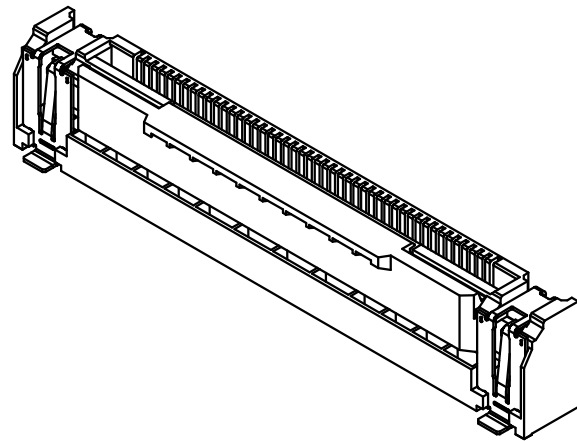


© 2024 KYOCERA Corporation

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

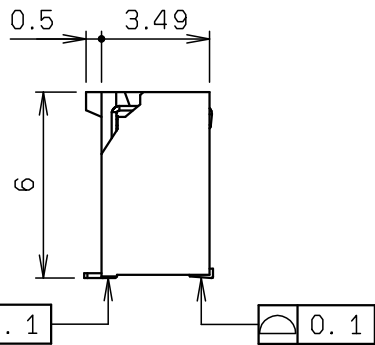

MOUNTING LAYOUT

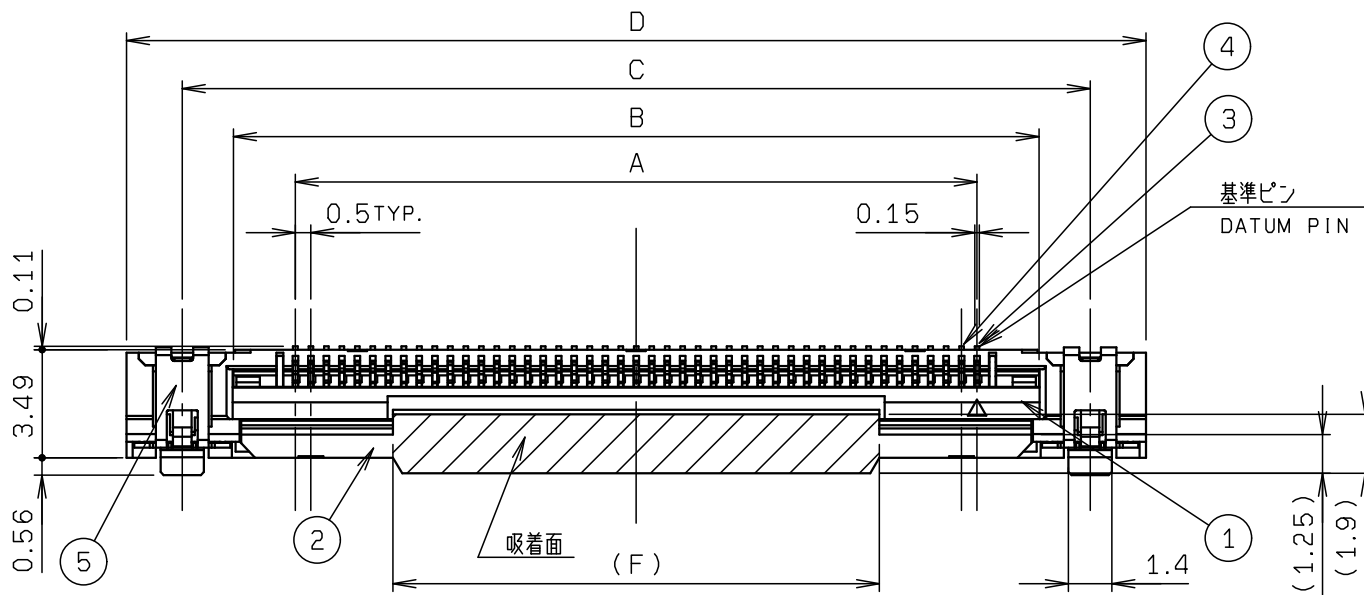

SECT. P-P

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94 V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		UL94 V-0
3	SIGNAL CONTACT A		N	COPPER ALLOY		AU PLATING
4	SIGNAL CONTACT B			COPPER ALLOY		AU PLATING
5	SPRING		2	SUS		Sn-Cu PLATING

NO OF POS.	DIMENSION				
	A	B	C	D	F
20	9.5	13.58	16.8	20.4	3.2
30	14.5	18.58	21.8	25.4	8.2
35	17.0	21.08	24.3	27.9	10.7
40	19.5	23.58	26.8	30.4	13.2
45	22.0	26.08	29.3	32.9	15.7
50	24.5	28.58	31.8	35.4	18.2
60	29.5	33.58	36.8	40.4	23.2

※この表は1～2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 TO 2 ONLY.

REV. C127SHEET1/4-4/4から
SHEET1/3-3/3へ変更

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		L	DCN24712	2024/12/26	S. MORITA		Y. TSURUOKA
				K	DCN22309	2022/05/27	S. MORITA	H. LU	A. TSUNEMURA
				O	EDN-079	2015/02/17	N. NAKAJIMA		Y. FUJII
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
				0.5mm PITCH FPC/FFC CONN.					
				VT SMT NON-ZIF TYPE					
				PART NO. / 型番					
				04 6810 6XX 002 846 +					
				DWG NO. / 図番					
				BJS 6810005					
				SHEET REV					
				1/3 L					

KYOCERA

8

7

6

5


4

3

2

1

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6810 6XX 002 846 +	1200			00 6810 6XX 002 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

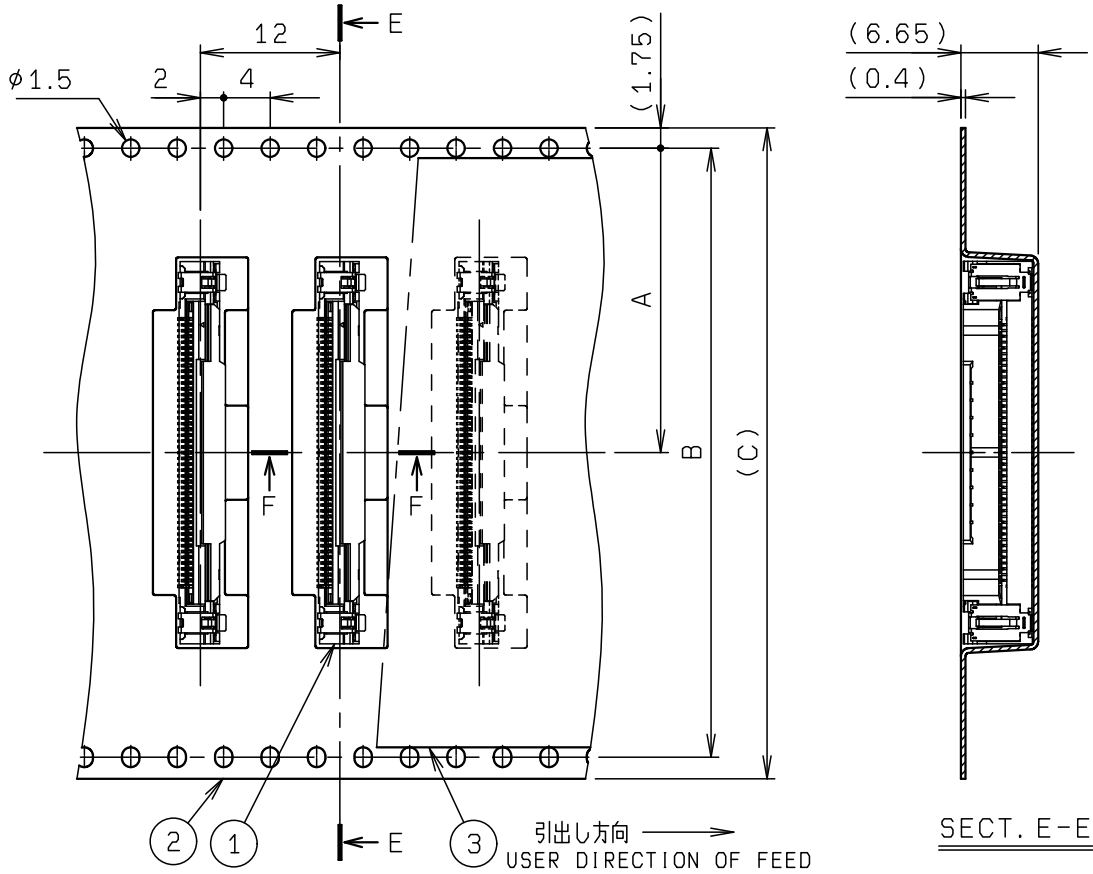


極 数 NO. OF POS.	A	B	C	D
20	14.2	28.4	32.0	38.4
30	20.2	40.4	44.0	50.4
35	20.2	40.4	44.0	50.4
40	20.2	40.4	44.0	50.4
45	26.2	52.4	56.0	62.4
50	26.2	52.4	56.0	62.4
60	26.2	52.4	56.0	62.4


※この表は3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

注 記
NOTE

1. 梱包数量 : 1200 個/リール
PACKING QUANTITY : 1200 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY

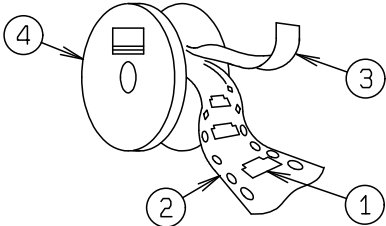

3. 引出し方向
USER DIRECTION OF FEED

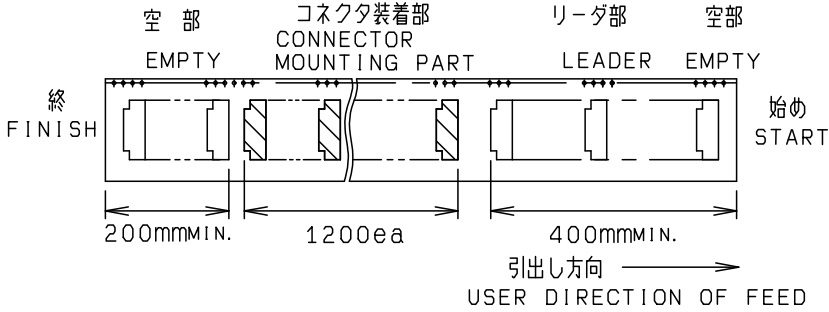

4. 型 番
P/N 04 6810 6XX 002 846 +



極 数
NO. OF POS.

バリエーション
VARIATION
0 : 通常タイプ THE USUAL KIND

バリエーション
VARIATION
2 : VT TYPE WITHOUT GND CONT

めっき
PLATING
SINGNAL CONT AU
SPRING Sn-Cu

※この注記の1~3は3ページ目にのみ適用
※THSEE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

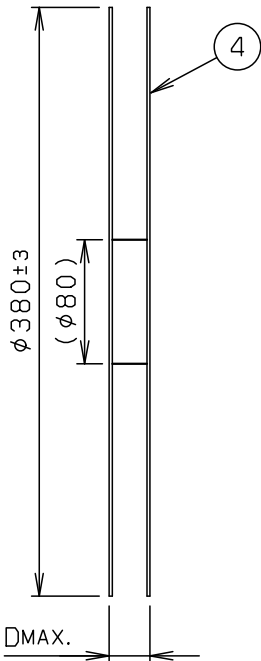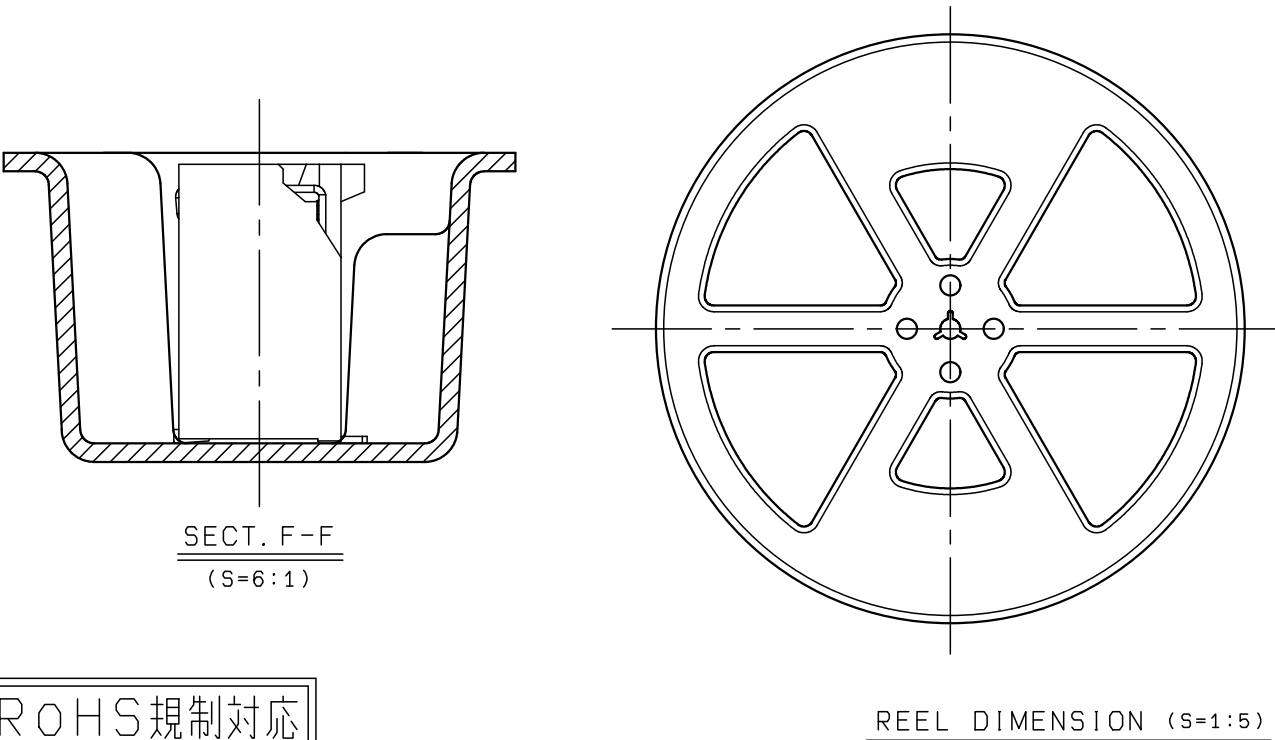

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格								
		POLYSTYRENE (CLEAR)								
		UNIT		ANGLE		REFER TO SHEET		1/3		
		mm		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED
X <10 ±0.2				PART NAME / 品名						
10≤ X <30 ±0.25				PARTS EMBOSS TAPE ASSY VT SMT						
30≤ X ±0.3				0.5mm PITCH FPC CONNECTOR						
ANGLE / 角度		SCALE		DATE						
		NTS		2015/02/17						
±3°										
DRAWN		DESIGNED		CHECKED		PART NO. / 型番				
N. NAKAJIMA		N. NAKAJIMA		Y. FUJII		04 6810 6XX 002 846 +				
				DWG NO. / 図番					SHEET/REV	
				BJS 6810005					3/3 L	

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS