
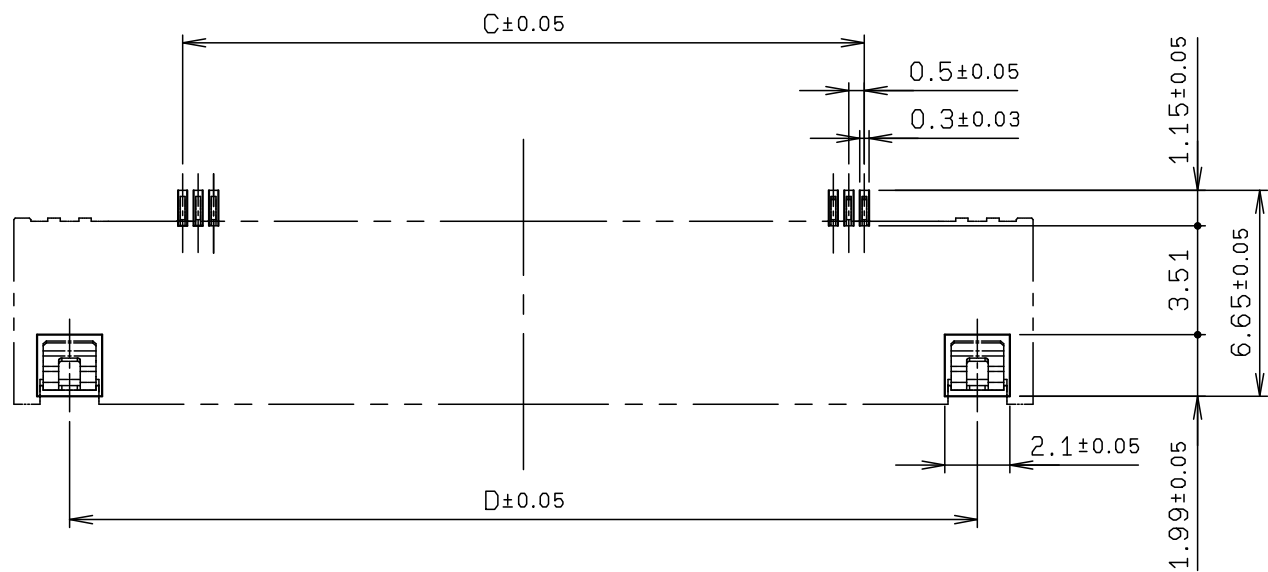
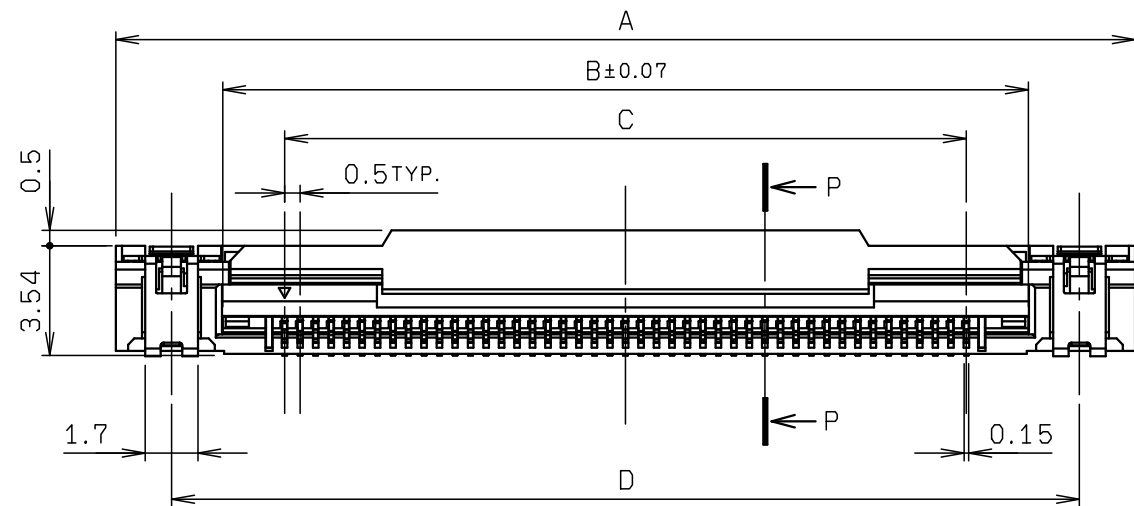





ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

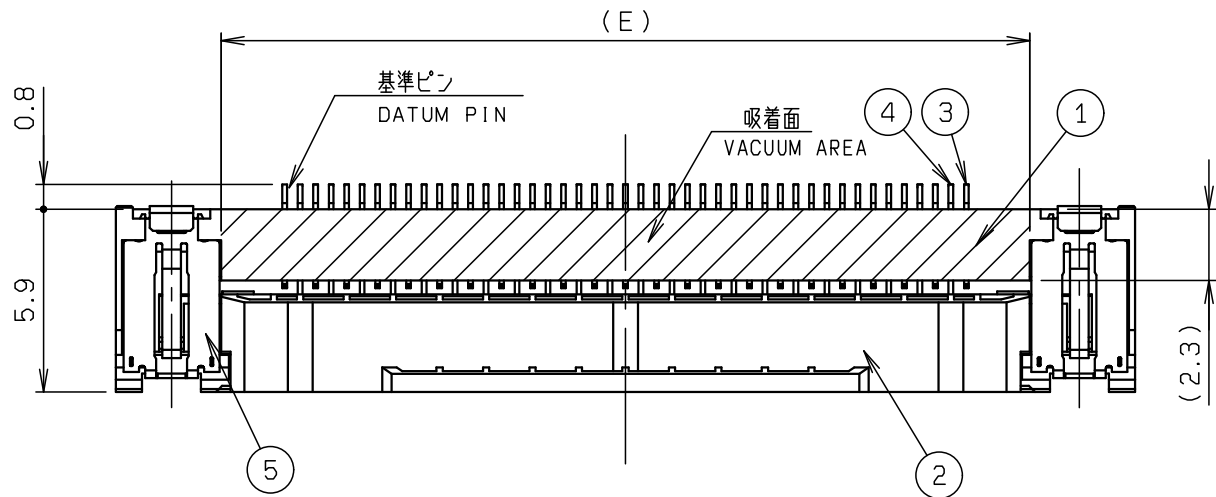

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94 V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		UL94 V-0
3	SIGNAL CONTACT A		N	COPPER ALLOY		AU PLATING
4	SIGNAL CONTACT B			COPPER ALLOY		AU PLATING
5	SPRING		2	SUS		Sn-Cu PLATING

NO OF POS.	DIMENSION				
	A	B	C	D	E
10	15.4	8.58	4.5	11.8	8.6
15	17.9	11.08	7.0	14.3	11.1
20	20.4	13.58	9.5	16.8	13.6
30	25.4	18.58	14.5	21.8	18.6
35	27.9	21.08	17.0	24.3	21.1
40	30.4	23.58	19.5	26.8	23.6
45	32.9	26.08	22.0	29.3	26.1
50	35.4	28.58	24.5	31.8	28.6
60	40.4	33.58	29.5	36.8	33.6




※この表は1～2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 TO 2 ONLY.

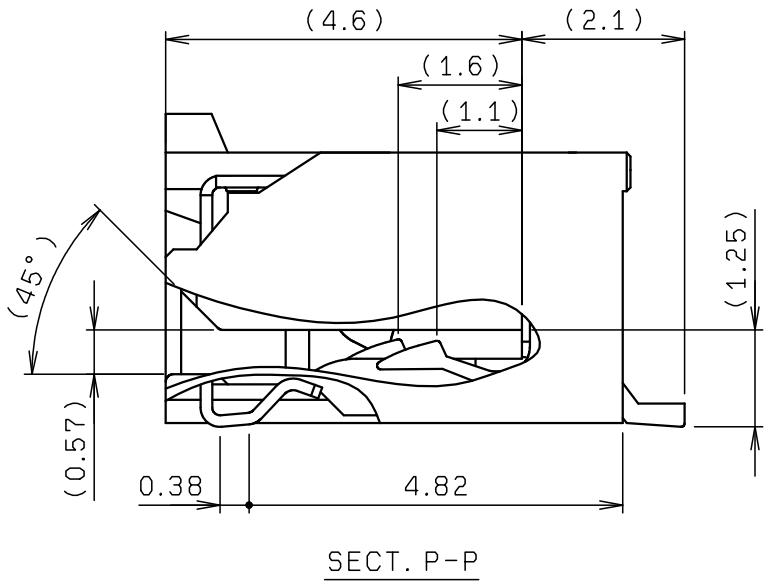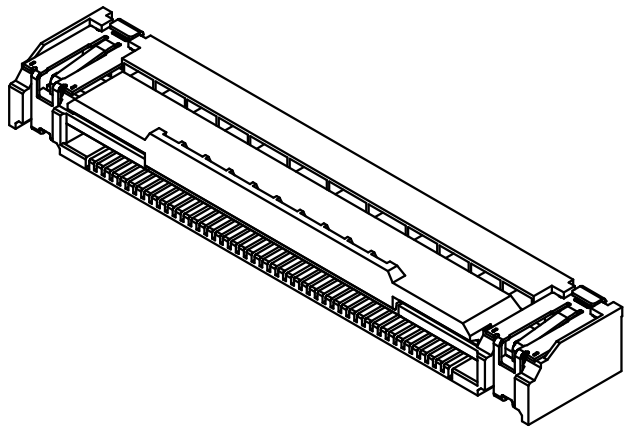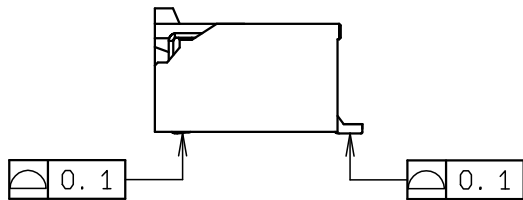

REV. B127SHEET1/4-4/4か5
SHEET1/3-3/3へ変更


TOLERANCE / 一般公差(S) X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 _____		K	DCN24712	2024/12/26	S. MORITA		Y. TSURUOKA		
				J	DCN22309	2022/05/27	S. MORITA	H. LU	A. TSUNEMURA		
		UNIT mm		ANGLE 3RD		O	EDN-151	2017/03/30	Y. MANBA	N. NAKAJIMA	Y. FUJII
						NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE NJS		DATE 2017/03/30		PART NAME / 品名 0.5mm PITCH FPC/FFC CONN. RA SMT NON-ZIF TYPE					
DRAWN M. TAKAHASHI	DESIGNED Y. MANBA	CHECKED N. NAKAJIMA	APPROVED Y. FUJII	PART NO. / 型番 04 6810 6XX 023 846 + T							
				DWG NO. / 図番 BJS 6810018				SHEET/REV 1/3 K			

KYOCERA

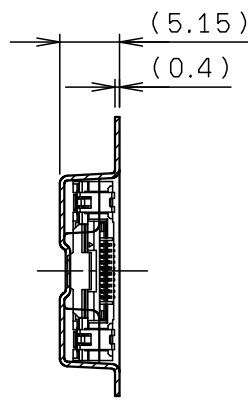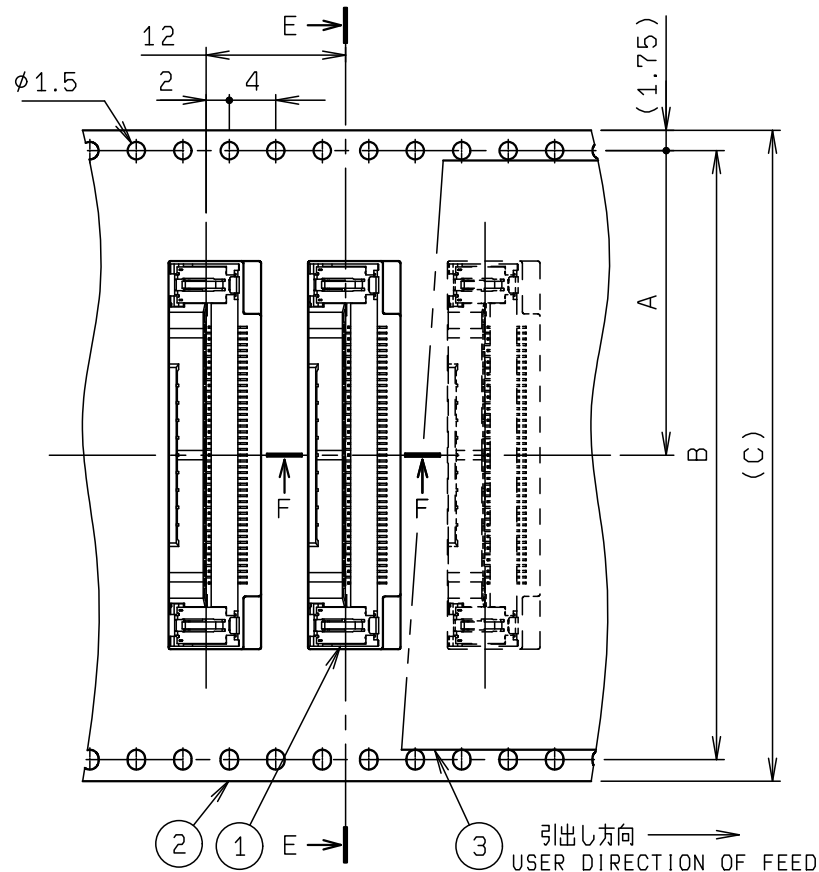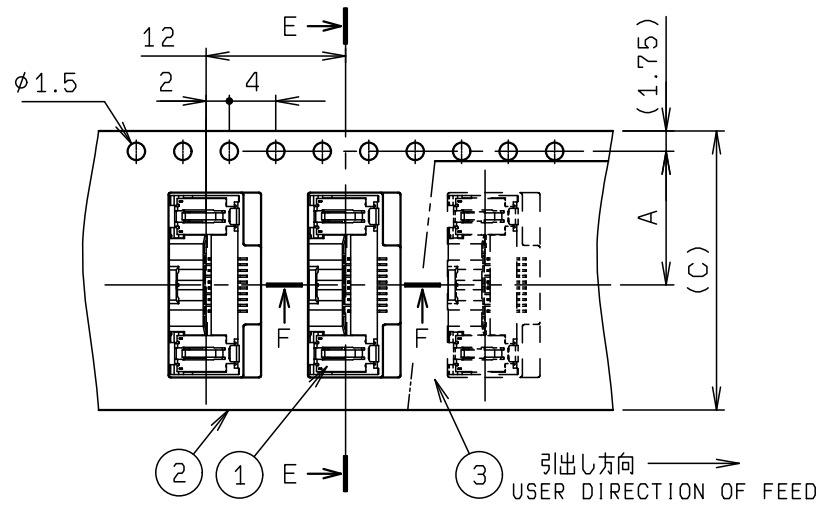


SECT. E-E

(10P)

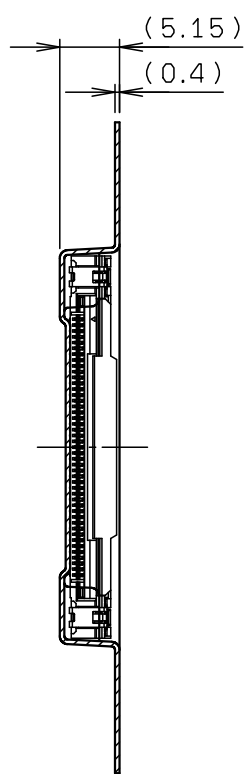


SECT. E-E

(15P~)

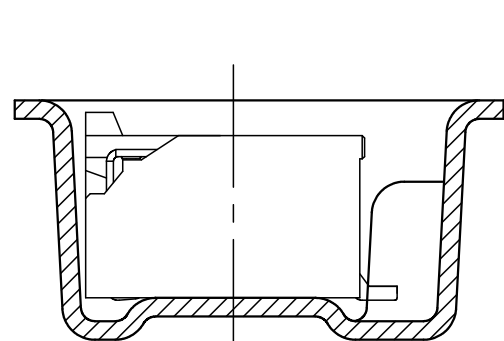


SECT. F-F

(S=6:1)

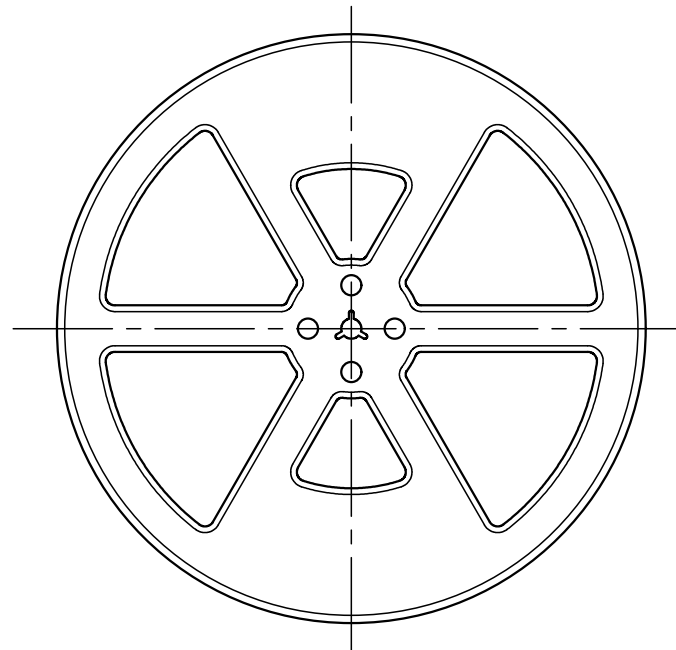

REEL DIMENSION (S=1:5)

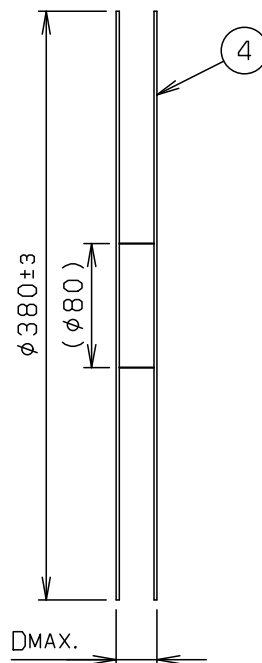


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6810 6XX 023 846 + T	1500			00 6810 6XX 023 846 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

極 数 NO. OF POS.	A	B	C	D
10	11.5	---	24.0	30.4
15	14.2	28.4	32.0	38.4
20	14.2	28.4	32.0	38.4
30	20.2	40.4	44.0	50.4
35	20.2	40.4	44.0	50.4
40	20.2	40.4	44.0	50.4
45	26.2	52.4	56.0	62.4
50	26.2	52.4	56.0	62.4
60	26.2	52.4	56.0	62.4


※この表は3ページ目にも適用
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

注 記
NOTE

- 梱包数量 : 1500 個/リール
PACKING QUANTITY : 1500 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY

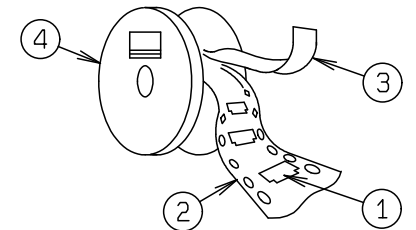

- 引出し方向
USER DIRECTION OF FEED

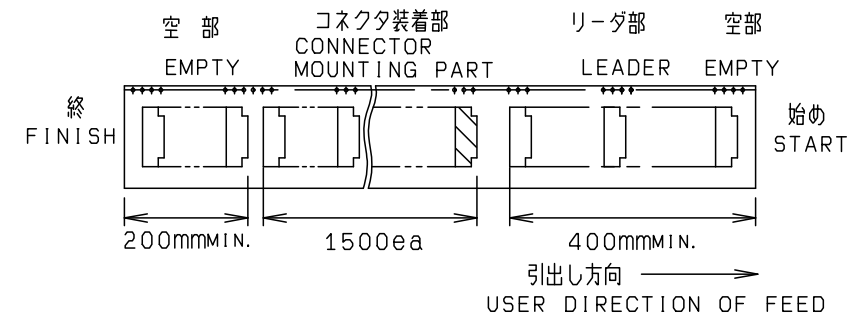

- 型 番
P/N 04 6810 6XX 023 846 + T
- 極 数
NO. OF POS.
- バリエーション
VARIATION 2 : 125℃対応タイプ THE 125℃ OF KIND
- バリエーション
VARIATION 3 : RA TYPE WITHOUT GND CONT
- めっき
PLATING

※この注記の1~3は3ページ目にも適用
※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

TOLERANCE / 一般公差 (S) X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 POLYSTYRENE (CLEAR)									
		UNIT mm	ANGLE 3RD	REFER TO SHEET 1/3							
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED		
		SCALE 3 : 2		DATE 2017/03/30		PART NAME / 品名 PARTS EMBOSS TAPE ASSY RA SMT 0.5mm PITCH FPC CONNECTOR					
		DRAWN M. TAKAHASHI		DESIGNED Y. MANBA		CHECKED N. NAKAJIMA		APPROVED Y. FUJII		PART NO. / 型番 04 6810 6XX 023 846 + T	
				DWG NO. / 図番 BJS 6810018					SHEET/REV 13/3 K		

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA