

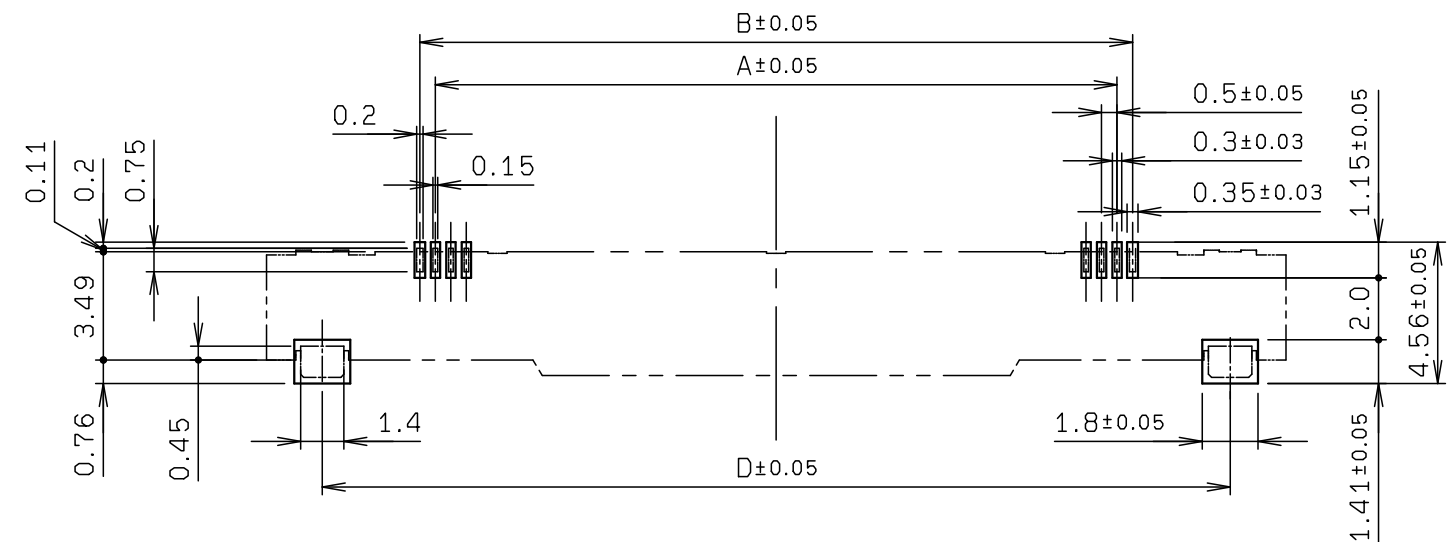


© 2024 KYOCERA Corporation

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

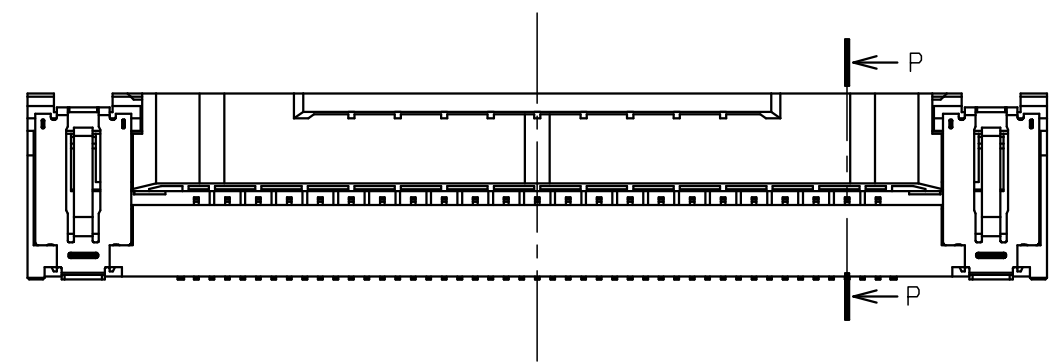



MOUNTING LAYOUT

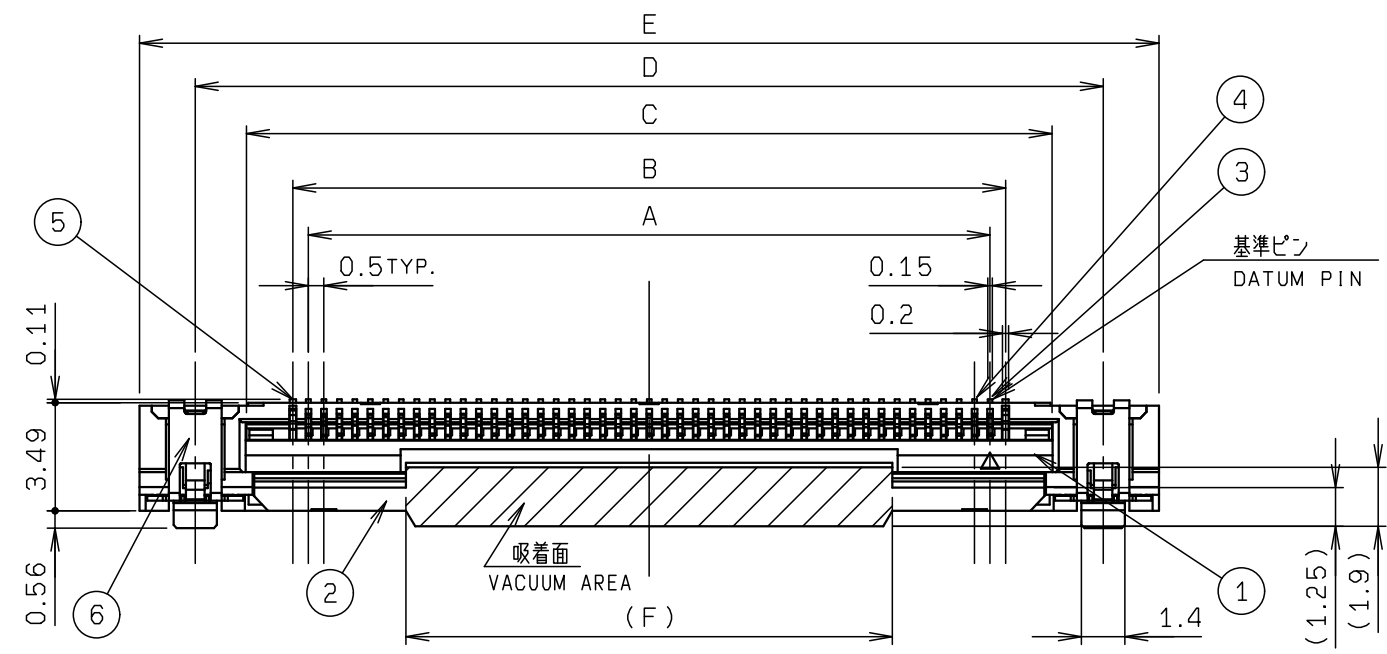

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94 V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		UL94 V-0
3	SIGNAL CONTACT A		N	COPPER ALLOY		AU PLATING
4	SIGNAL CONTACT B			COPPER ALLOY		AU PLATING
5	GND CONTACT		2	COPPER ALLOY		Sn-Cu PLATING
6	SPRING		2	SUS		Sn-Cu PLATING

NO OF POS.	DIMENSION					
	A	B	C	D	E	F
10	4.5	5.5	8.58	11.8	15.4	3.2
15	7.0	8.0	11.08	14.3	17.9	3.2
20	9.5	10.5	13.58	16.8	20.4	3.2
30	14.5	15.5	18.58	21.8	25.4	8.2
35	17.0	18.0	21.08	24.3	27.9	10.7
40	19.5	20.5	23.58	26.8	30.4	13.2
45	22.0	23.0	26.08	29.3	32.9	15.7
50	24.5	25.5	28.58	31.8	35.4	18.2
60	29.5	30.5	33.58	36.8	40.4	23.2


※この表は1～3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 TO 3 ONLY.

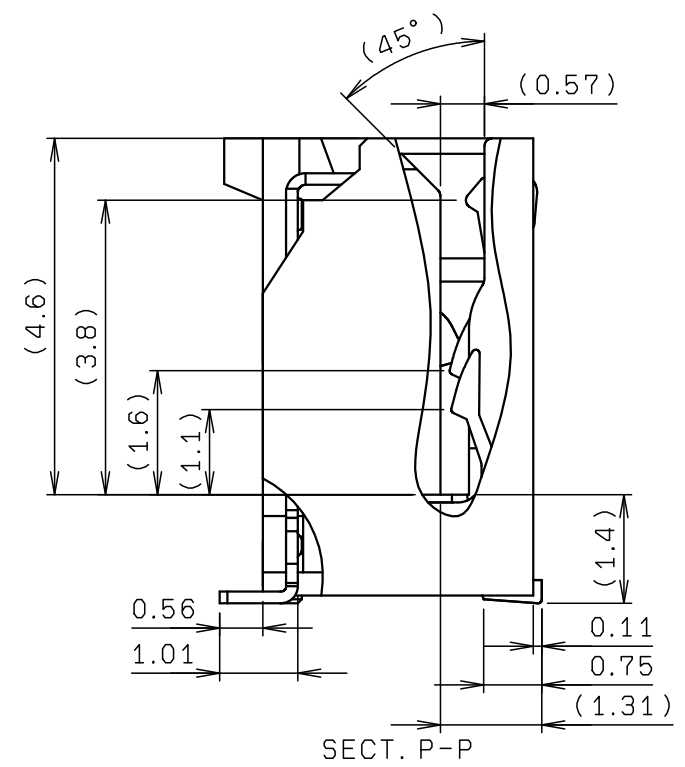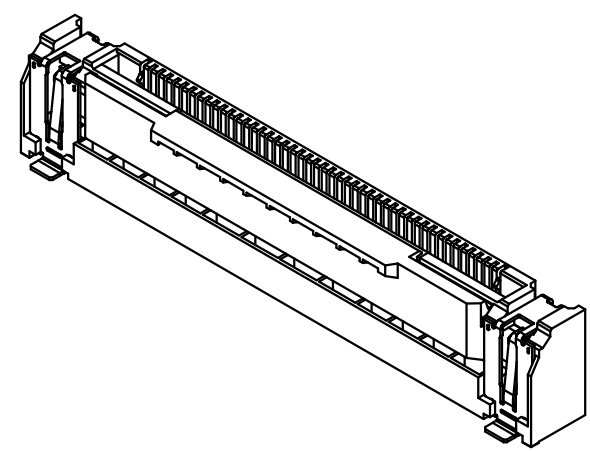

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		F	DCN24712	2024/12/26	S. MORITA		Y. TSURUOKA
				E	DCN22309	2022/05/27	S. MORITA	H. LU	A. TSUNEMURA
				O	EDN-276	2017/06/06	Y. MANBA	N. NAKAJIMA	Y. FUJII
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
				0.5mm PITCH FPC/FFC CONN.					
				VT SMT NON-ZIF TYPE					
				PART NO. / 型番					
				04 6810 6XX 020 846 + T					
				DWG NO. / 図番					
				BJS 6810019					
				SHEET REV					
				1 / 4 F					




○ シールド有FFC/FPC

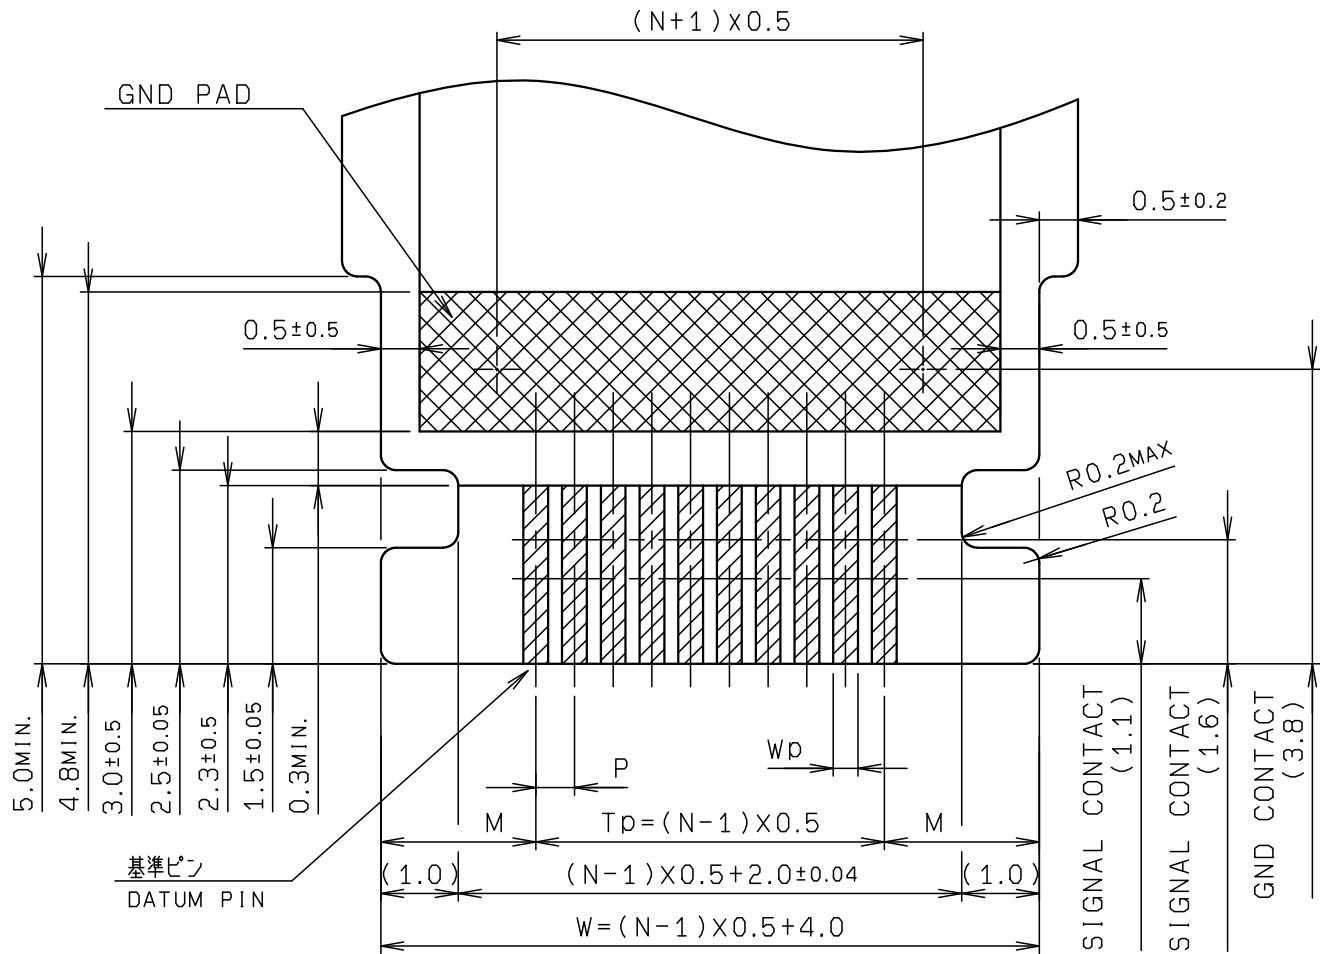

(推奨仕様)

FPC構成
FPC STRUCTURE


表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT:0.5μmMIN. Au:0.05~0.2μm

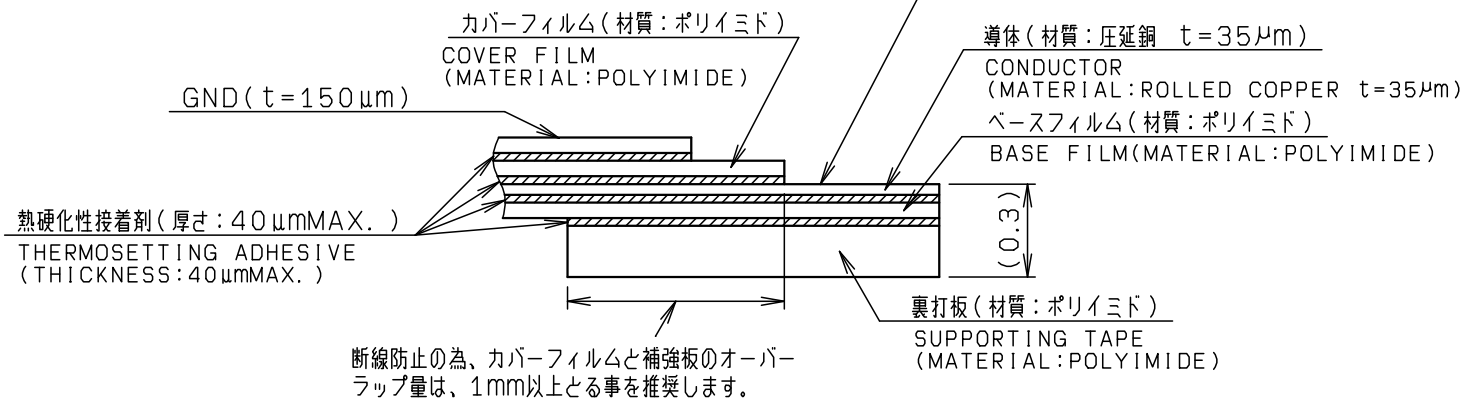

(推奨仕様)








FFC構成
FFC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT:0.5μmMIN. Au:0.05~0.2μm

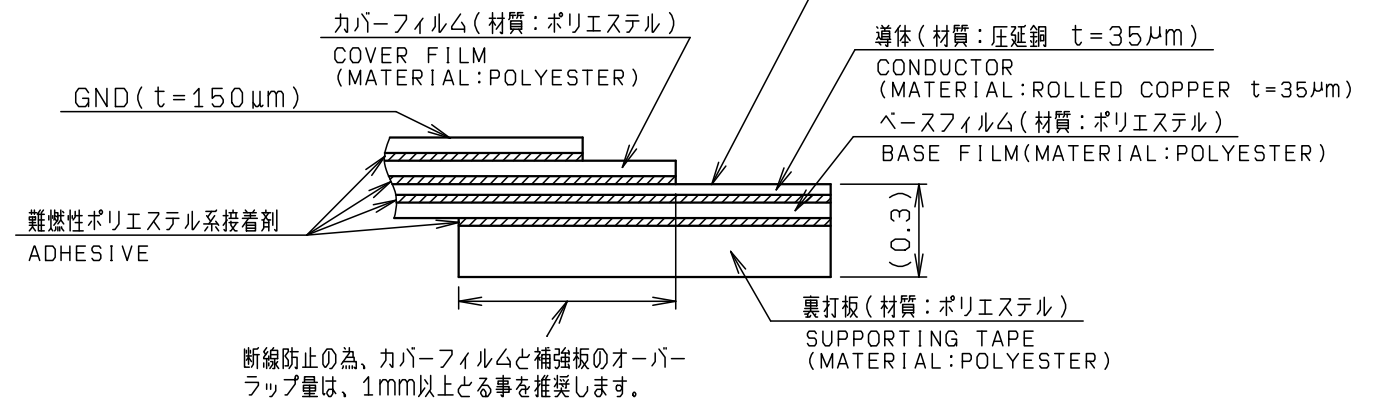

	FFC	FPC
M	2.0±0.07	2.0±0.07
P	0.5±0.03	0.5±0.03
Tp	Tp±0.05	Tp±0.03
W	W±0.05	W±0.05
Wp	0.32±0.03	0.35±0.03


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/4			
10 ≤ X < 30 ±0.25		SCALE NJS		DATE 2017/06/06		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		APPROVED Y. FUJII		PART NAME / 品名		0.5mm PITCH FPC/FFC CONN.		CHECKED	
ANGLE / 角度 ±3°		DRAWN N. NAKAJIMA		DESIGNED Y. MANBA		VT SMT NON-ZIF TYPE		APPROVED	
DRAWN N. NAKAJIMA		CHECKED N. NAKAJIMA		APPROVED Y. FUJII		PART NO. / 型番		04 6810 6XX 020 846 + T	
DWG NO. / 図番		BJS 6810019		SHEET REV		12/4		F	

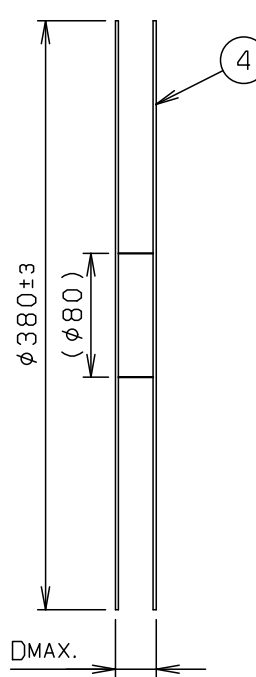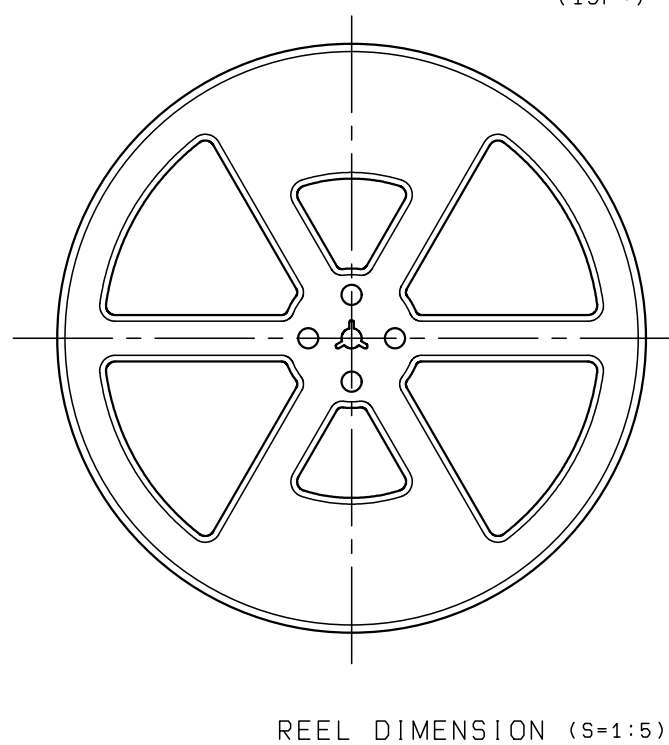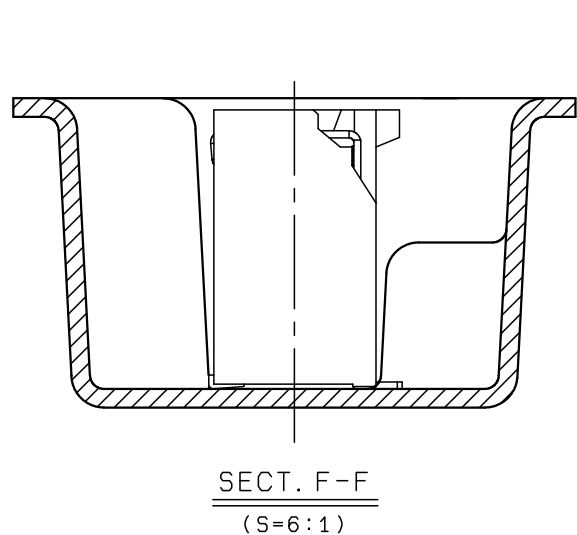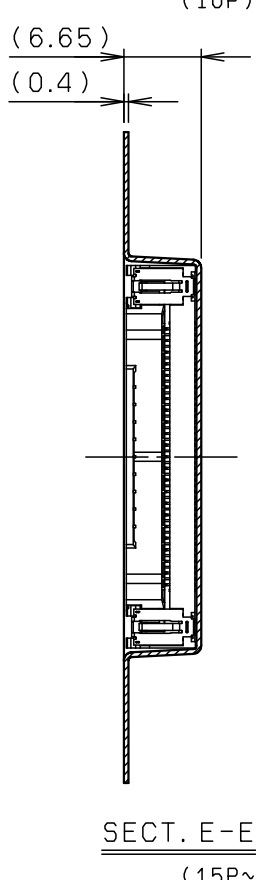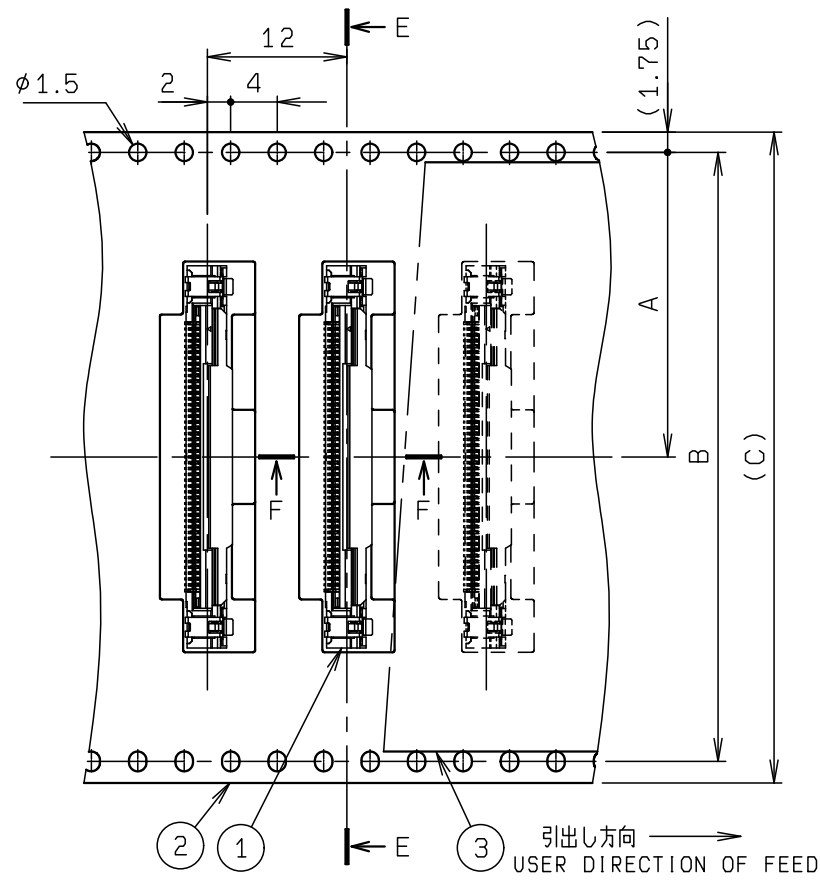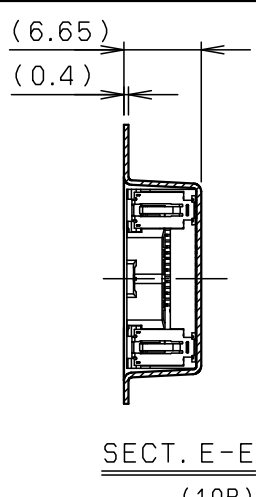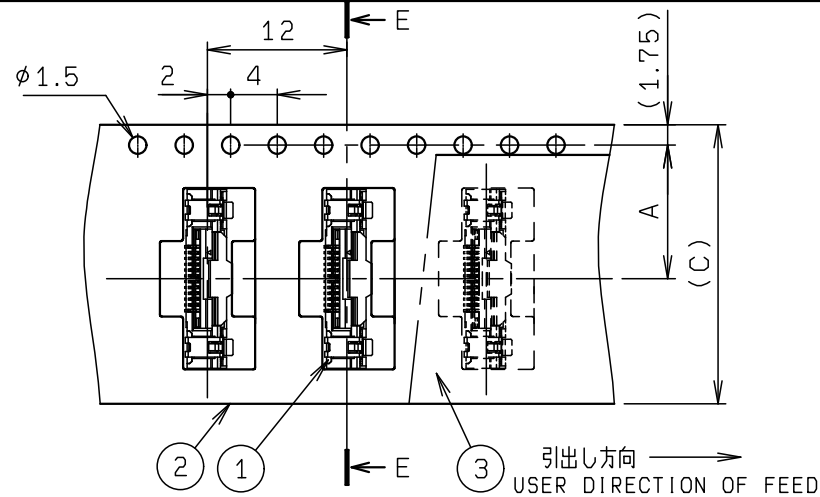


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6810 6XX 020 846 + T	1200			00 6810 6XX 020 846 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 1200 個/リール
PACKING QUANTITY : 1200 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY

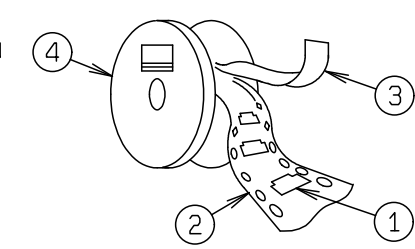

- 引出し方向
USER DIRECTION OF FEED

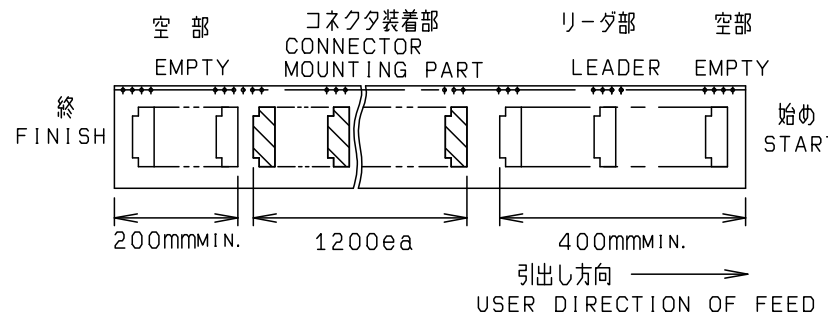

- 型 番
P/N 04 6810 6XX 020 846 + T

極 数
NO. OF POS.
バリエーション
VARIATION
2 : 125℃対応タイプ THE 125℃ OF KIND
バリエーション
VARIATION
0 : VT TYPE WITH GND CONT
めっき
PLATING

※この注記の1~3は4ページ目にも適用
※THSES NOTES 1 TO 3 ARE APPLICABLE TO SHEET-4 ONLY.

TOLERANCE / 一般公差 (S) X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格							
		POLYSTYRENE (CLEAR)							
		UNIT mm	ANGLE 3RD	REFER TO SHEET		1/4			
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE 3 : 2		DATE 2017/06/06		PART NAME / 品名 PARTS EMBOSS TAPE ASSY VT SMT 0.5mm PITCH FPC CONNECTOR			
DRAWN N. NAKAJIMA	DESIGNED Y. MANBA	CHECKED N. NAKAJIMA	APPROVED Y. FUJII	PART NO. / 型番 04 6810 6XX 020 846 + T					
				DWG NO. / 図番				SHEET REV	
				BJS 6810019				14/4 F	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

