
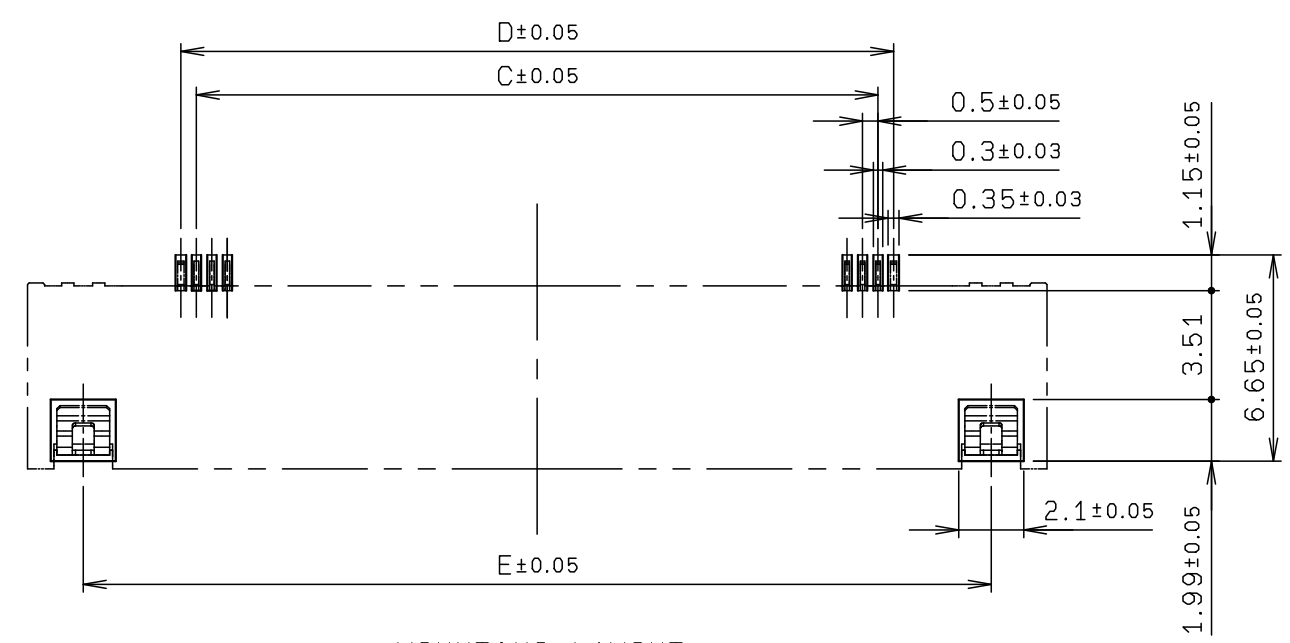
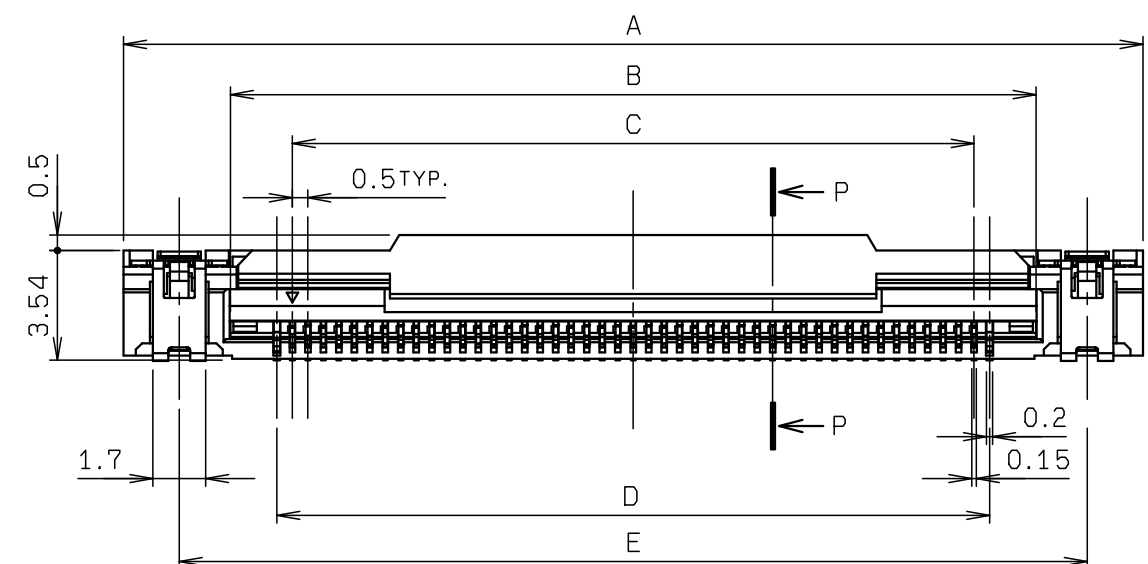


© 2024 KYOCERA Corporation

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



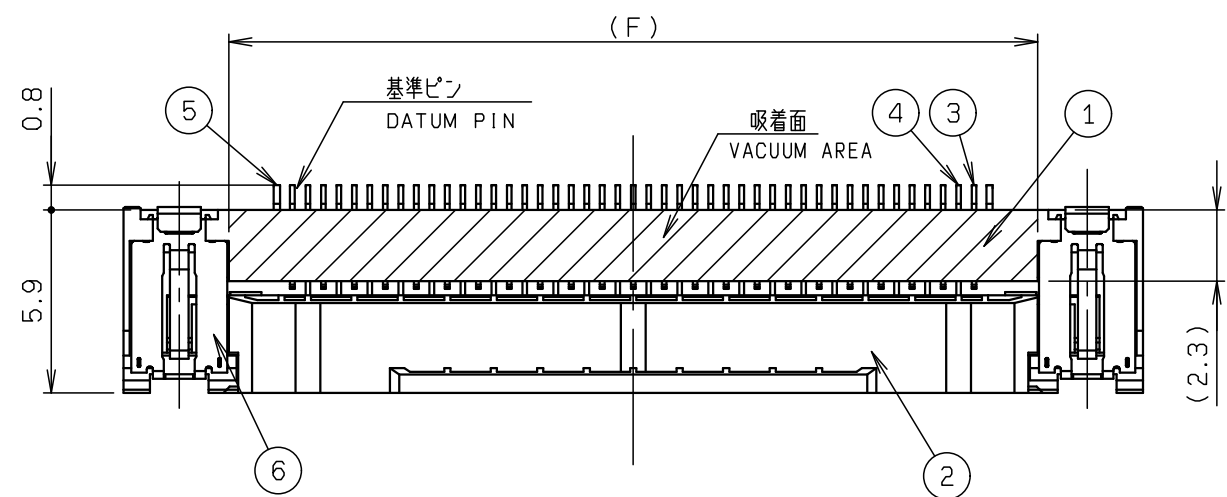


MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		UL94 V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		UL94 V-0
3	SIGNAL CONTACT A		N	COPPER ALLOY		Au PLATING
4	SIGNAL CONTACT B			COPPER ALLOY		Au PLATING
5	GND CONTACT		2	COPPER ALLOY		Sn-Cu PLATING
6	SPRING		2	SUS		Sn-Cu PLATING

NO OF POS.	DIMENSION					
	A	B	C	D	E	F
7	13.9	7.08	3.0	4.0	10.3	7.1
10	15.4	8.58	4.5	5.5	11.8	8.6
15	17.9	11.08	7.0	8.0	14.3	11.1
20	20.4	13.58	9.5	10.5	16.8	13.6
30	25.4	18.58	14.5	15.5	21.8	18.6
35	27.9	21.08	17.0	18.0	24.3	21.1
40	30.4	23.58	19.5	20.5	26.8	23.6
45	32.9	26.08	22.0	23.0	29.3	26.1
50	35.4	28.58	24.5	25.5	31.8	28.6
60	40.4	33.58	29.5	30.5	36.8	33.6



※この表は1～3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 TO 3 ONLY.

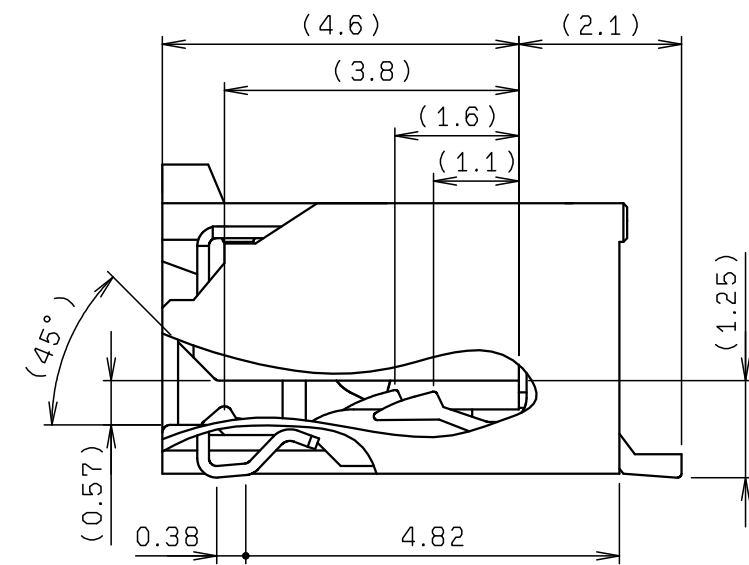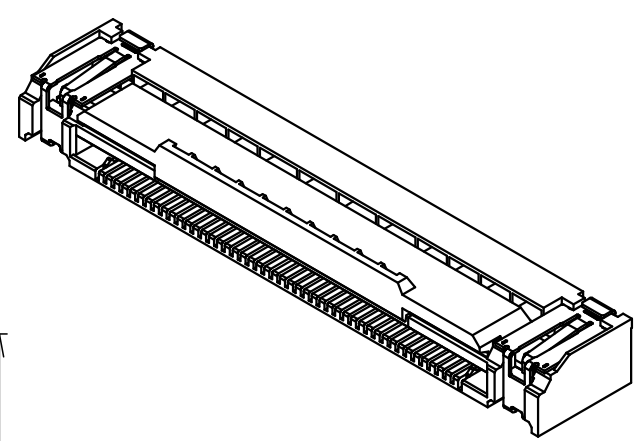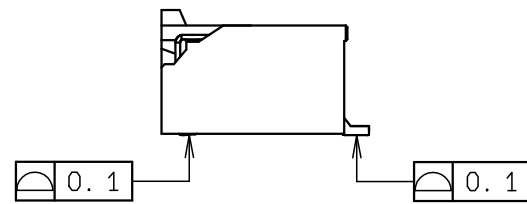


SECT. P-P

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		H	DCN24712	2024/12/26	S. MORITA	Y. TSURUOKA	
X < 10 ±0.2				G	DCN23037	2023/01/25	S. MORITA	N. KITAGAWA	N. NAKAJIMA
10 ≤ X < 30 ±0.25				O	EDN-276	2017/06/06	Y. MANBA	N. NAKAJIMA	Y. FUJII
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE NJS		PART NAME / 品名					
		DATE 2017/06/06		0.5mm PITCH FPC/FFC CONN. RA SMT NON-ZIF TYPE					
DRAWN N. NAKAJIMA		DESIGNED Y. MANBA		CHECKED N. NAKAJIMA		APPROVED Y. FUJII		PART NO. / 型番	
								04 6810 6XX 021 846 + T	
								DWG NO. / 図番	
								BJS 6810020	
								SHEET REV	
								1/4 H	




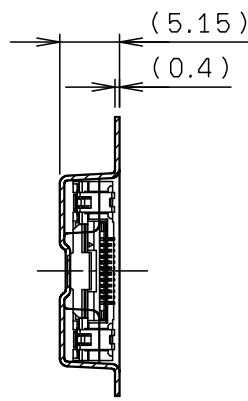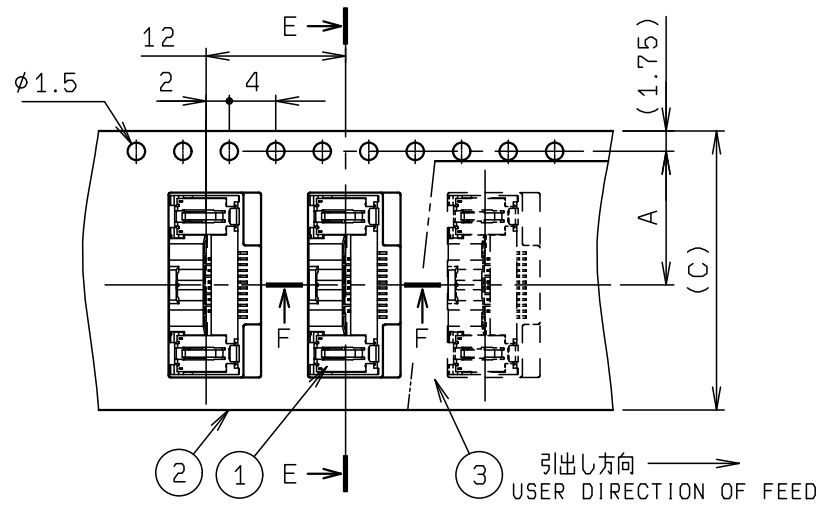


SECT. E-E
(~10P)
(5.15)
(0.4)

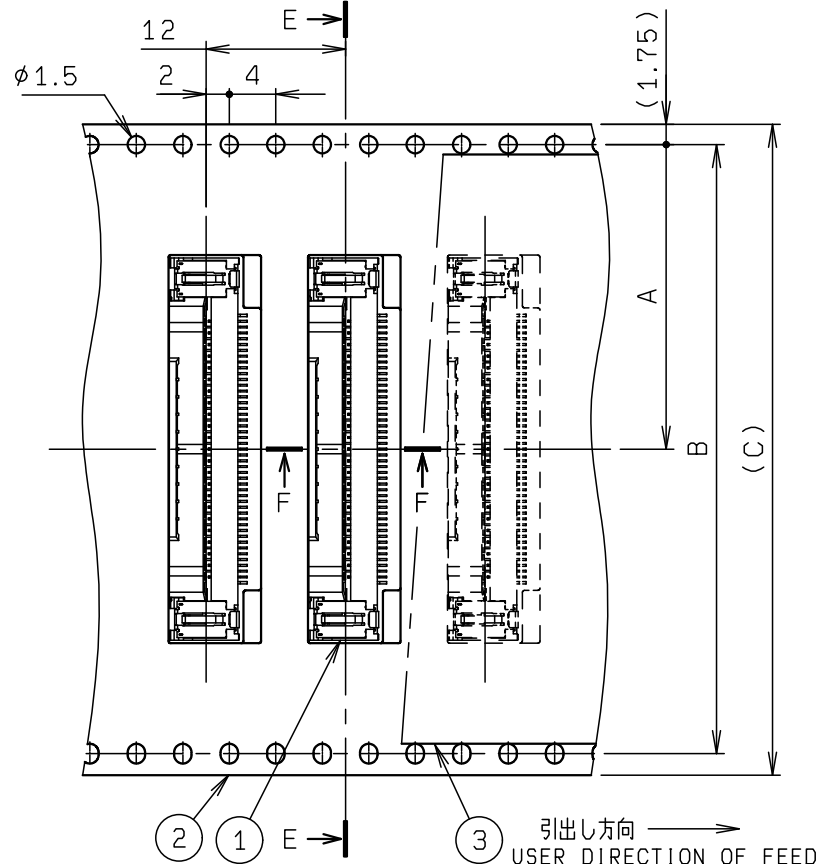


SECT. E-E
(15P~)
(5.15)
(0.4)

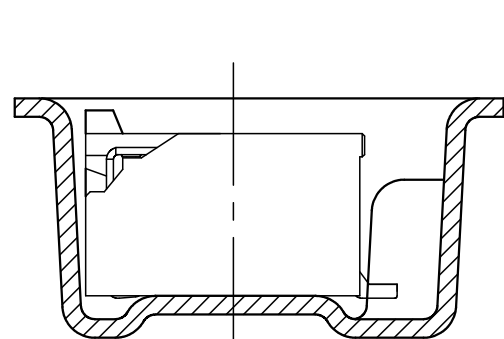

SECT. F-F
(S=6:1)

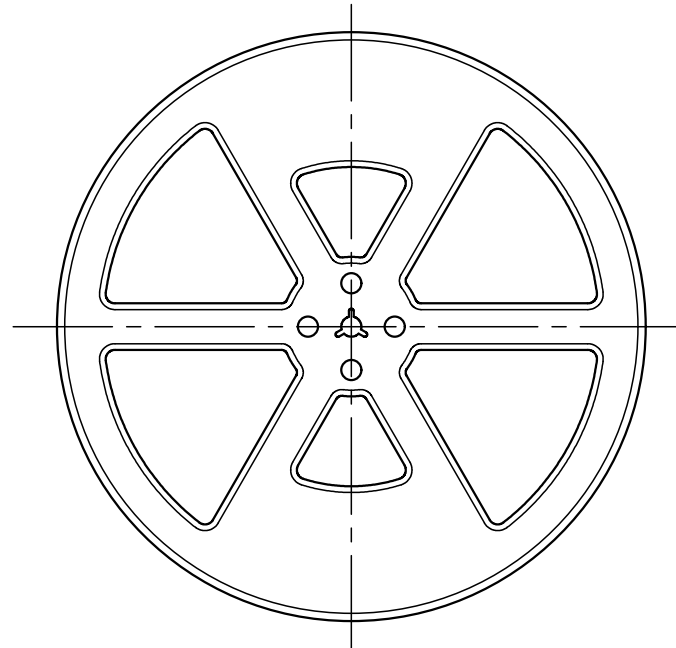


REEL DIMENSION (S=1:5)

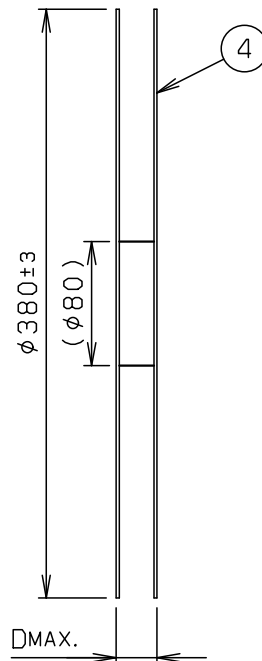


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6810 6XX 021 846 + T	1500			00 6810 6XX 021 846 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

注 記
NOTE

- 梱包数量 : 1500 個/リール
PACKING QUANTITY : 1500 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION IN DELIVERY

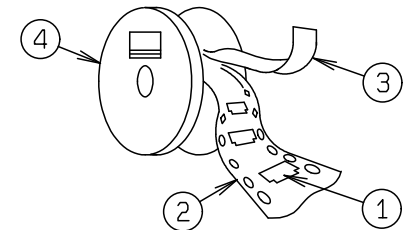

- 引出し方向
USER DIRECTION OF FEED

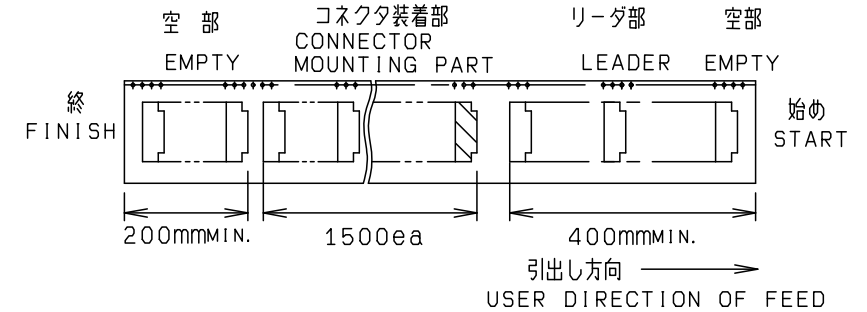

- 型 番
P/N
04 6810 6XX 021 846 + T
- 極 数
NO. OF POS.
- バリエーション
VARIATION
2 : 125℃対応タイプ THE 125℃ OF KIND
- バリエーション
VARIATION
1 : RA TYPE WITH GND CONT
- めっき
PLATING

※この注記の1~3は4ページ目にも適用
※THSES NOTES 1 TO 3 ARE APPLICABLE TO SHEET-4 ONLY.

TOLERANCE / 一般公差 (S) X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3 ANGLE / 角度 ±3°			PRODUCT SPEC / 製品規格									
			POLYSTYRENE (CLEAR)									
			UNIT		ANGLE	REFER		TO SHEET	1/4			
			mm		3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
			SCALE		DATE	PART NAME / 品名						
			3 : 2		2017/06/06		PARTS EMBOSS TAPE ASSY RA SMT 0.5mm PITCH FPC CONNECTOR					
DRAWN		DESIGNED	CHECKED	APPROVED	PART NO. / 型番							
N. NAKAJIMA		Y. MANBA	N. NAKAJIMA	Y. FUJII	04 6810 6XX 021 846 + T							
					DWG NO. / 図番					SHEET/REV		
					BJS 6810020					14/4 H		