
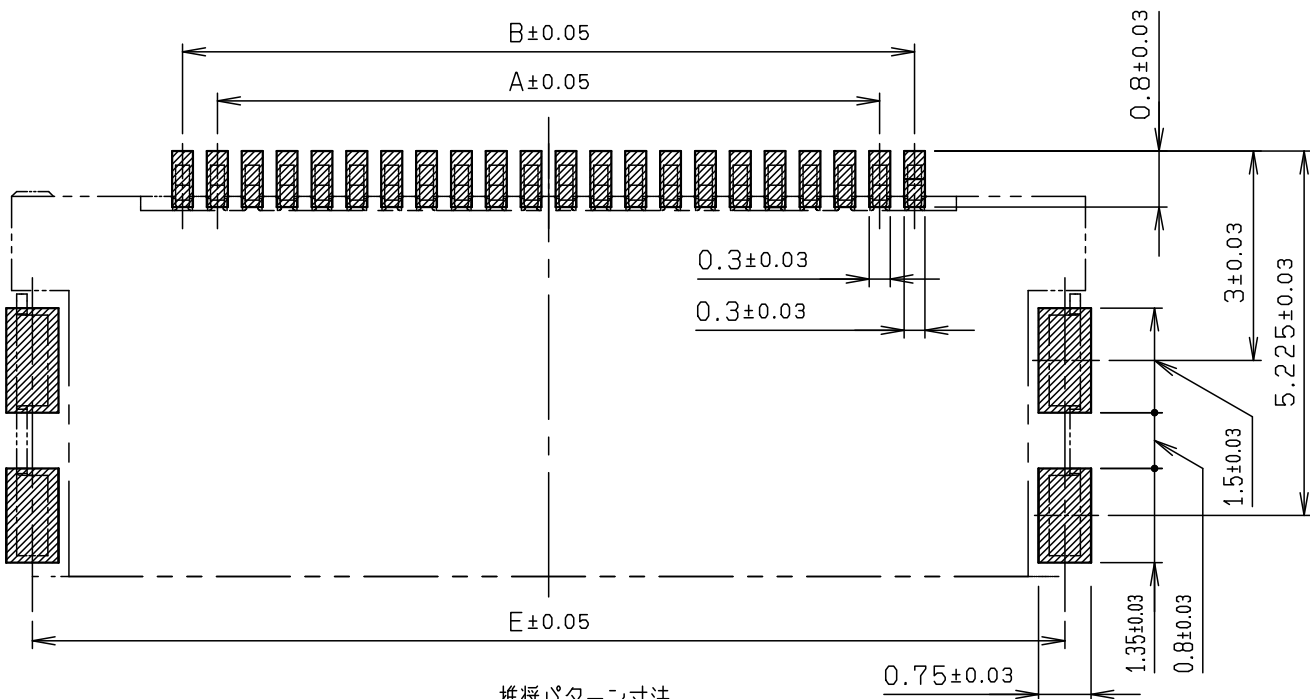
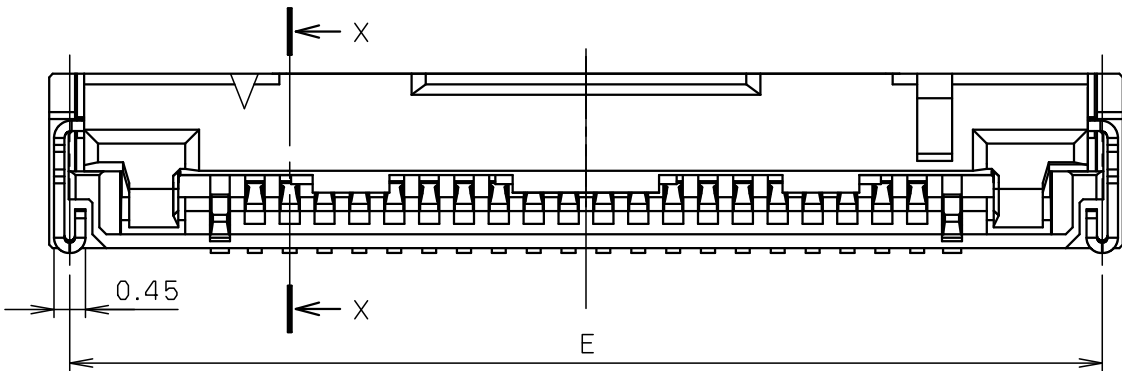


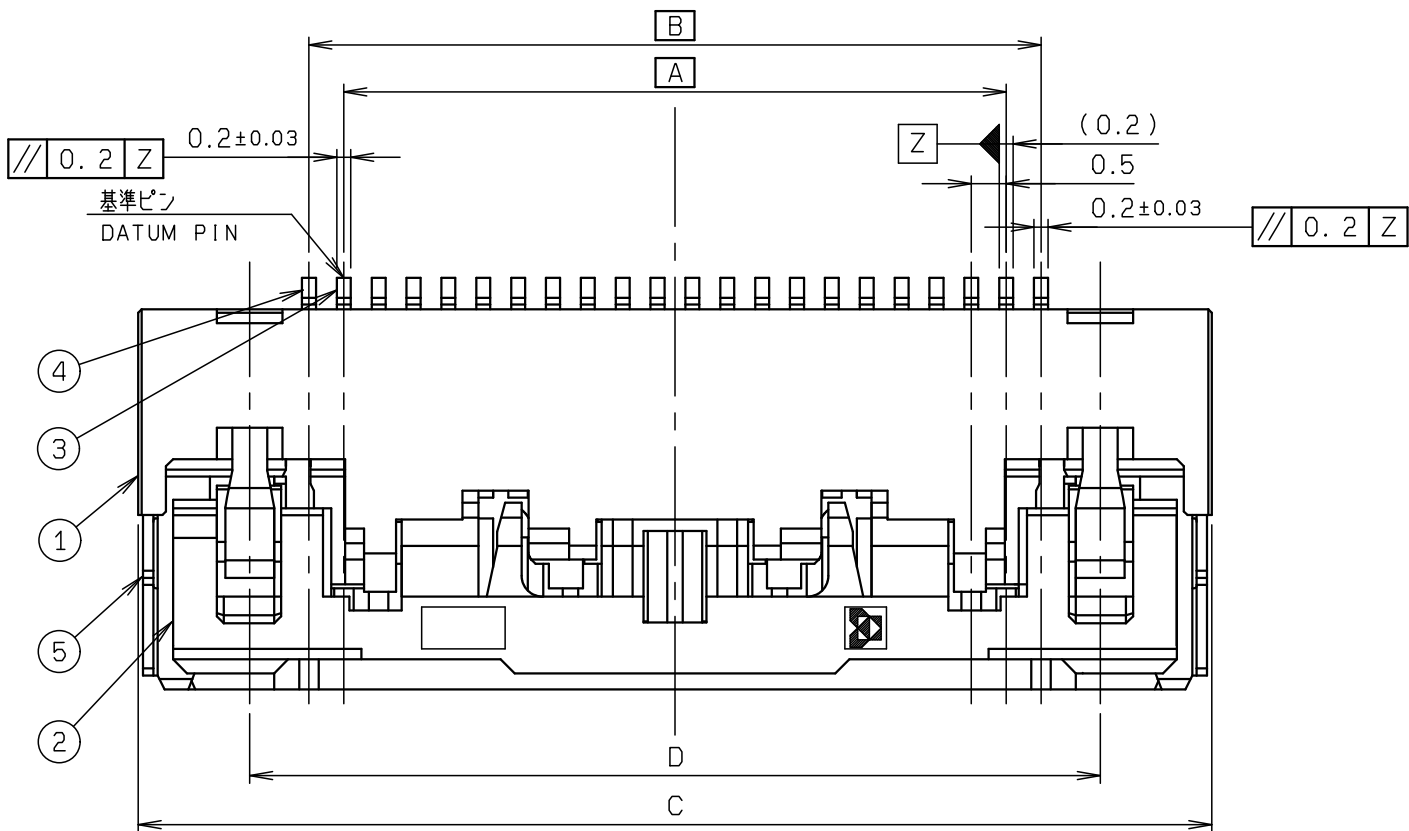

推奨パターン寸法
RECOMMENDED PATTERN LAYOUT



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		
2	ACTUATOR		1	HEAT RESISTING RESIN		
3	CONTACT		N	PHOS. BRONZE		AU PLATING
4	GND CONTACT		2	COPPER ALLOY		Sn PLATING
5	ANCHOR PLATE		2	SUS		Sn PLATING

極 数 NO. OF POS.	A	B	C	D	E
10	4.5	5.5	10.4	7.2	9.81
15	7.0	8.0	12.9	9.7	12.31
20	9.5	10.5	15.4	12.2	14.81
30	14.5	15.5	20.4	17.2	19.81
40	19.5	20.5	25.4	22.2	24.81
41	20.0	21.0	25.9	22.7	25.31
50	24.5	25.5	30.4	27.2	29.81
51	25.0	26.0	30.9	27.7	30.31

※この表は1, 2ページ目のみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

注 記
NOTE
1. コンタクトテール及び固定金具は基板より最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT SHALL BE 0.1MAX.

※この注記は1ページ目へのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

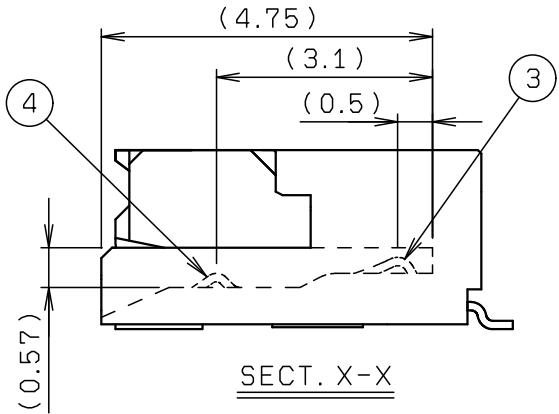
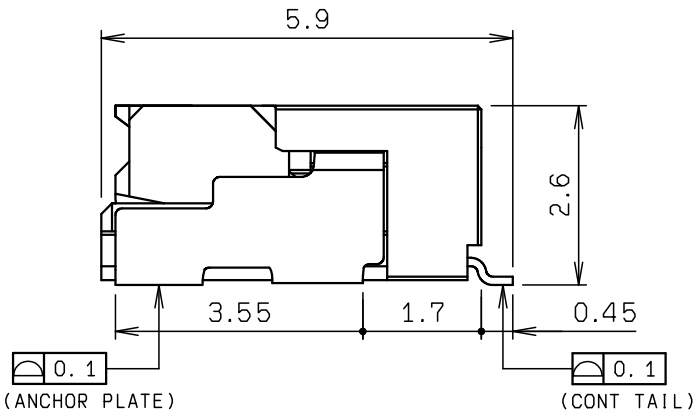


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S) X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 UNIT mm ANGLE 3RD SCALE 9 : 1 DATE 2018/10/16		J	DCN22126	2022/03/08	S. MORITA	H. LU	A. TSUNEMURA
				H	DCN22030	2022/01/14	S. MORITA	H. LU	A. TSUNEMURA
				O	EDN18317	2018/10/16	Y. MANBA	N. KITAGAWA	Y. FUJII
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
DRAWN Y. MANBA		DESIGNED Y. MANBA		CHECKED N. KITAGAWA		APPROVED Y. FUJII		PART NAME / 品名 0.5mm PITCH FPC/FFC CONN. RA SMT NON-ZIF TYPE	
								PART NO. / 型番 04 6817 6XX 001 846 +	
								DWG NO. / 図番 BJS 6817004	
								SHEET / REV 1 / 3 J	




ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

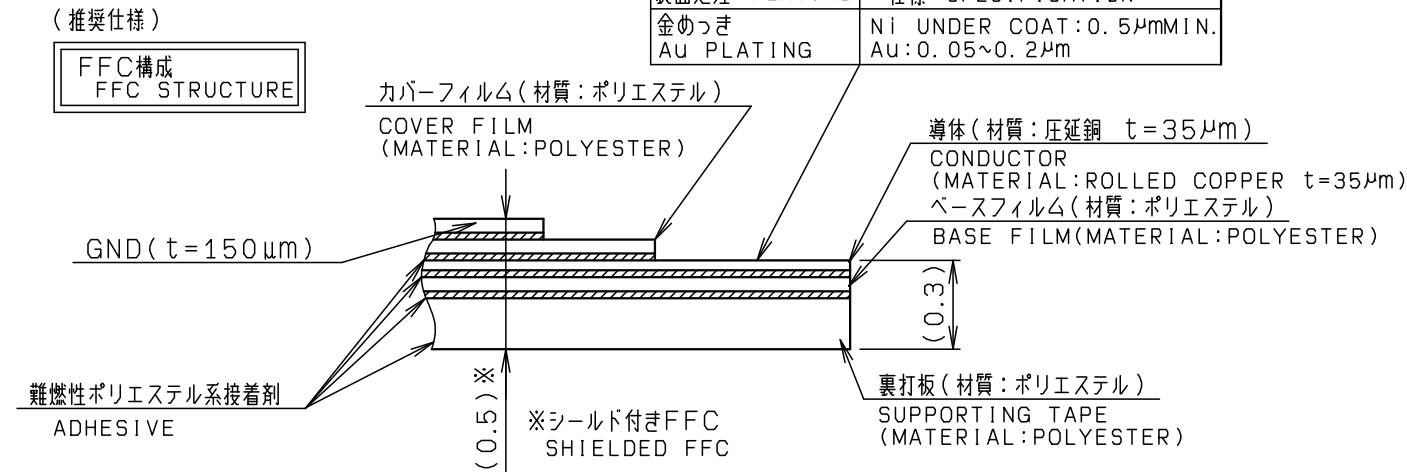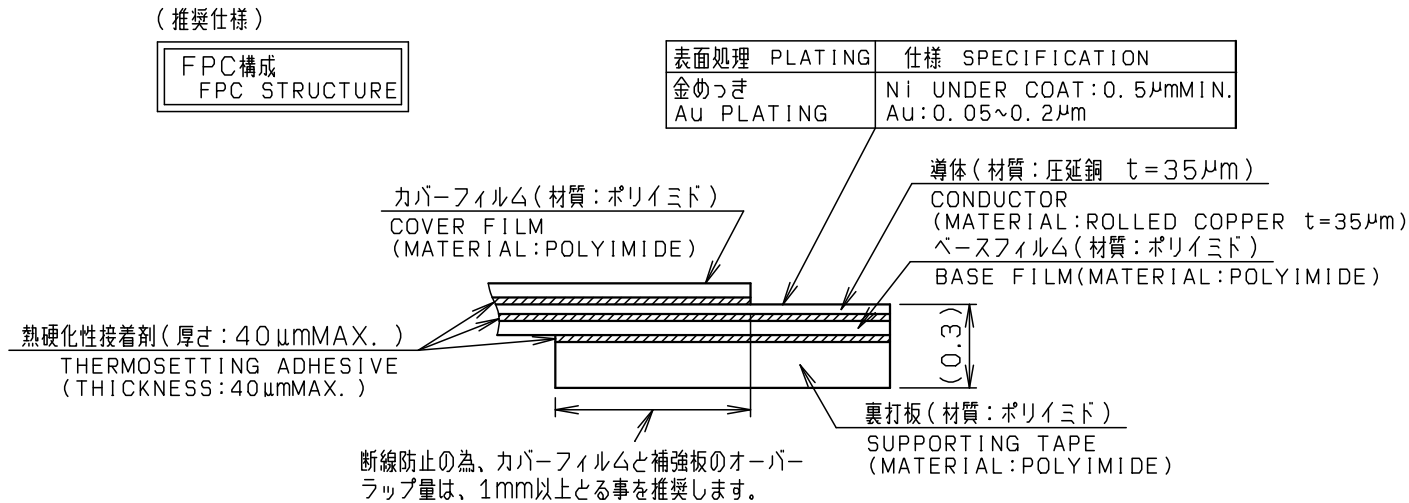

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3	UNIT		ANGLE	REFER		TO SHEET	1/3		
	mm		3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	SCALE		DATE	PART NAME / 品名					
ANGLE / 角度		NJS		0.5mm PITCH FPC/FFC CONN.		RA SMT NON-ZIF TYPE			
±3°		2018/10/16							
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
Y. MANBA	Y. MANBA	N. KITAGAWA	Y. FUJII	04 6817 6XX 001 846 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6817004				2/3 J	

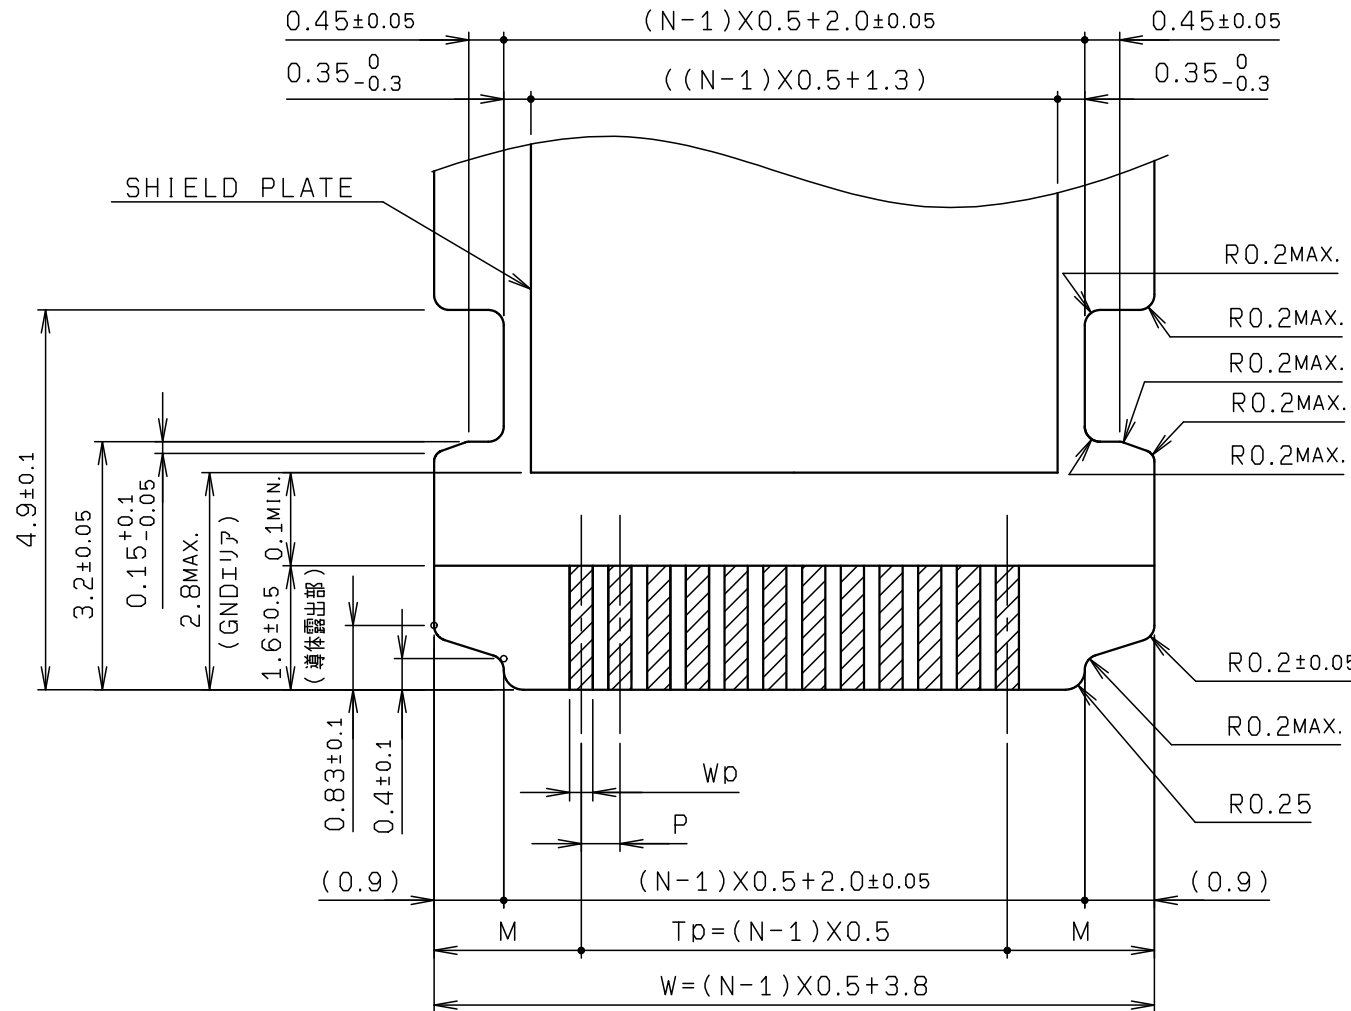

適用FPC/FFC寸法
APPLICABLE FPC/FFC

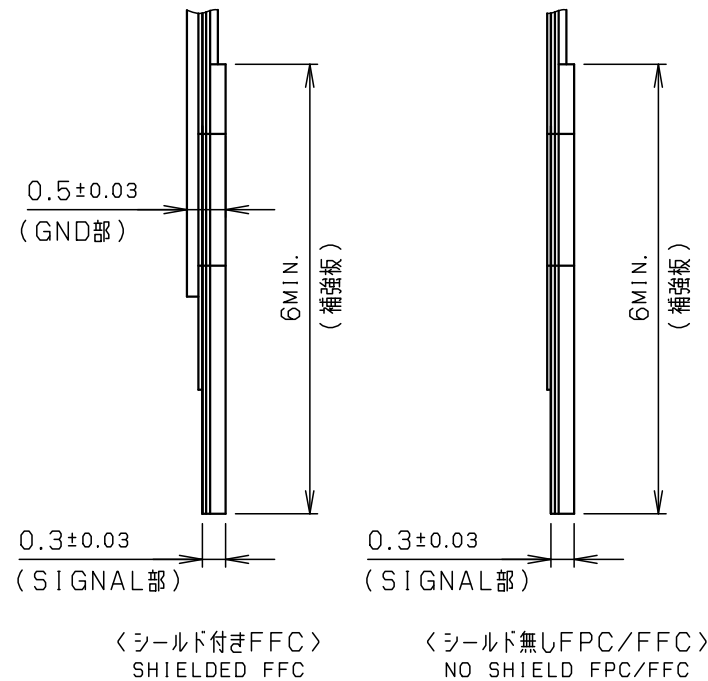


	FPC		FFC	
	1	2	1	2
M	1.9±0.1	1.9±0.07	1.9±0.1	1.9±0.07
P	0.5±0.03	0.5±0.05	0.5±0.03	0.5±0.05
TP	TP±0.03	TP±0.05	TP±0.03	TP±0.05
W	W±0.05	W±0.05	W±0.05	W±0.05
Wp	0.35 ^{+0.02} _{-0.04}	0.35 ^{+0.02} _{-0.04}	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}


※この表は2ページ目にも適用
嵌合するFPC(FFC)が上記FFC(FPC)の寸法/公差であっても嵌合は可能です。
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.
EVEN FPC(FFC) can be mated if it meets the above FFC(FPC) dimensions and tolerances.

- 注 記
NOTE
- 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC FROM 1 OR 2.
 - Nは、極数を示す。
N:NUMBER OF CONTACTS


※この注記は2ページ目にも適用
※THIS NOTES IS APPLICABLE TO SHEET-2 ONLY.

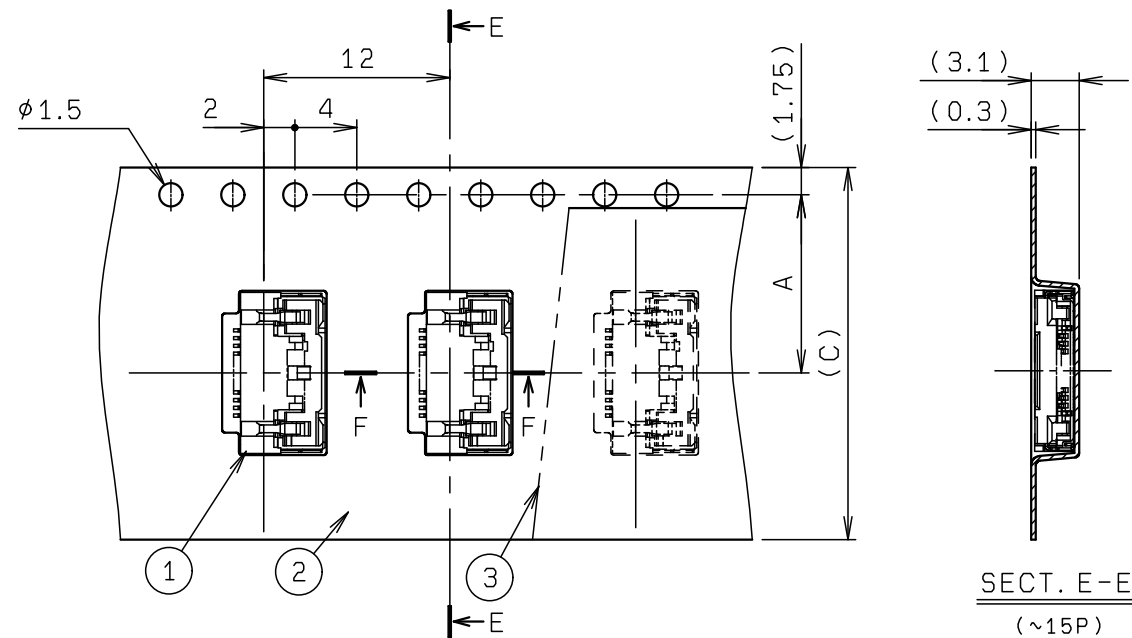

SECT. E-E
(~15P)

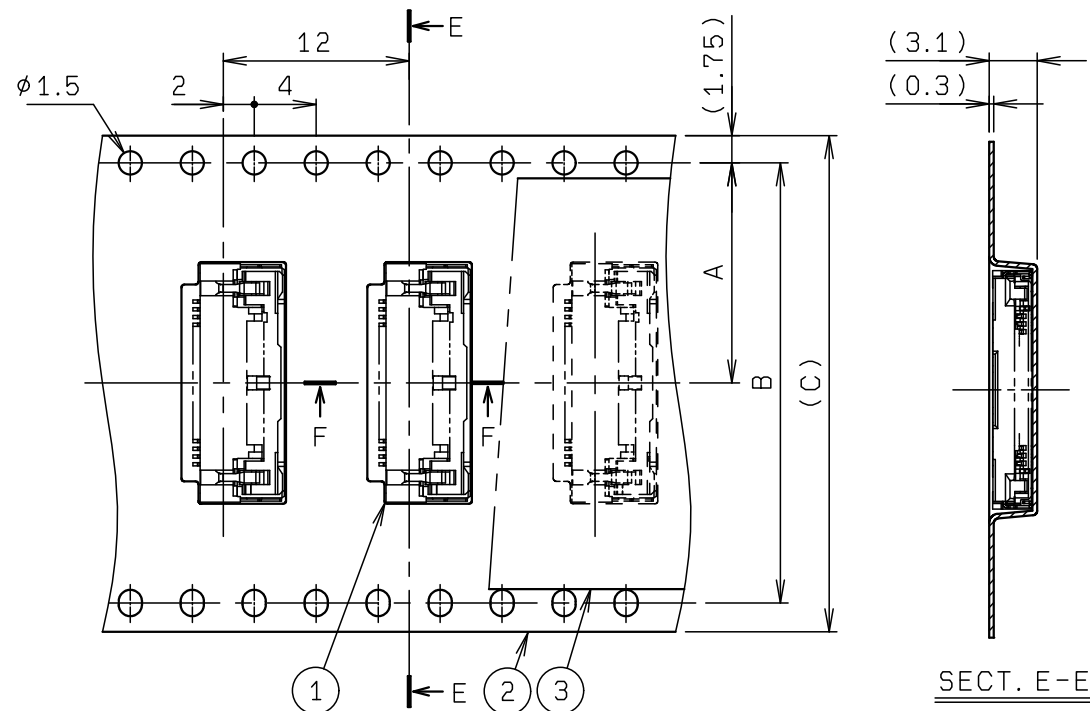

SECT. E-E
(20P~)

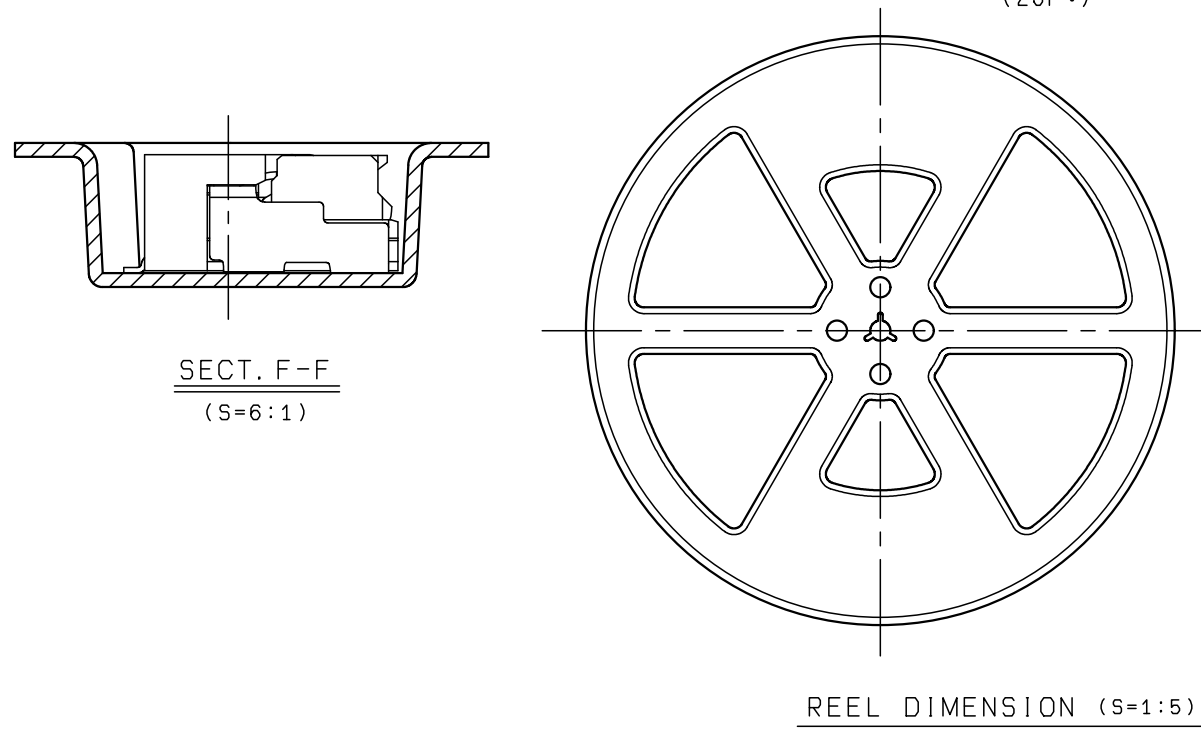

REEL DIMENSION (S=1:5)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6817 6XX 001 846 +	2500			00 6817 6XX 001 846 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
10	11.5	----	24.0	30.4
15	11.5	----	24.0	30.4
20	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	20.2	40.4	44.0	50.4
41	20.2	40.4	44.0	50.4
50	20.2	40.4	44.0	50.4
51	20.2	40.4	44.0	50.4

※この表は3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

注 記
NOTE


1. 梱包数量 : 2500 個/リール
PACKING QUANTITY : 2500 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

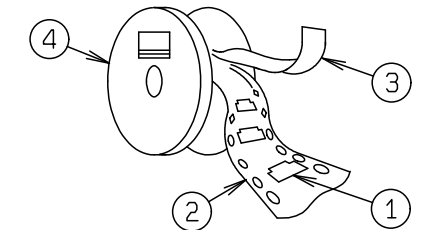

3. 引出し方向

USER DIRECTION OF FEED

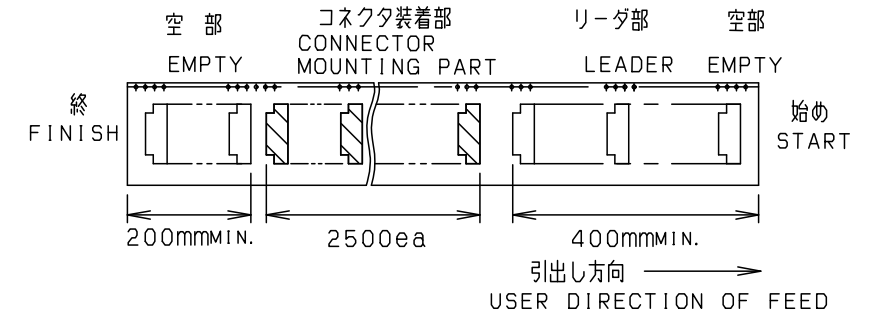

4. 型 番
P/N

04 6817 6XX 001 846 +

極 数
NO. OF POS.

バリエーション
VARIATION
1 : RA TYPE

めっき
PLATING
SIGNAL CONT AU

※この注記の1~3は3ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT		ANGLE	REFER TO SHEET		1/3			
	mm		3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	PART NAME / 品名 EMBOSS TAPE ASSY RA SMT 0.5mm PITCH FPC CONNECTOR								
ANGLE / 角度 ±3°		SCALE NTS	DATE 2018/10/16						
DRAWN Y. MANBA	DESIGNED Y. MANBA	CHECKED N. KITAGAWA	APPROVED Y. FUJII	PART NO. / 型番 04 6817 6XX 001 846 +					
KYOCERA				DWG NO. / 図番 BJS 6817004				SHEET/REV 13/3 J	