

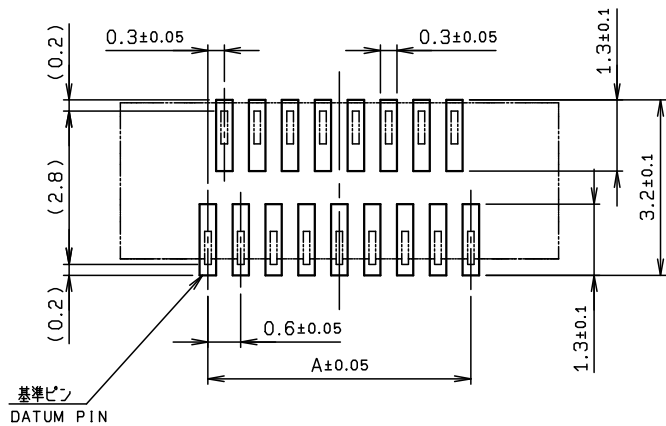
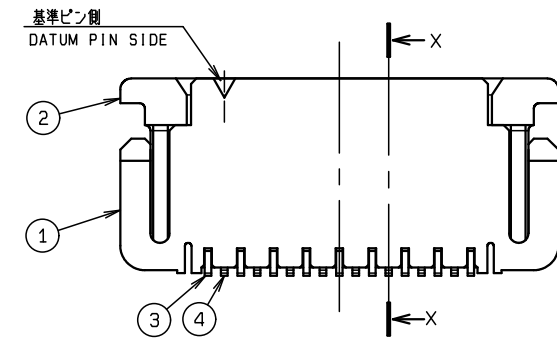
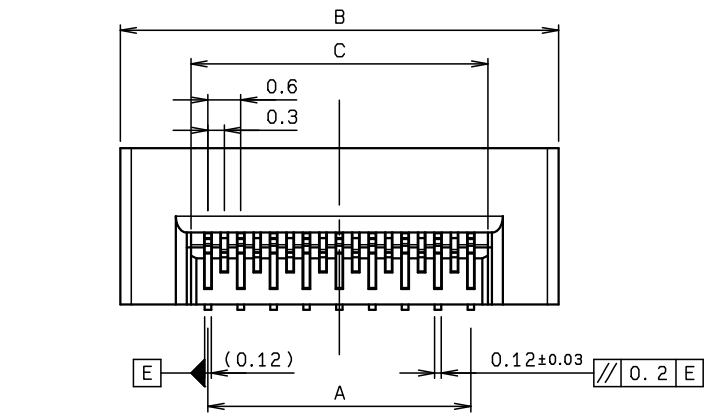


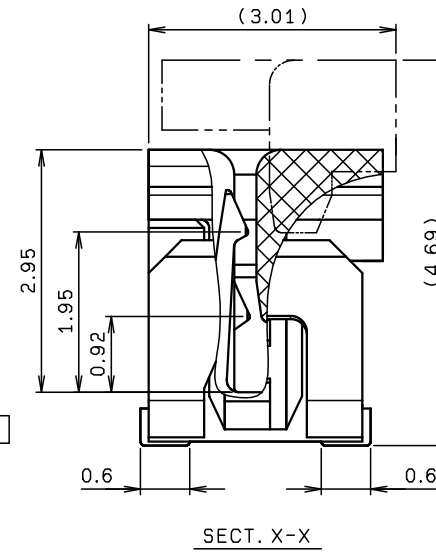

推奨パターン寸法 (コネクタ搭載側)
RECOMMENDED PATTERN LAYOUT

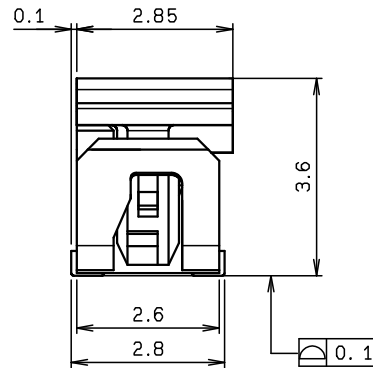

SECT. X-X

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		COLOR: WHITE UL94V-0
2	SLIDER		1	HEAT RESISTING PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT A		$\frac{N+1}{2}$	PHOS-BRONZE		t=0.12 AU PLATING
4	CONTACT B		$\frac{N-1}{2}$	PHOS-BRONZE		t=0.12 AU PLATING



極数 NO. OF POS.	A	B	C
15	4.2	7.4	4.82
17	4.8	8.0	5.42
19	5.4	8.6	6.02
21	6.0	9.2	6.62
23	6.6	9.8	7.22
25	7.2	10.4	7.82
27	7.8	11.0	8.42
29	8.4	11.6	9.02
31	9.0	12.2	9.62
33	9.6	12.8	10.22
35	10.2	13.4	10.82
37	10.8	14.0	11.42
39	11.4	14.6	12.02
41	12.0	15.2	12.62
43	12.6	15.8	13.22
45	13.2	16.4	13.82
47	13.8	17.0	14.42
49	14.4	17.6	15.02
51	15.0	18.2	15.62

※この表は1, 2ページ目だけにのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.



ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN20679	2020/08/06	R. MANABE	N. NAKAJIMA	A. TSUNEMURA
X < 10		±0.2		B	DCN-310	2008/04/21	N. KITAGAWA		T. SATOH
10 ≤ X < 30		±0.25		O	EDN-826	2007/11/29	N. KITAGAWA		T. SATOH
30 ≤ X		±0.3		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		±3°		PART NAME / 品名					
				FPC ASSY ST SMT					
DRAWN		DESIGNED		0.3mm PITCH ZIF TYPE					
N. KITAGAWA		N. KITAGAWA							
CHECKED		APPROVED		PART NO. / 製番					
				04 6841 0XX 100 846 +					
				DWG NO. / 図番					
				BJS 6841003					
				SHEET/REV					
				1/3 C					



KYOCERA

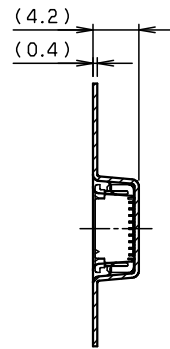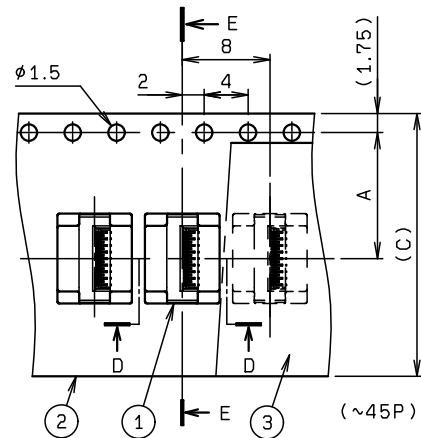


SECT. E-E

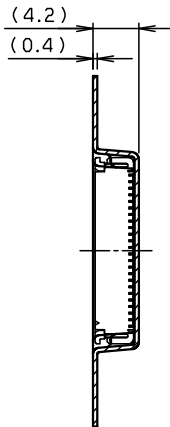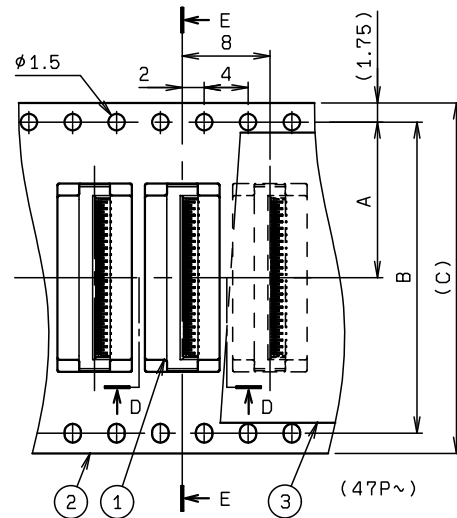

SECT. E-E

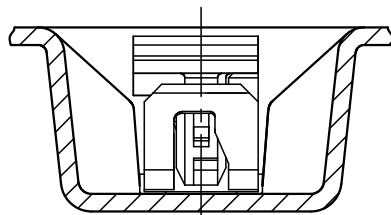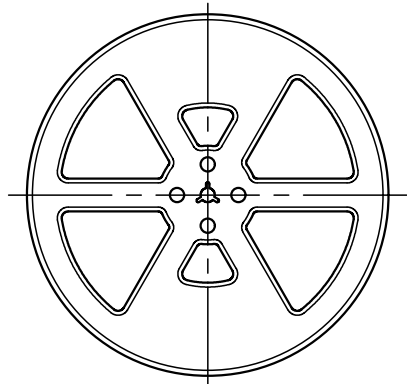SECT. D-D
(S=8:1)

REEL DIMENSION (S=1:5)

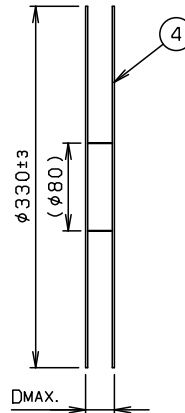

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6841 0XX 100 846 +	2000	—		00 6841 0XX 000 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極数 NO. OF POS.	A	B	C	D
15	7.5	—	16.0	22.4
17	7.5	—	16.0	22.4
19	11.5	—	24.0	30.4
21	↑	—	↑	↑
23	—	—	—	—
25	—	—	—	—
27	—	—	—	—
29	—	—	—	—
31	—	—	—	—
33	—	—	—	—
35	—	—	—	—
37	—	—	—	—
39	—	—	—	—
41	—	—	—	—
43	—	—	—	—
45	11.5	—	24.0	30.4
47	14.2	28.4	32.0	38.4
49	14.2	28.4	32.0	38.4
51	14.2	28.4	32.0	38.4

※この表は3ページ目のみ適用
※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.


注記
NOTE

1. 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

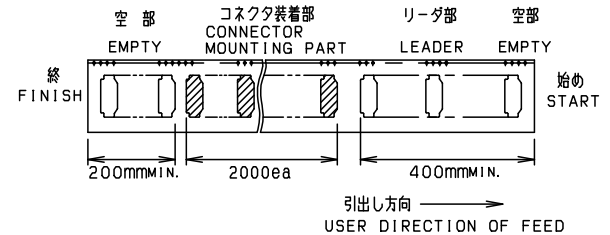

4. 型番
P/N 04 6841 0XX 100 846 +

極数
NO. OF POS.
バリエーション
VARIATION
1: メカチャック タイプ
VACUUMING NOT APPLICABLE

めっきコード
PLATING CODE
846+: Au PLATING (SELECTIVE)

※この注記の1~3は3ページ目のみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-3 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2									
10 ≤ X < 30 ±0.25									
30 ≤ X ±0.3									
ANGLE / 角度 ±3°									
DRAWN N. KITAGAWA		DESIGNED N. KITAGAWA		CHECKED T. SATOH		APPROVED T. SATOH		PART NO. / 型番 04 6841 0XX 100 846 +	
								DWG NO. / 図番 BJS 6841003	
								SHEET/REV 3/3 C	

KYOCERA

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS