

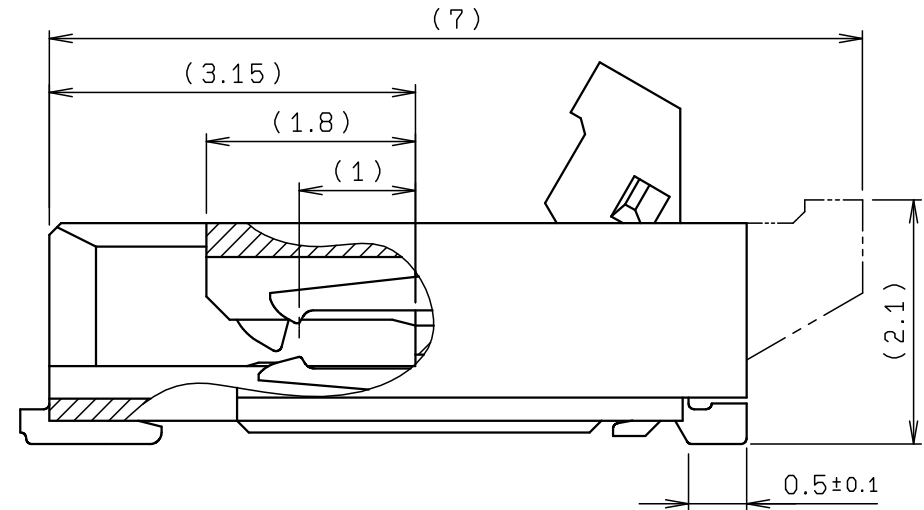
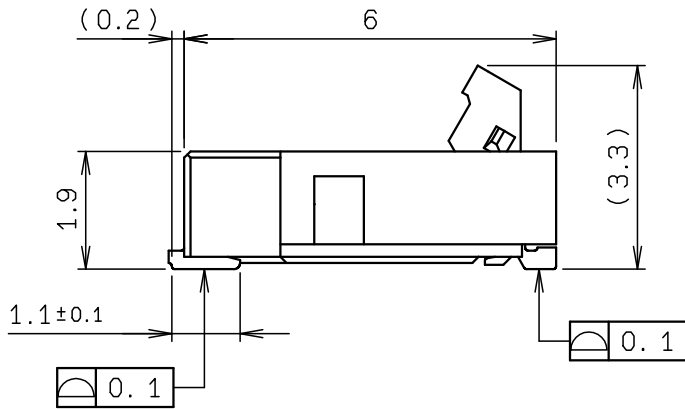


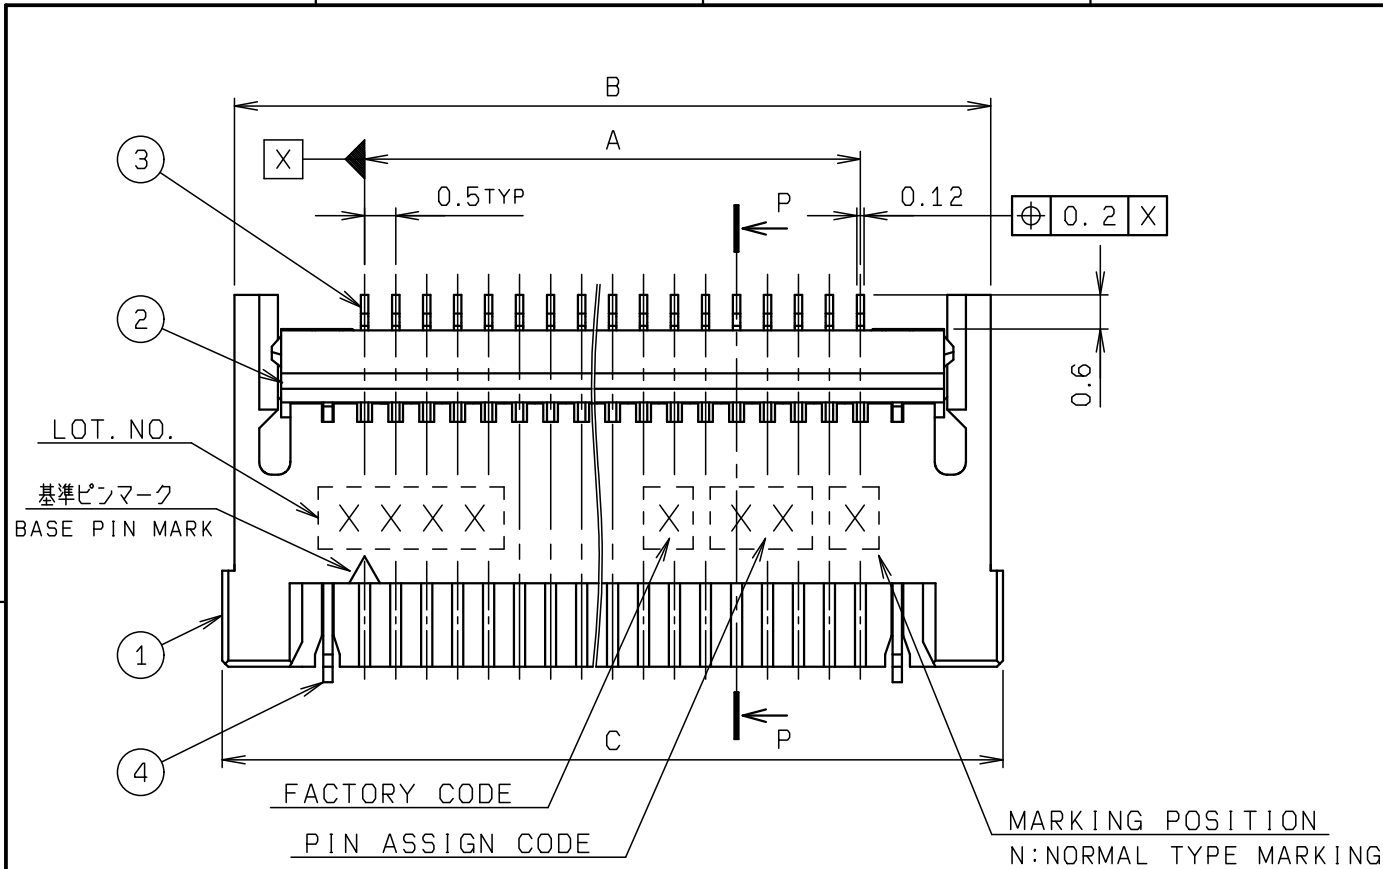

SECT. P-P (S=15:1)

極数 NO. OF POS.	A	B	C	D	E
10	4.5	8.7	9.1	7.2	5.7
24	11.5	15.7	16.1	14.2	12.7
30	14.5	18.7	19.1	17.2	15.7
40	19.5	23.7	24.1	22.2	20.7
41	20.0	24.2	24.6	22.7	21.2
50	24.5	28.7	29.1	27.2	25.7
51	25.0	29.2	29.6	27.7	26.2
61	30.0	34.2	34.6	32.7	31.2

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

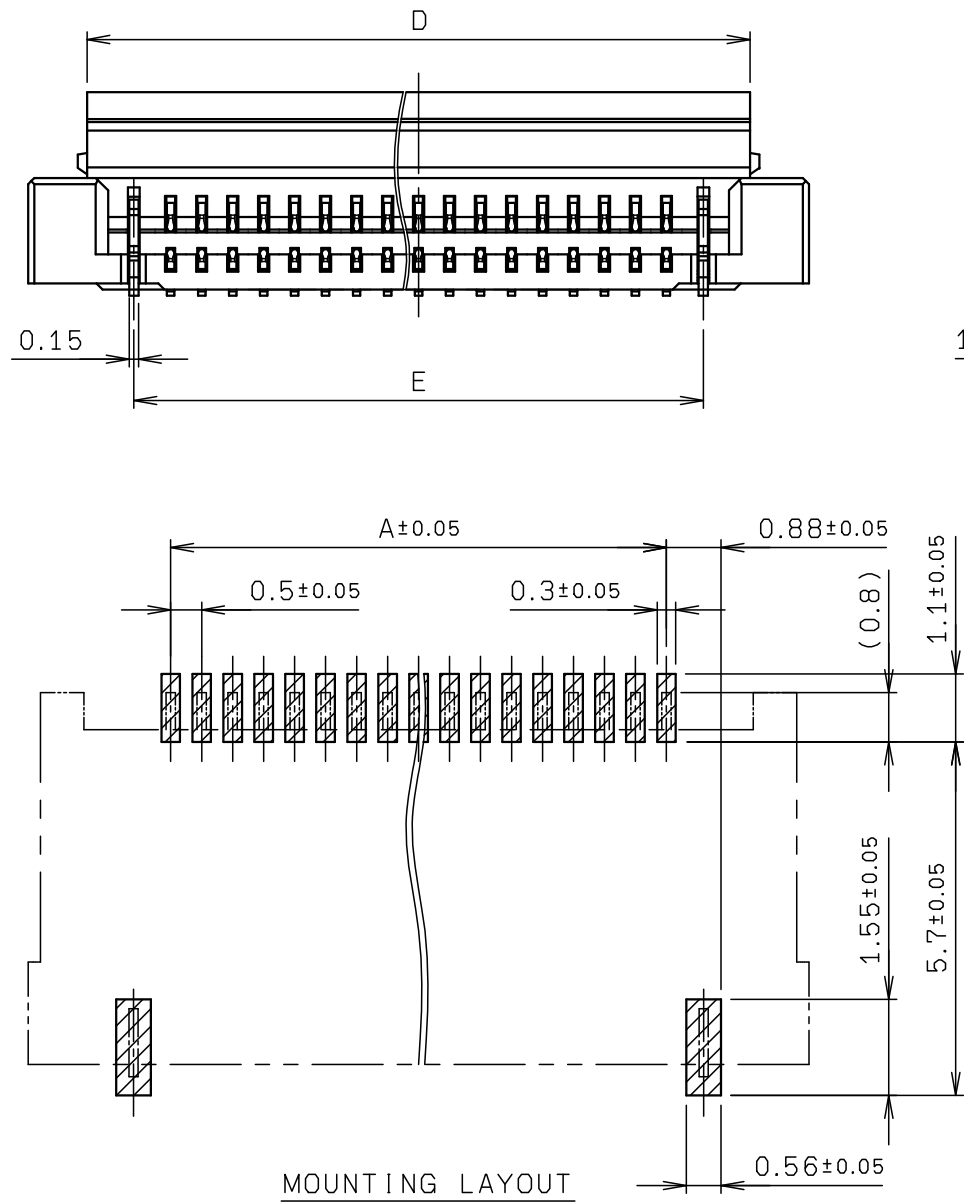

MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		COLOR: WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		COLOR: BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.12 AU PLATING
4	ANCHOR LOCK		2	SUS		t=0.15 AU PLATING

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格					
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		A EDN24449 2024/07/04 Y. TSURUOKA	
ANGLE / 角度 ±3°		SCALE 8 : 1		DATE 2023/03/29		O EDN23061 2023/03/29 N. KITAGAWA	
DRAWN M. TAKAHASHI		DESIGNED N. KITAGAWA		CHECKED		APPROVED N. NAKAJIMA	
						PART NAME / 品名	
						SERIES 6882 0.5mm PITCH FPC/FFC CONN. ASSY	
						RA SMT DUAL CONTACT	
						PART NO. / 型番	
						04 6882 1XX 399 846 +	
						DWG NO. / 図番	
						BJS 6882028	
						SHEET/REV	
						1/3 A	





© 2024 KYOCERA Corporation

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

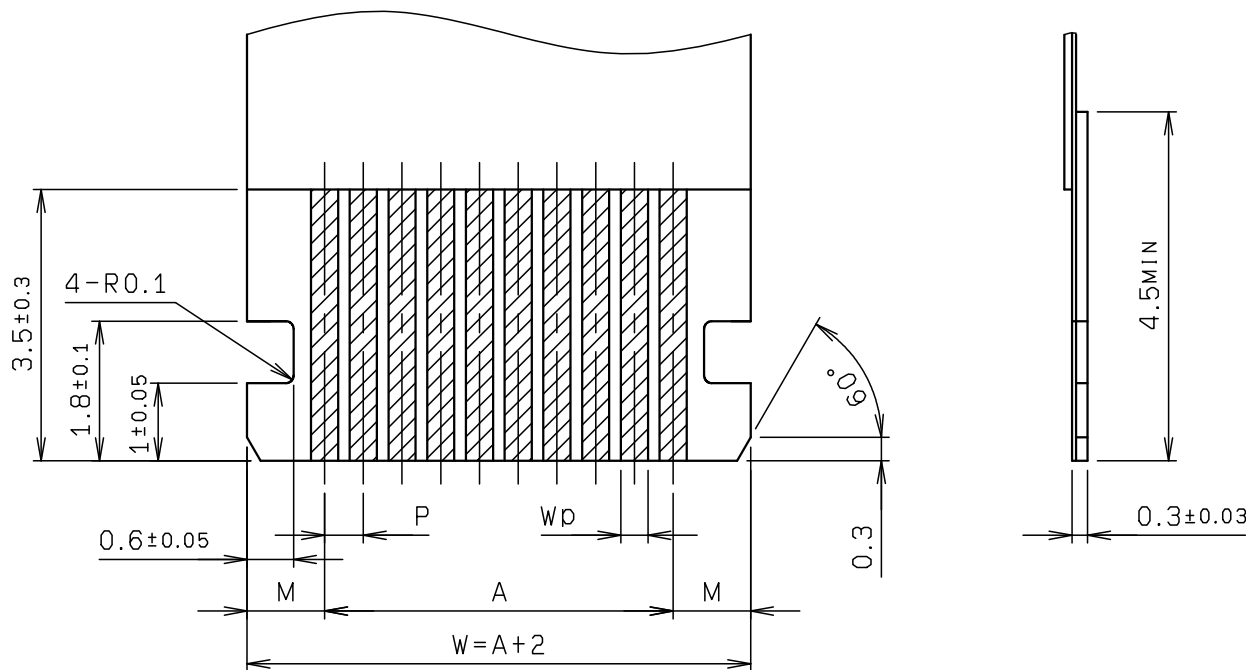

	FPC/FFC	
	1	2
M	1.0±0.1	1.0±0.08
P	0.5±0.03	0.5±0.05
A	A±0.03	A±0.05
W	W±0.07	W±0.07
Wp	0.3 ^{+0.05} _{-0.02}	0.3 ^{+0.05} _{-0.02}

適合FPC/FFC寸法
APPLICABLE FPC/FFC


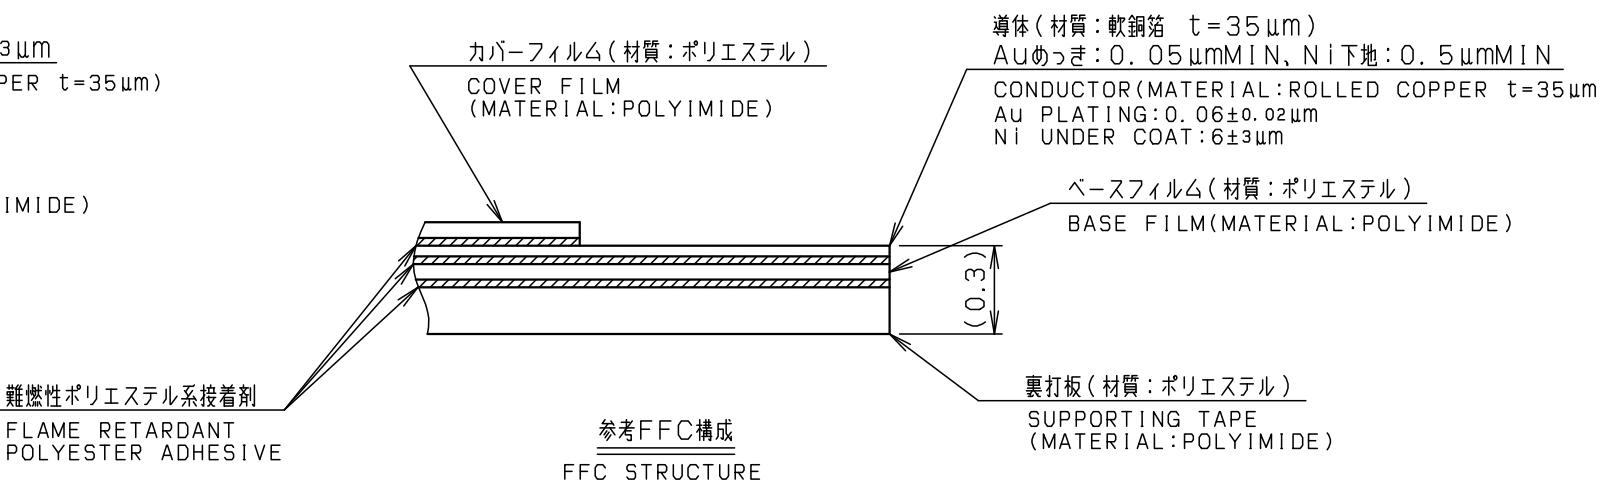
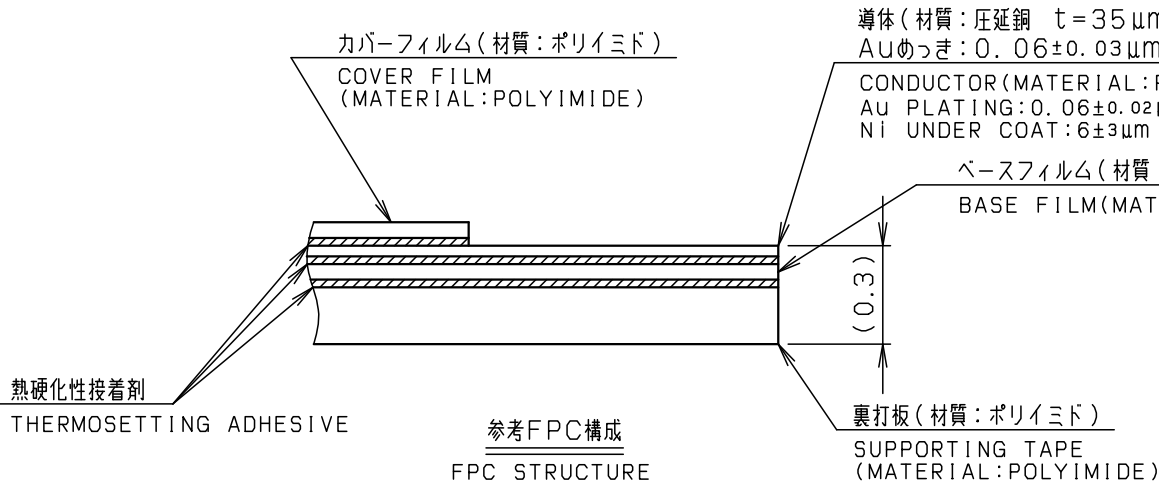


注 記
NOTE
① 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC FROM 1 OR 2.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET		1/3	
10 ≤ X < 30 ±0.25		mm		3RD		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		SCALE		DATE		PART NAME / 品名			
ANGLE / 角度		NJS		2023/03/29		SERIES 6882 0.5mm PITCH FPC/FFC CONN. ASSY			
±3°		DRAWN		DESIGNED		RA SMT DUAL CONTACT			
M. TAKAHASHI		N. KITAGAWA		CHECKED		PART NO. / 型番			
				APPROVED		04 6882 1XX 399 846 +			
						DWG NO. / 図番			
						BJS 6882028			
						SHEET / REV			
						12/3 A			


KYOCERA

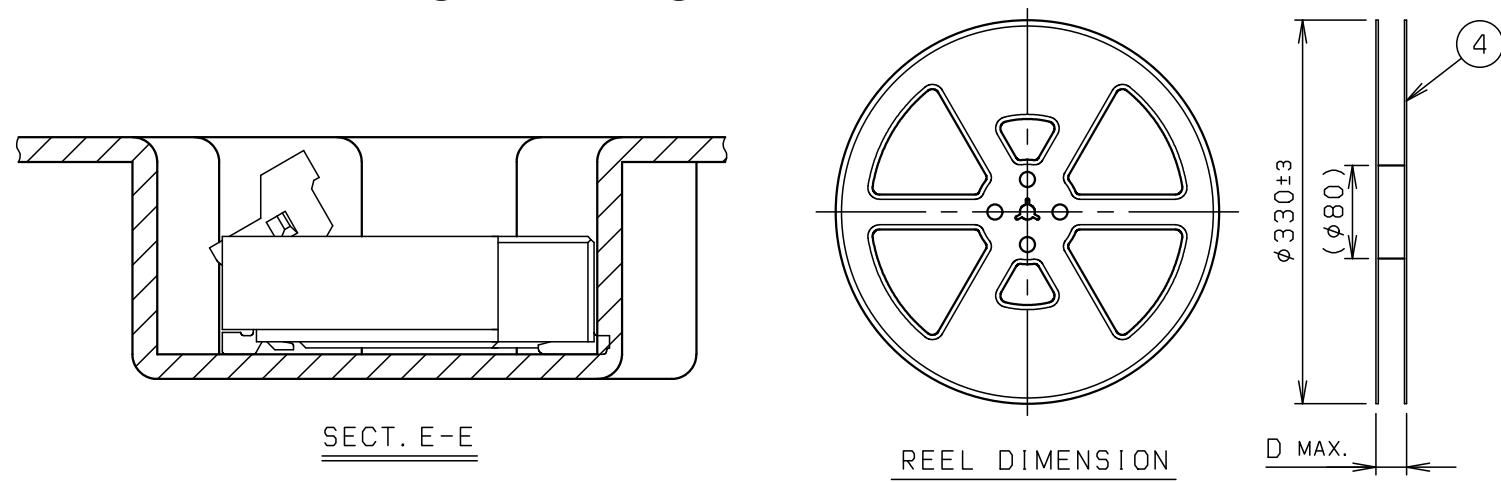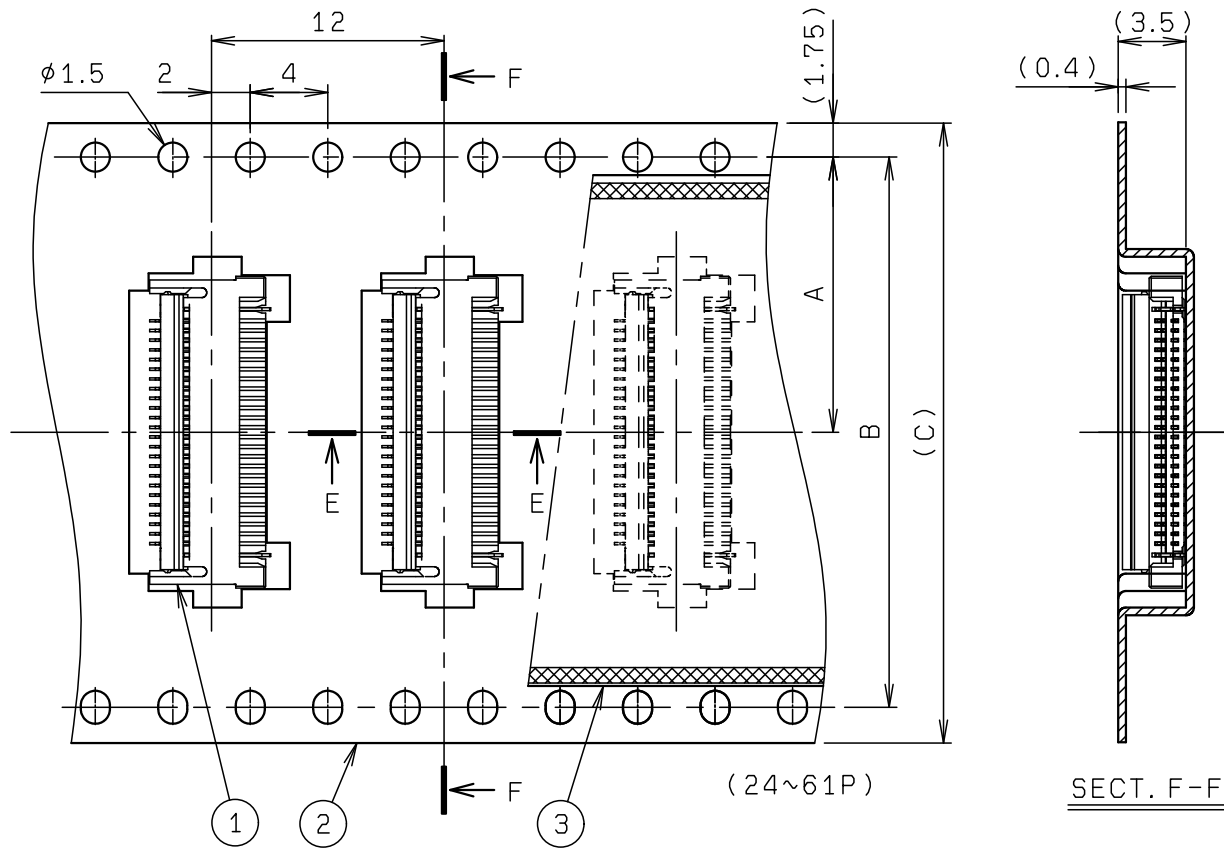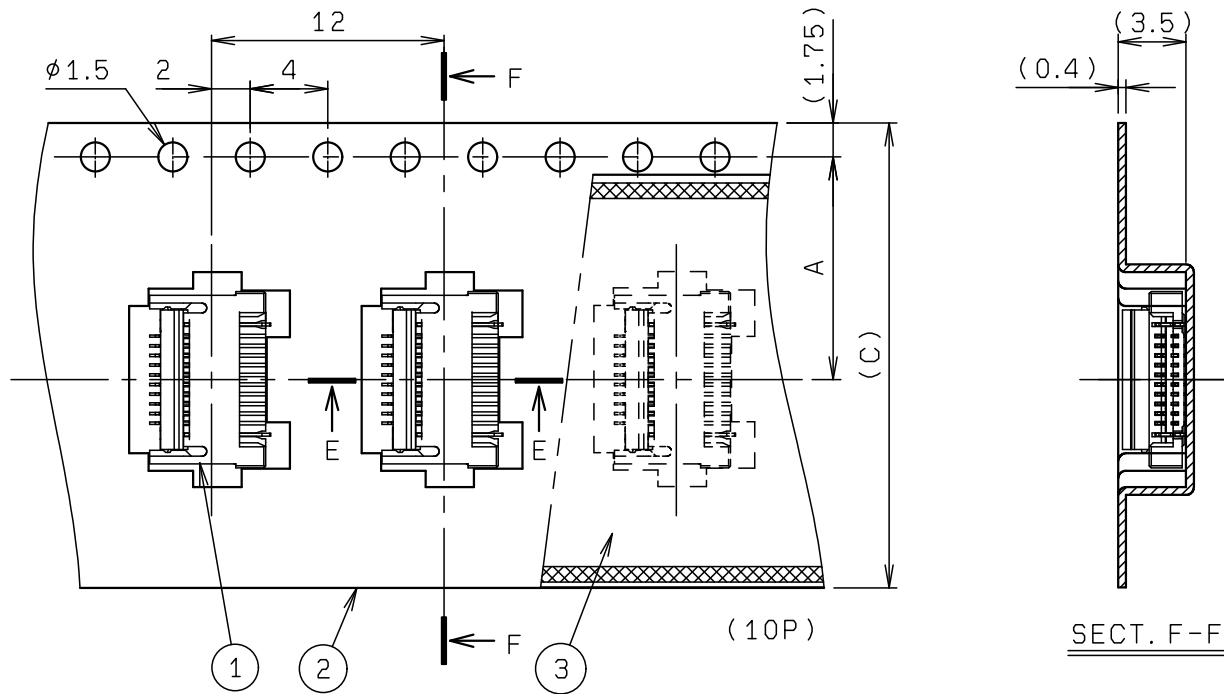

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6882 1XX 399 846 +	1000	—		00 6882 1XX 399 846 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

- 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

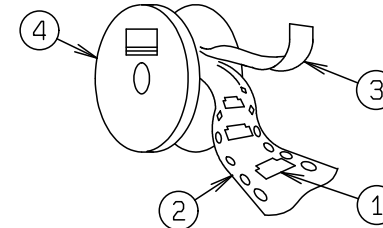

- 引出し方向

USER DIRECTION OF FEED

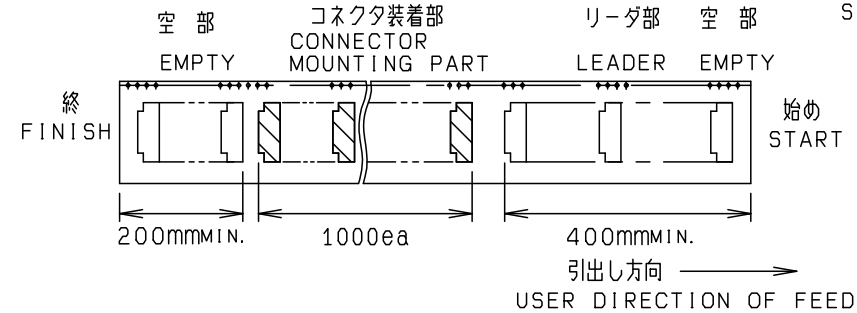

- 型 番
P/N

04 6882 1XX 399 846 +

バリエーション
VARIATION

極 数
NO. OF POS.

上下両接点タイプ
DUAL CONTACT TYPE

※この注記の1~3は3ページ目にも適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極 数 NO. OF POS.	A	B	C	D
10	11.5	—	24.0	30.4
24	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	20.2	40.4	44.0	50.4
41	20.2	40.4	44.0	50.4
50	20.2	40.4	44.0	50.4
51	20.2	40.4	44.0	50.4
61	26.2	52.4	56.0	62.4

※この表は3ページ目にも適用

※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格			
X < 10 ±0.2		POLYSTYRENE (CLEAR)			
10 ≤ X < 30 ±0.25		UNIT	ANGLE	REFER TO SHEET 1/3	
30 ≤ X ±0.3		mm	3RD		
ANGLE / 角度 ±3°		SCALE	DATE	PART NAME / 品名	
		NTS	2023/03/29	SERIES 6882 0.5mm PITCH FPC/FFC EMBOSS ASSY	
DRAWN M. TAKAHASHI		DESIGNED N. KITAGAWA	CHECKED	RA SMT DUAL CONTACT	
			APPROVED N. NAKAJIMA	PART NO. / 型番	
		DWG NO. / 図番		04 6882 1XX 399 846 +	
				BJS 6882028	
				SHEET REV	
				13/3 A	

KYOCERA