



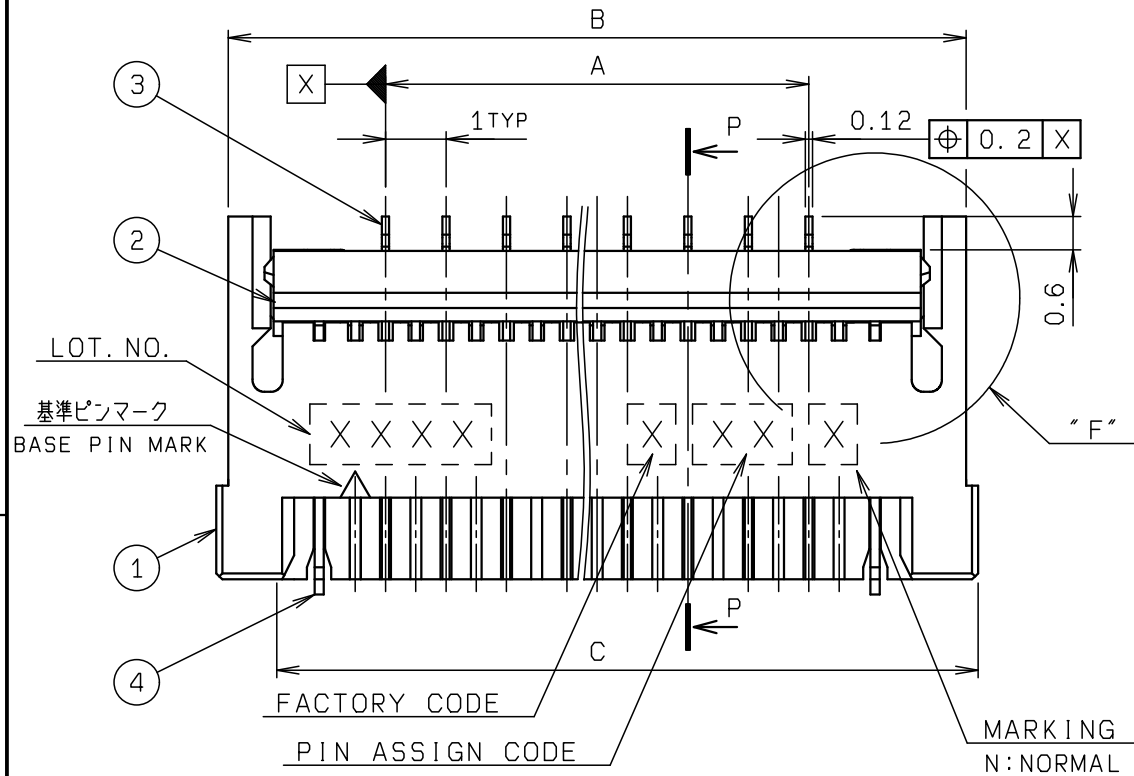




テール防塵機能なし
WITHOUT TAIL DUST COVER
04 6882 4XX 399 846 +

テール防塵機能あり
WITH TAIL DUST COVER
04 6882 5XX 399 846 +

DETAIL "F"

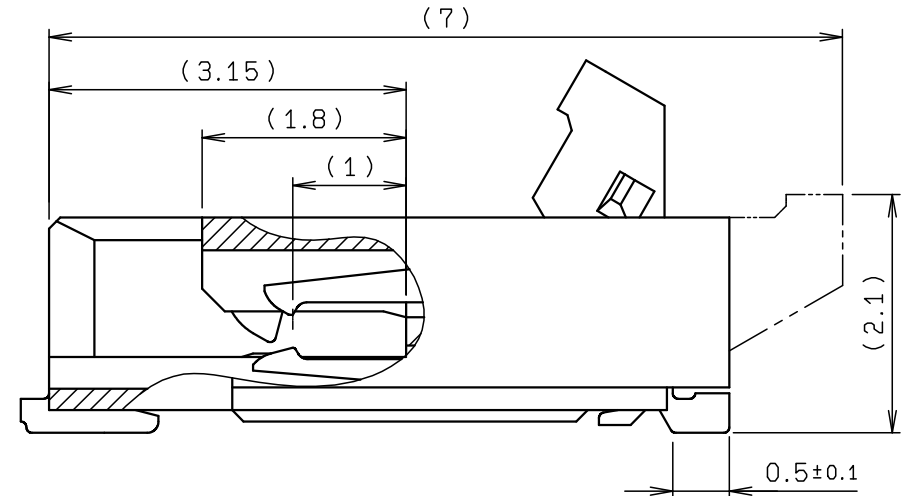

SECT. P-P (S=15:1)

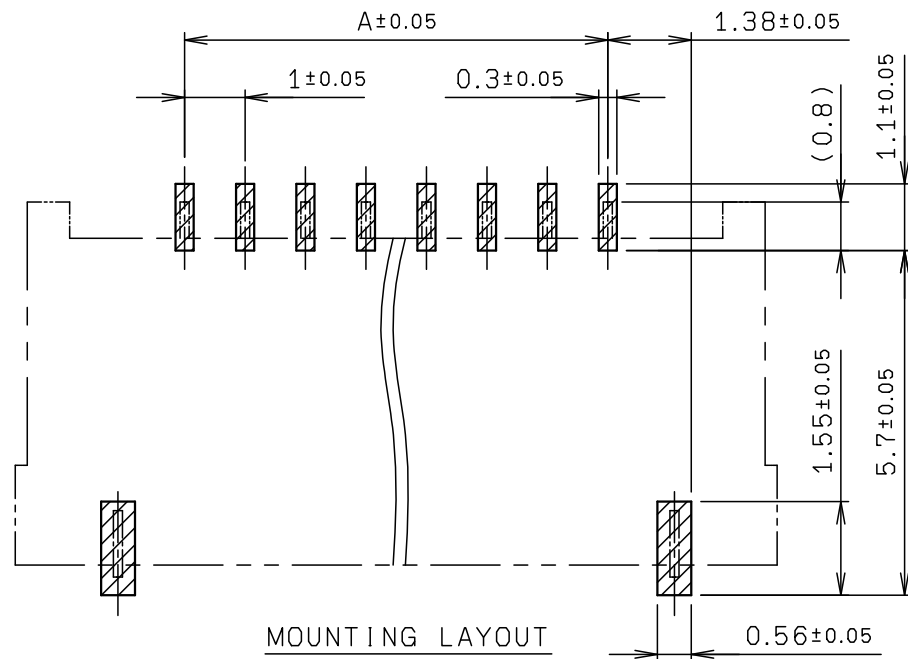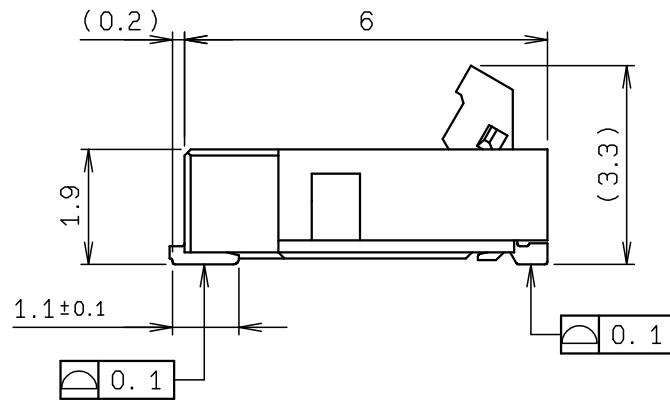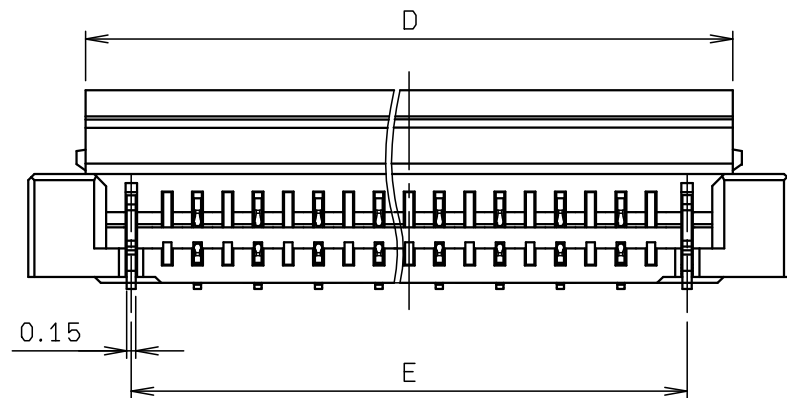

MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		COLOR:WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTING RESIN		COLOR:BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.12 AU PLATING
4	ANCHOR LOCK		2	SUS		t=0.15 AU PLATING


極数 NO. OF POS.	A	B	C	D	E
20	19.0	24.2	24.6	22.7	21.2
25	24.0	29.2	29.6	27.7	26.2
30	29.0	34.2	34.6	32.7	31.2

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		SCALE 8 : 1		DATE 2023/08/03	
ANGLE / 角度 ±3°		DRAWN M. TAKAHASHI		DESIGNED S. MORITA		CHECKED N. NAKAJIMA		APPROVED N. NAKAJIMA	
		PART NO. / 型番 04 6882 XXX 399 846 +		DWG NO. / 図番 BJS 6882029		SHEET REV 1/3 0			

KYOCERA


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

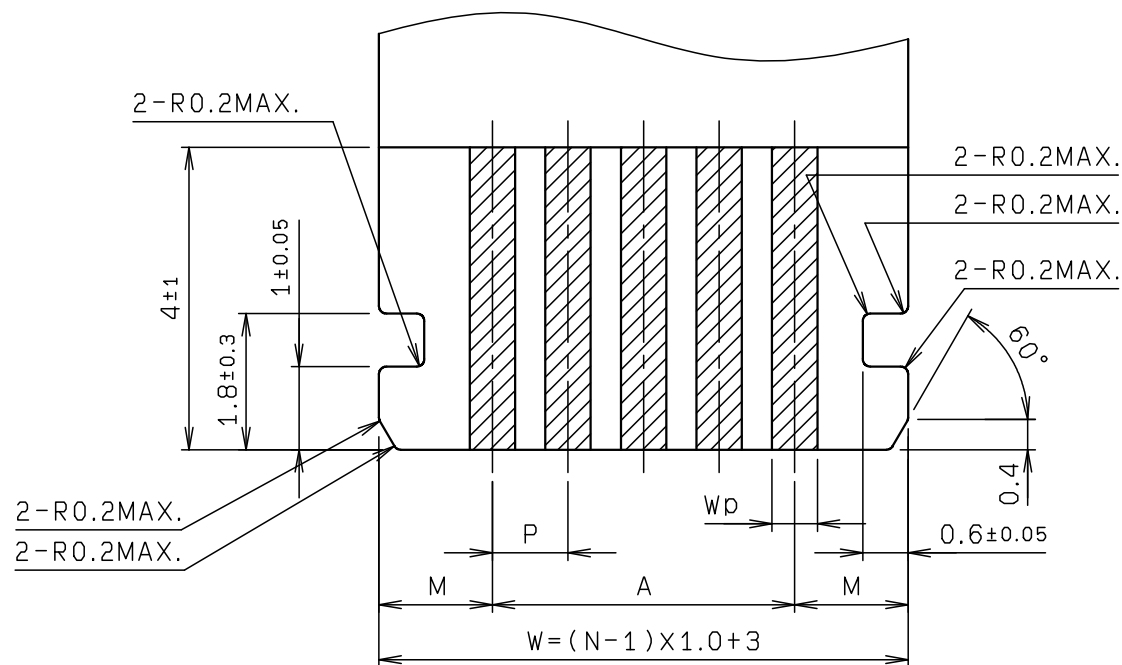


適合FPC/FFC寸法

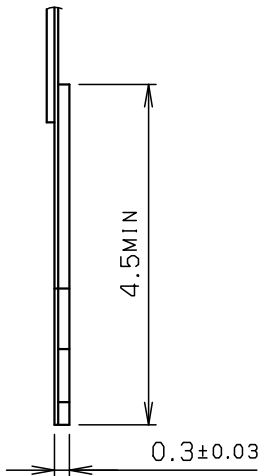

	FPC/FFC
M	1.5±0.08
P	1.0±0.05
A	A±0.1
W	W±0.05
Wp	0.6±0.03

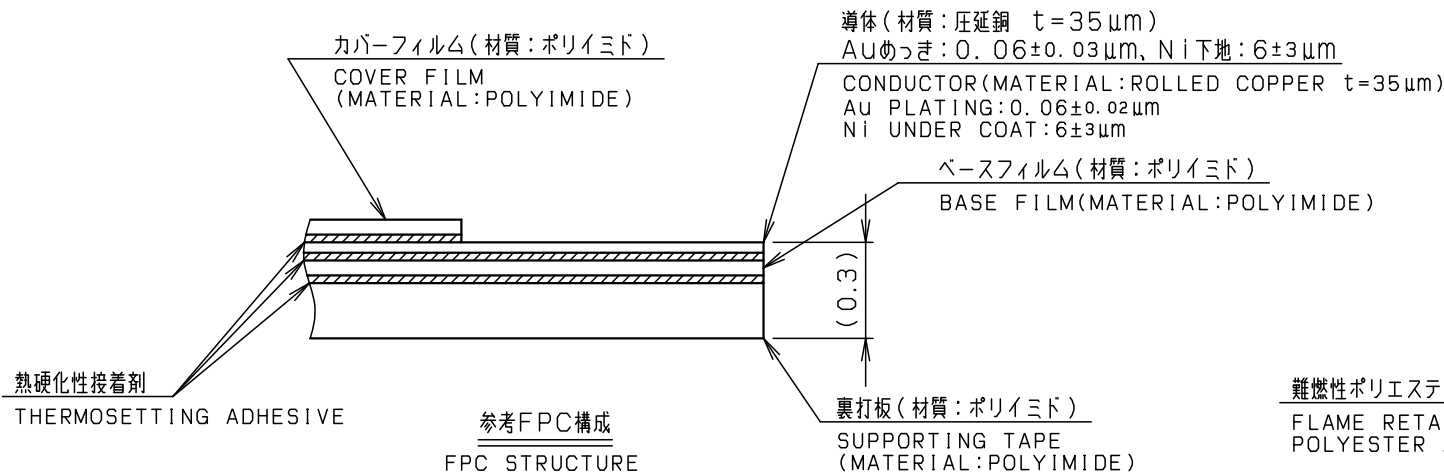

参考FPC構成
FPC STRUCTURE

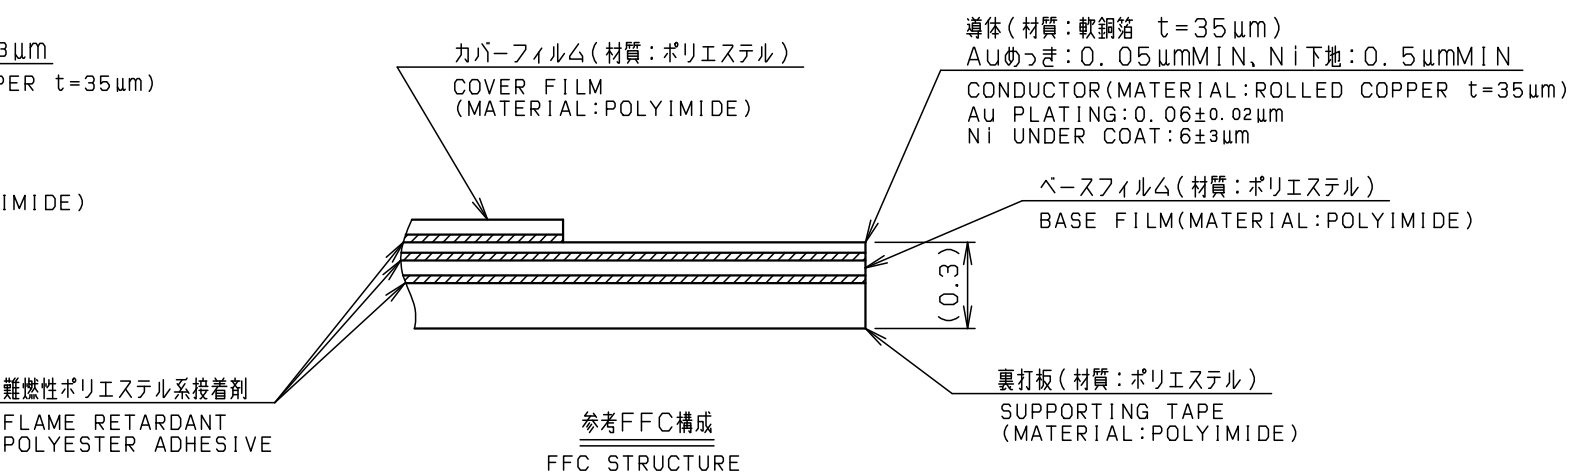




参考FFC構成
FFC STRUCTURE

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2									
10 ≤ X < 30 ±0.25		UNIT		ANGLE		REFER TO SHEET		1/3	
30 ≤ X ±0.3		mm		3RD		NO.		EDN/DCN	
ANGLE / 角度		SCALE		DATE		DATE		ISSUE	
±3°		NTS		2023/08/03		CHECKED		APPROVED	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NAME / 品名	
M. TAKAHASHI		S. MORITA				N. NAKAJIMA		SERIES 6882 1.0mm PITCH FPC/FFC CONN. ASSY	
								RA SMT DUAL CONTACT	
								PART NO. / 型番	
								04 6882 XXX 399 846 +	
								DWG NO. / 図番	
								BUS 6882029	
								SHEET/REV	
								2/3 0	




F
E
D
C
B
A

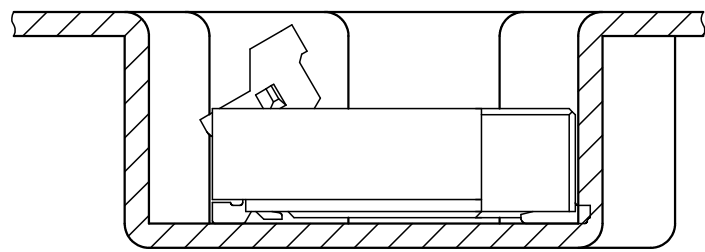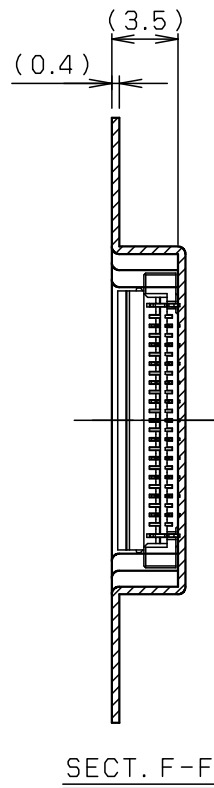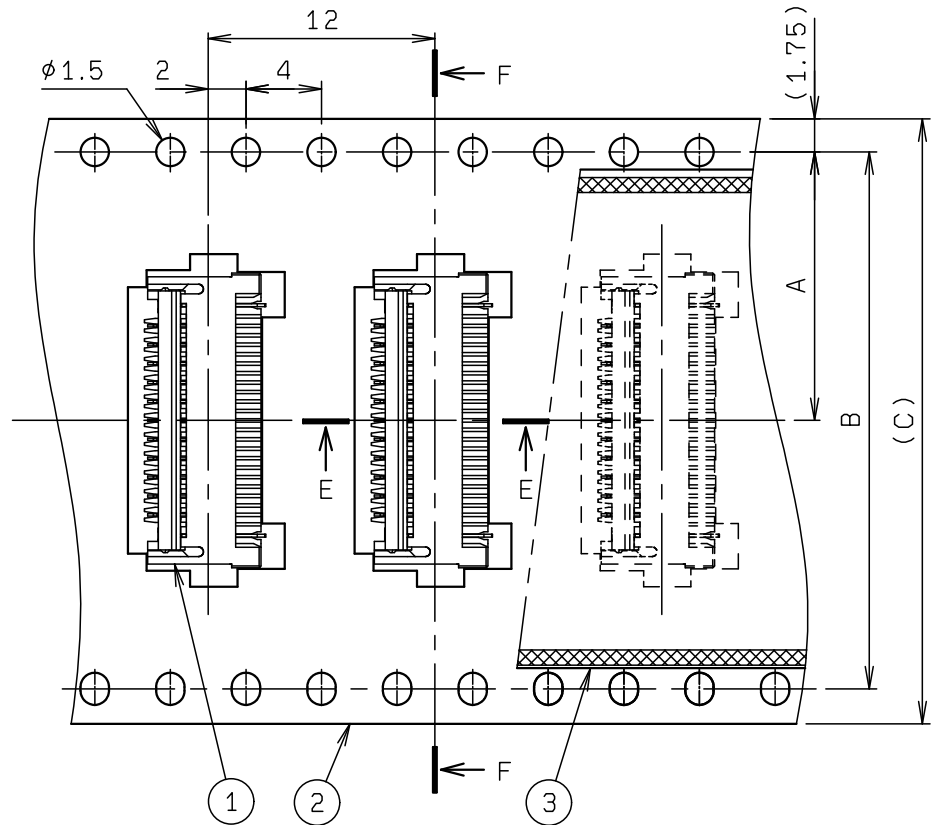

SECT. E-E

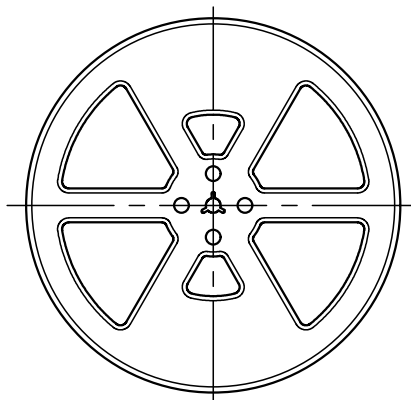


REEL DIMENSION

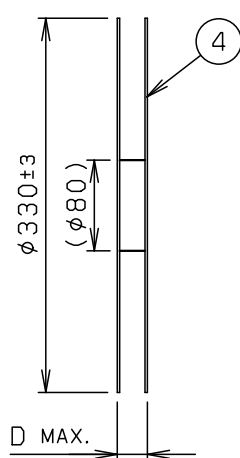

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6882 XXX 399 846 +	1000	—		00 6882 XXX 399 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

- 梱包数量 : 1000 個/リール
PACKING QUANTITY : 1000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

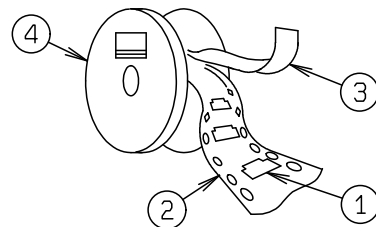

3. 引出し方向

USER DIRECTION OF FEED

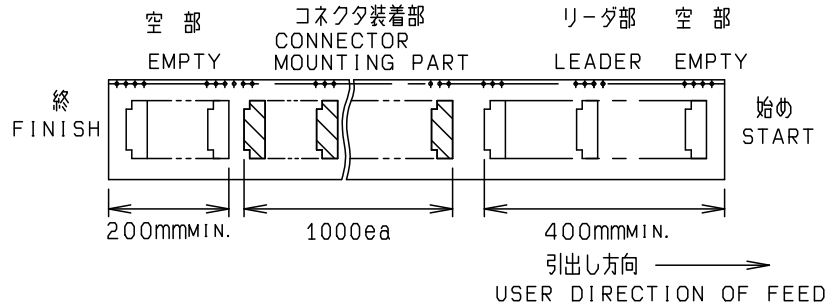

4. 型 番
P/N

04 6882 XXX 399 846 +

バリエーション
VARIATION

1. 0mm PITCH, テール防塵機能なし
1. 0mm PITCH/
WITHOUT TAIL DUST COVER
- 5: 1. 0mm PITCH, テール防塵機能あり
1. 0mm PITCH/
WITH TAIL DUST COVER

極 数

NO. OF POS.

上下両接点タイプ

DUAL CONTACT TYPE

※この注記の1～3は3ページ目にも適用

※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

極 数 NO. OF POS.	A	B	C	D
20	20.2	40.4	44.0	50.4
25	20.2	40.4	44.0	50.4
30	26.2	52.4	56.0	62.4

※この表は3ページ目にも適用

※THIS CHART IS APPLICABLE TO
SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		POLYSTYRENE (CLEAR)							
10 ≤ X < 30 ±0.25		UNIT	ANGLE	REFER TO SHEET		1/3			
30 ≤ X ±0.3		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		SCALE	DATE	PART NAME / 品名					
±3°		NTS	2023/08/03	SERIES 6882 1.0mm PITCH FPC/FFC EMBOSS ASSY RA SMT DUAL CONTACT					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
M. TAKAHASHI	S. MORITA		N. NAKAJIMA	04 6882 XXX 399 846 +					
DWG NO. / 図番				SHEET/REV					
BJS 6882029				13/3				0	

KYOCERA