



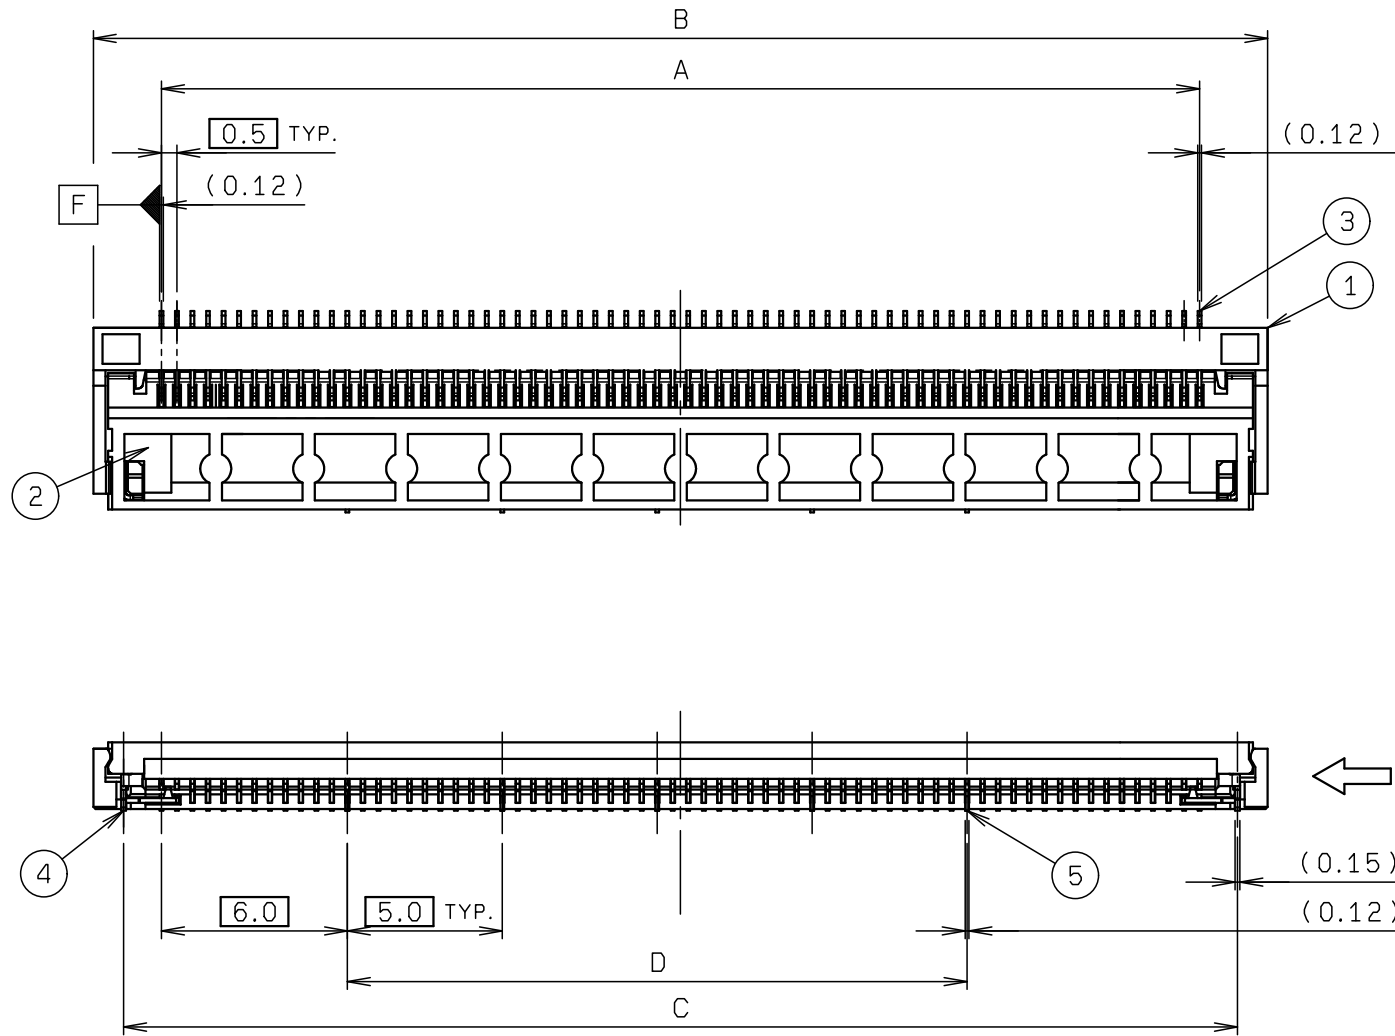

推奨パターン寸法
RECOMMENDED PATTERN LAYOUT


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0.12 AU PLATING
4	ANCHOR PLATE 1 (WITH GND POINT)		2	PHOS-BRONZE		t=0.15 Sn-Cu PLATING
5	ANCHOR PLATE 2		N/10-1	PHOS-BRONZE		t=0.12 Sn-Cu PLATING

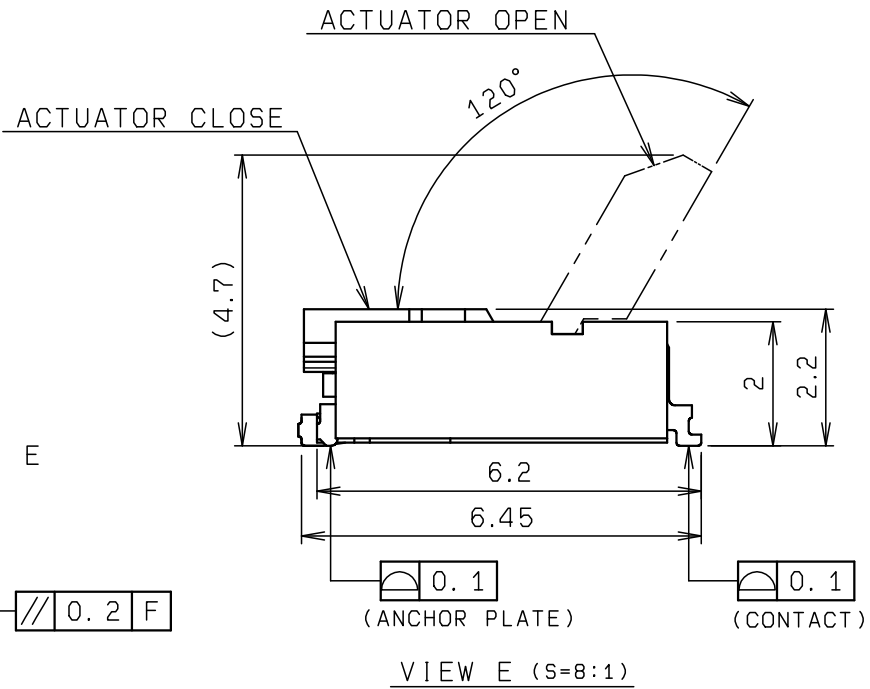

極数 NO. OF POS.	A	B	C	D
30	14.5	18.9	16.95	5.0
40	19.5	23.9	21.95	10.0
45	22.0	26.4	24.45	10.0
50	24.5	28.9	26.95	15.0
68	33.5	37.9	35.95	20.0

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

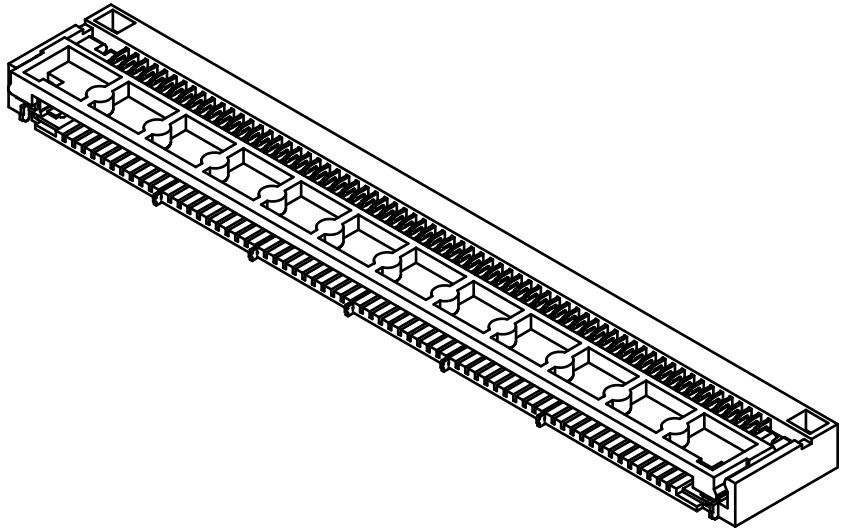


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		F	DCN23454	2023/11/22	S. MORITA		Y. TSURUOKA
X < 10 ±0.2				E	DCN23180	2023/05/08	N. KITAGAWA		N. NAKAJIMA
10 ≤ X < 30 ±0.25				O	EDN-119	2017/03/10	N. KITAGAWA	F. IKEGAMI	Y. FUJII
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		UNIT mm		SCALE 4 : 1		DATE 2017/03/10		PART NAME / 品名	
								FPC/FFC ASSY RA SMT	
DRAWN N. KITAGAWA		DESIGNED N. KITAGAWA		CHECKED F. IKEGAMI		APPROVED Y. FUJII		PART NO. / 型番	
								04 6892 6XX 101 846 +	
								DWG NO. / 図番	
								BJS 6892006	
								SHEET / REV	
								1 / 3 F	



© 2023 KYOCERA Corporation

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

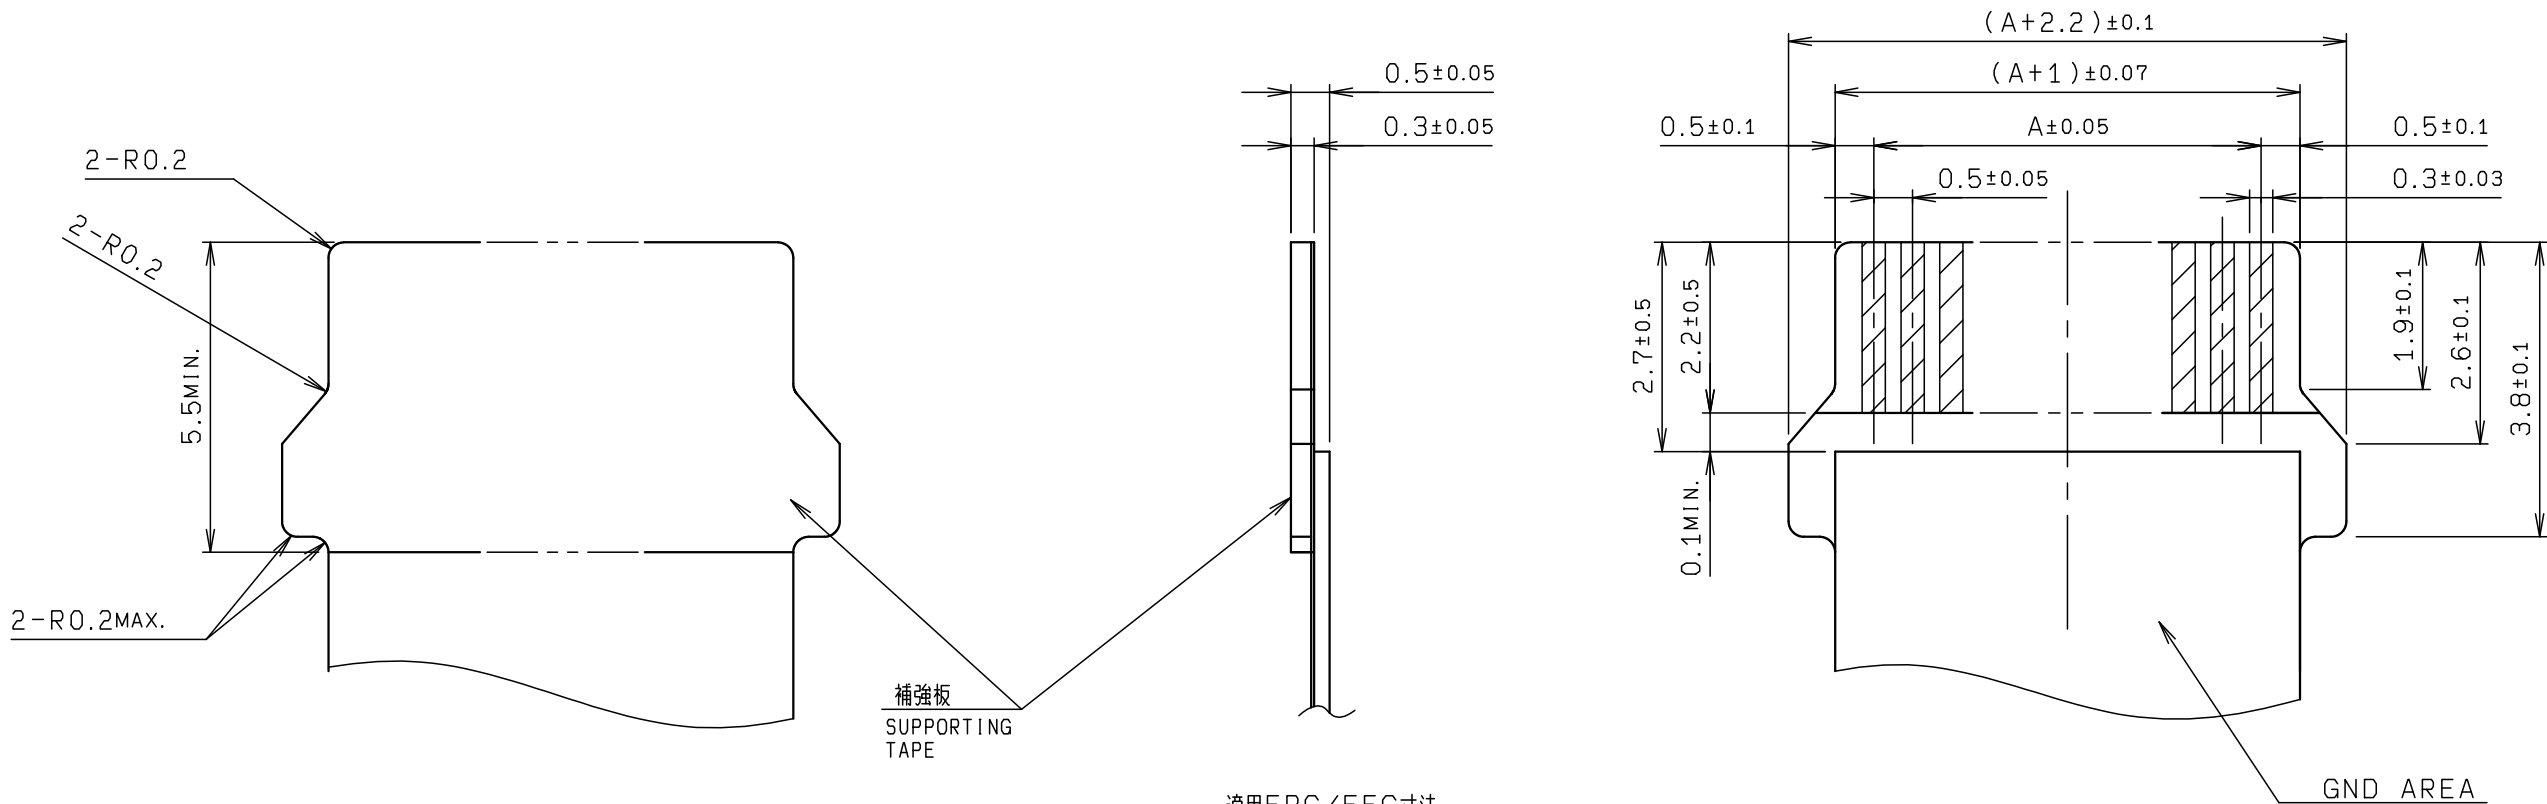

注 記
NOTE

1. コンタクトテール及び固定金具は、
基板より最大浮き0.1mmとする。
FLOATING FROM BOARD OF
CONTACT TAIL AND ANCHOR PLATE
SHALL BE 0.1mmMAX.


2. Nは、極数を示す。
N MEANS NUMBER OF PINS.

※この注記は1，2ページ目にのみ適用
※THIS NOTE IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

(推奨仕様)

FFC構成 FFC STRUCTURE



表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT:0.5μmMIN. AU:0.05~0.2μm

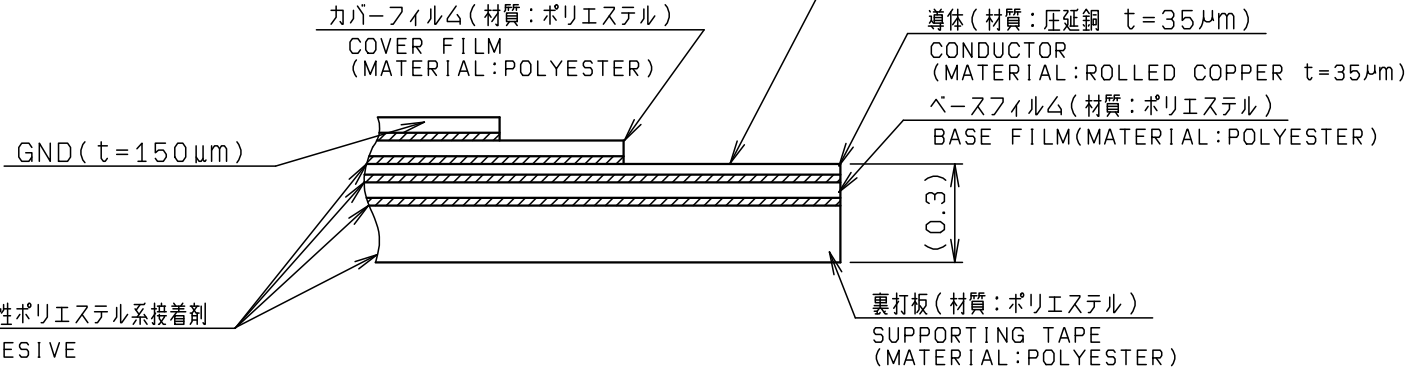

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0. 2 10≤ X <30 ±0. 25 30≤ X ±0. 3									
	UNIT		ANGLE		REFER TO SHEET		1/3		
	mm		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED APPRO
	SCALE		DATE		PART NAME / 品名				
ANGLE / 角度		NTS		2017/03/10		FPC/FFC ASSY RA SMT 0.5mm PITCH ZIF TYPE BOTTOM CONTACT			
±3°									
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
N. KITAGAWA	N. KITAGAWA	F. IKEGAMI	Y. FUJII	04 6892 6XX 101 846 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 6892006				2/3	



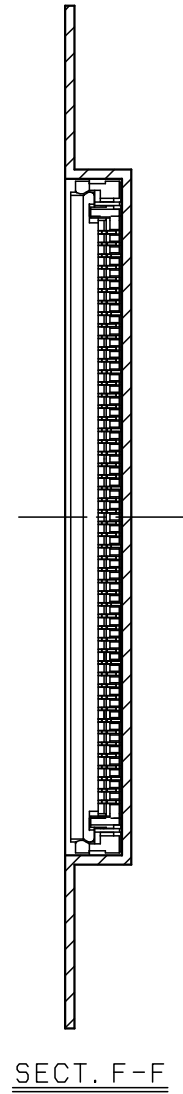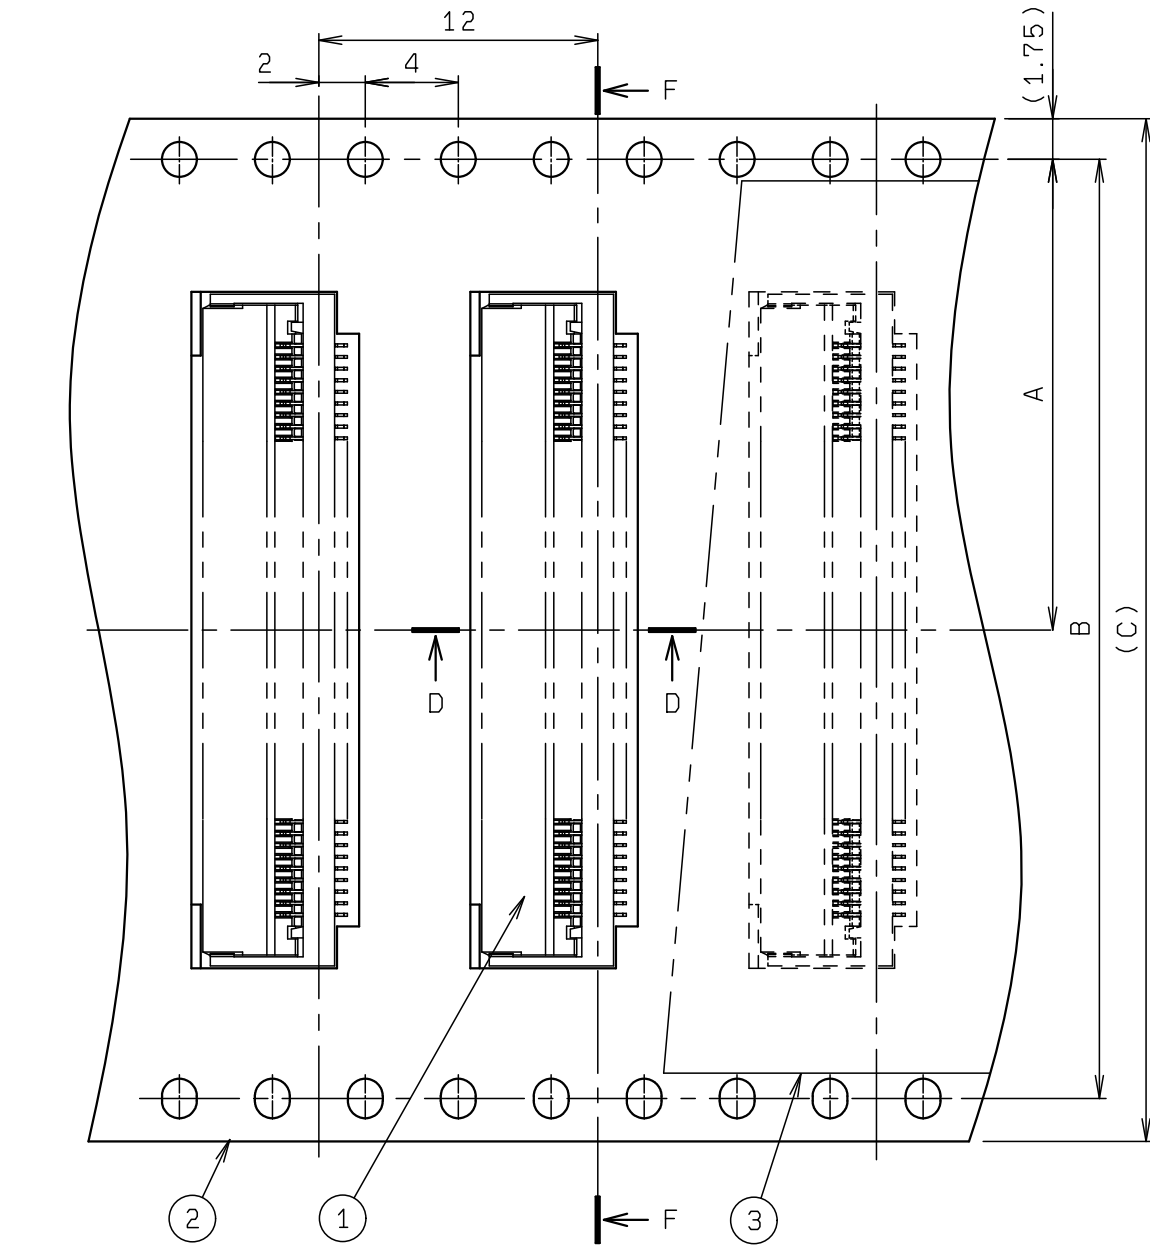

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6892 6XX 101 846 +	2000	—		00 6892 6XX 101 846 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
30	14.2	28.4	32.0	38.4
40	20.2	40.4	44.0	50.4
45	20.2	40.4	44.0	50.4
50	20.2	40.4	44.0	50.4
68	26.2	52.4	56.0	62.4

※この表は3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.


注 記
NOTE

1. 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

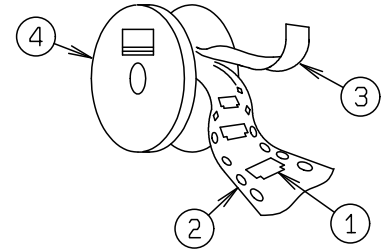

3. 引出し方向
USER DIRECTION OF FEED

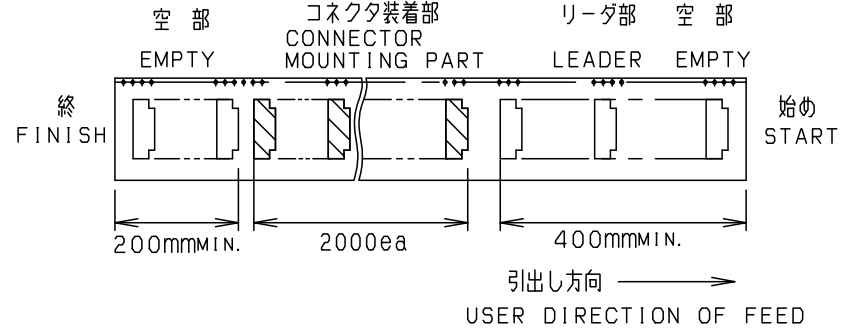

4. 型 番
P/N 04 6892 6XX 101 846 +

極 数
NO. OF POS.
めっきコード
PLATED CODE

※この注記の1～3は3ページ目にのみ適用
※THESE NOTE 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
		POLYSTYRENE (CLEAR)							
X < 10 ±0.2		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/3			
10 ≤ X < 30 ±0.25						NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3						PART NAME / 品名			
ANGLE / 角度 ±3°		SCALE NTS		DATE 2017/03/10		EMBOSS TAPE ASSY FPC/FFC RA SMT			
DRAWN N. KITAGAWA		DESIGNED N. KITAGAWA		CHECKED F. IKEGAMI		0.5mm PITCH ZIF TYPE BOTTOM CONTACT			
APPROVED Y. FUJII						PART NO. / 型番			
						04 6892 6XX 101 846 +			
						DWG NO. / 図番			
						BJS 6892006			
						SHEET REV			
						13/3 F			

