




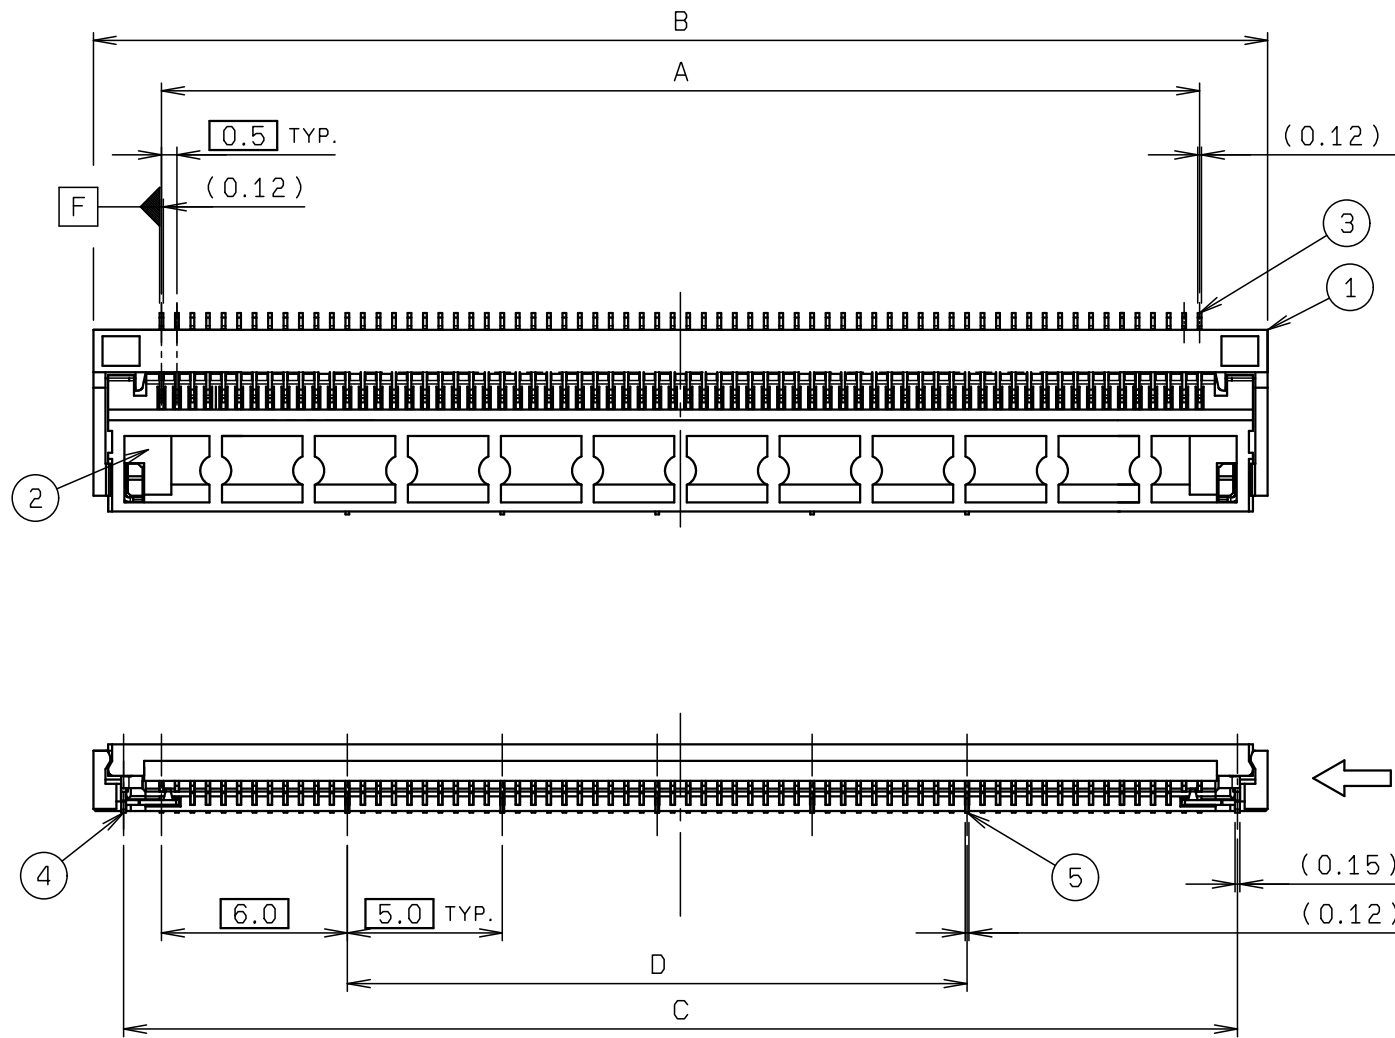


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		COLOR: WHITE UL94V-0
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	COPPER ALLOY		t=0.12 AU PLATING
4	ANCHOR PLATE 1 (WITH GND POINT)		2	PHOS-BRONZE		t=0.15 Sn-Cu PLATING
5	ANCHOR PLATE 2		N/10-1	PHOS-BRONZE		t=0.12 Sn-Cu PLATING

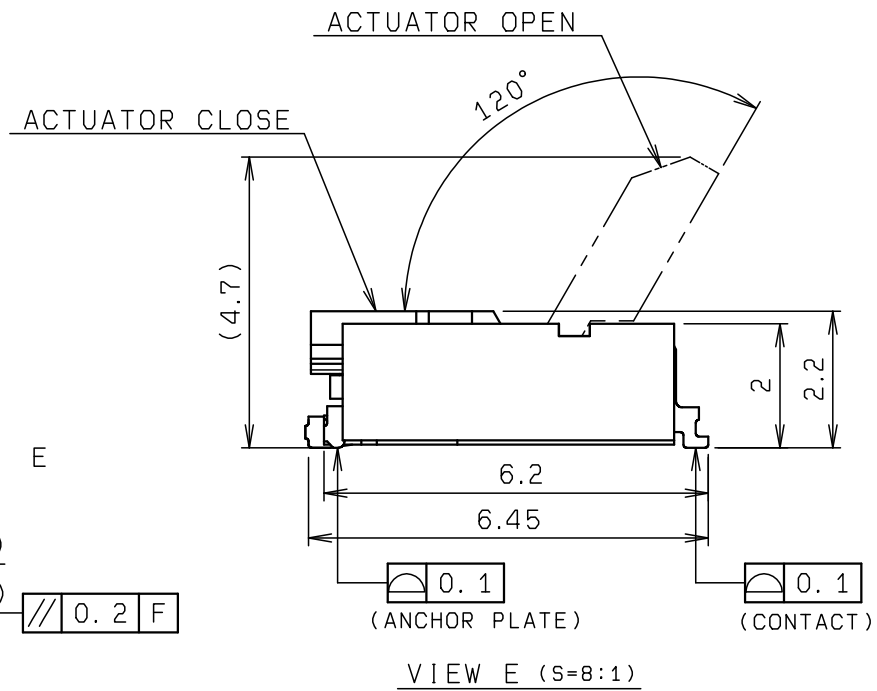

極数 NO. OF POS.	A	B	C	D
30	14.5	18.9	16.95	5.0
40	19.5	23.9	21.95	10.0
45	22.0	26.4	24.45	10.0
50	24.5	28.9	26.95	15.0
68	33.5	37.9	35.95	20.0

※この表は1, 2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

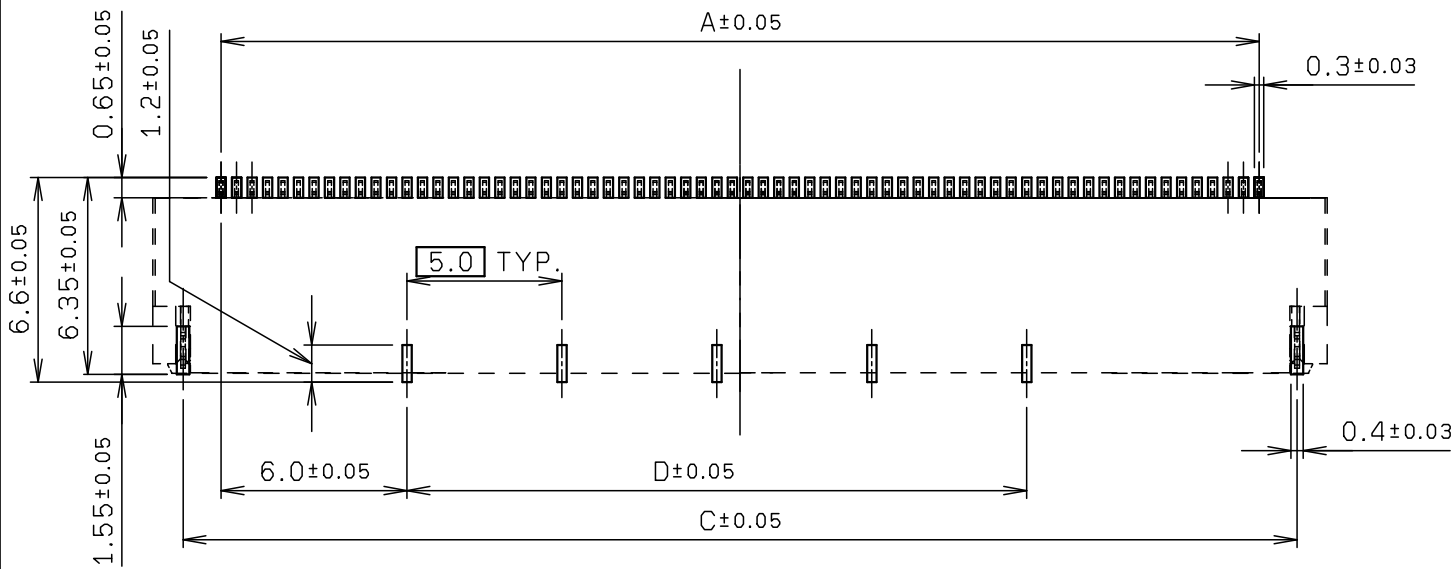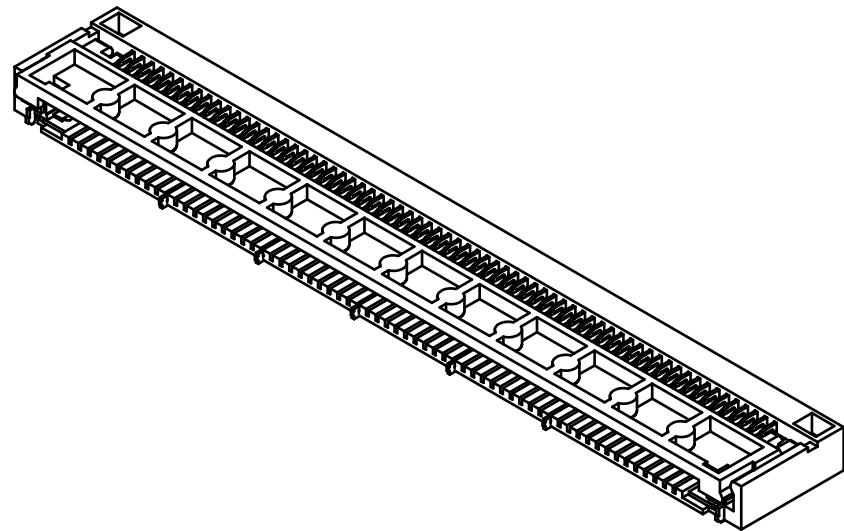


推奨パターン寸法
RECOMMENDED PATTERN LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S) X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 _____		F	DCN23454	2023/11/22	S. MORITA		Y. TSURUOKA		
				E	DCN23180	2023/05/08	N. KITAGAWA		N. NAKAJIMA		
		UNIT mm		ANGLE 3RD		O	EDN-241	2017/05/17	R. MANABE		Y. FUJII
						NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE 4 : 1		DATE 2017/05/17		PART NAME / 品名 FPC/FFC ASSY RA SMT 0.5mm PITCH ZIF TYPE BOTTOM CONTACT					
PART NO. / 型番 04 6892 6XX 201 846 + T											
DRAWN M. TAKAHASHI	DESIGNED R. MANABE	CHECKED	APPROVED Y. FUJII	DWG NO. / 図番 BJS 6892007							
				SHEET/REV 1/3 F							



○ 高耐熱対応 FPC/FFC
High heat-resistant correspondence FPC/FFC

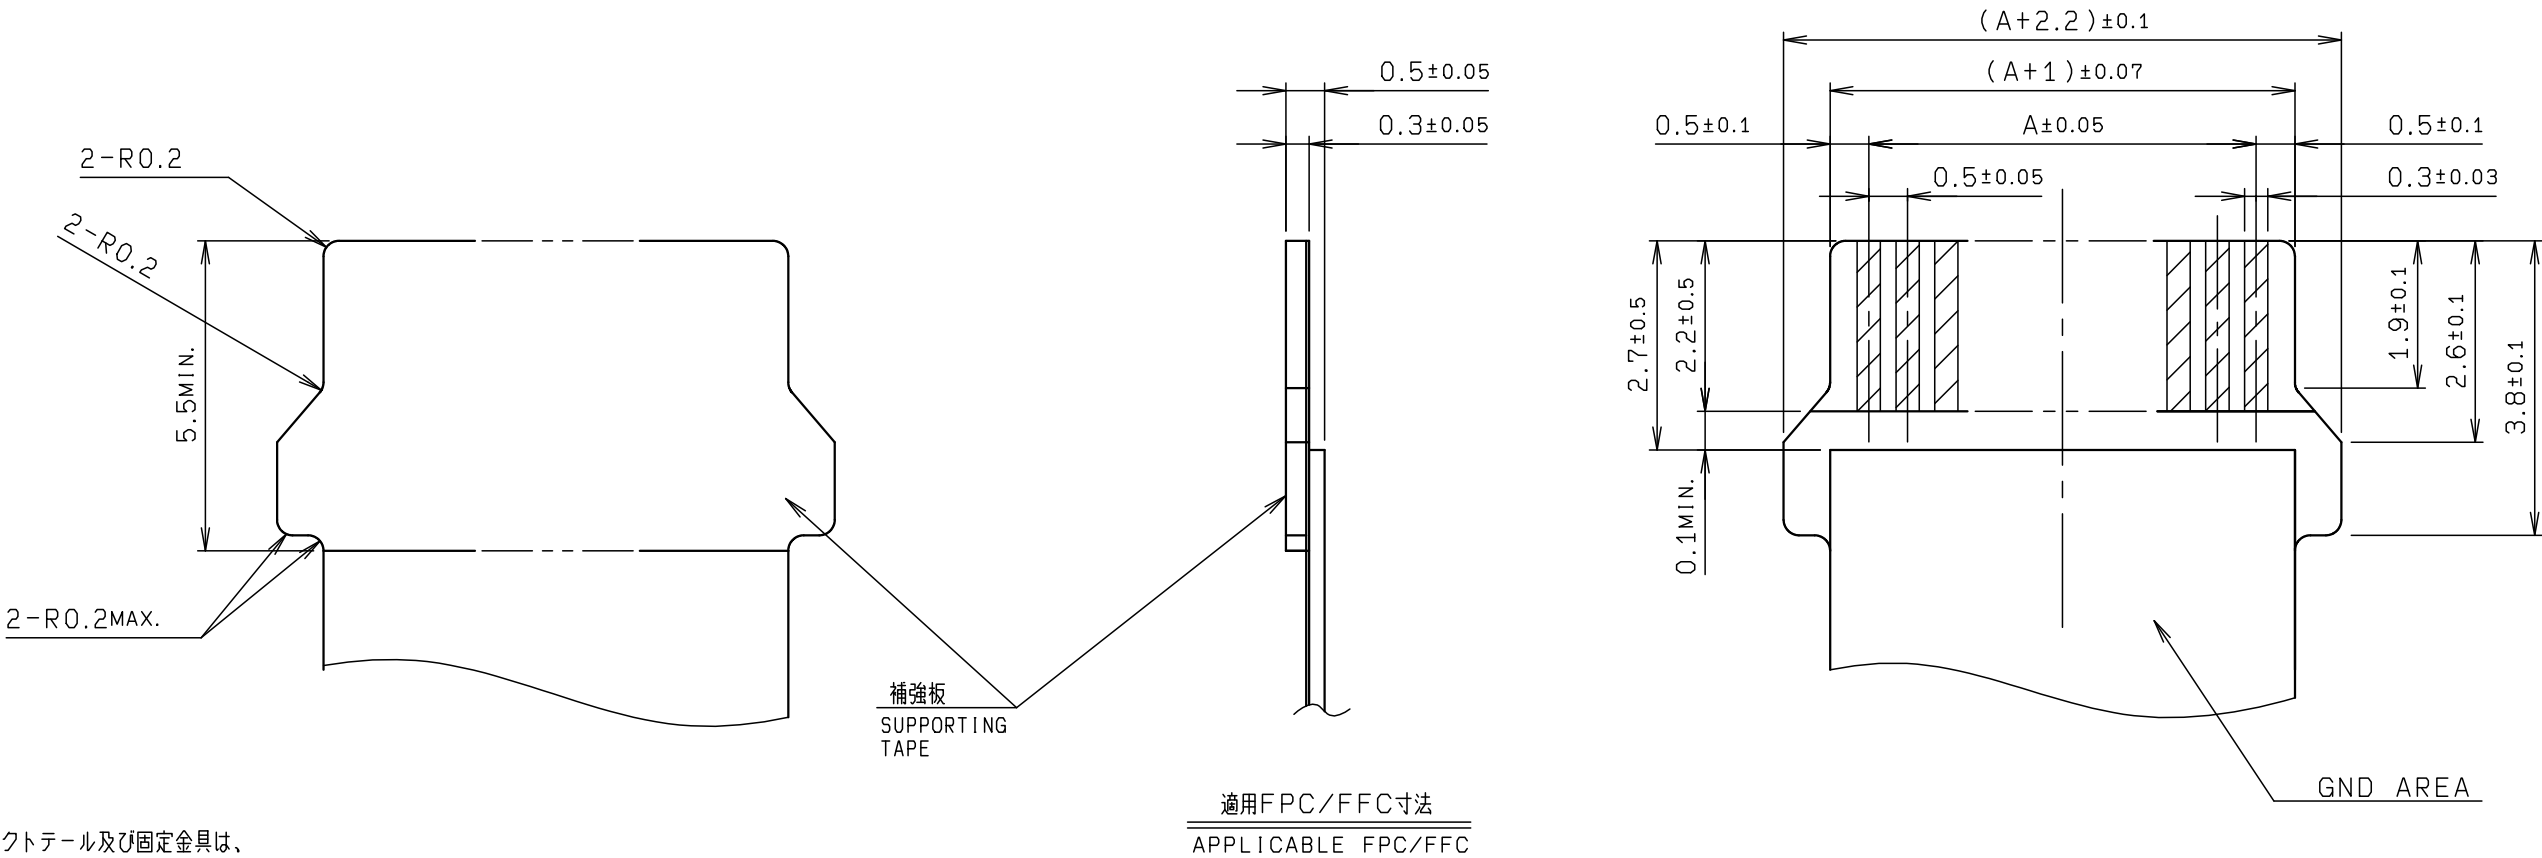

注 記
NOTE

1. コンタクトテール及び固定金具は、
基板より最大浮き0.1mmとする。
FLOATING FROM BOARD OF
CONTACT TAIL AND ANCHOR PLATE
SHALL BE 0.1mmMAX.


2. Nは、極数を示す。
N MEANS NUMBER OF PINS.

※この注記は1，2ページ目にのみ適用
※THIS NOTE IS APPLICABLE TO
SHEET-1 AND SHEET-2 ONLY.

(推奨仕様)






FFC構成
FFC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT:0.5μmMIN. AU:0.05~0.2μm

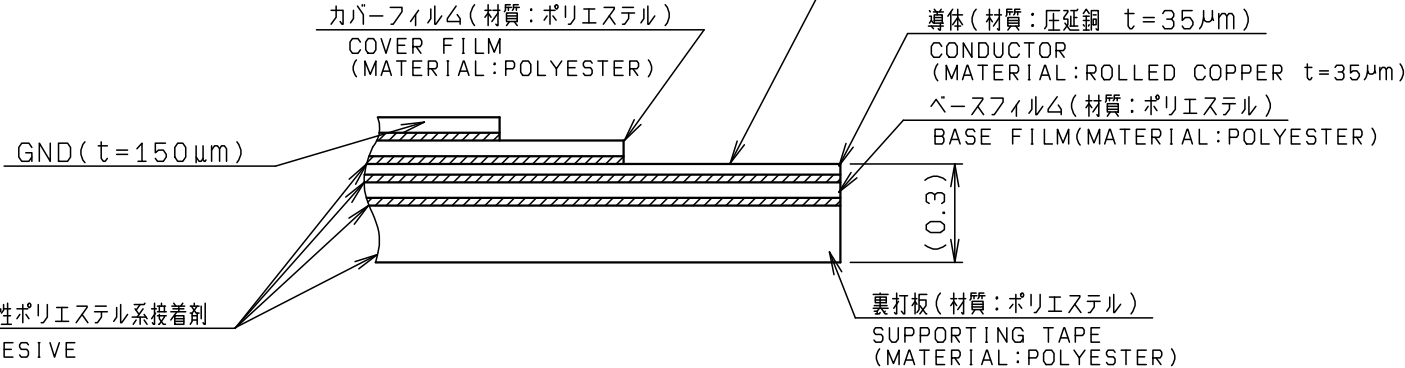


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT mm	ANGLE 3RD		REFER TO SHEET 1/3					
		SCALE NTS	DATE 2017/05/17	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPRO
				PART NAME / 品名 FPC/FFC ASSY RA SMT 0.5mm PITCH ZIF TYPE BOTTOM CONTACT					
ANGLE / 角度 ±3°									
DRAWN M. TAKAHASHI	DESIGNED R. MANABE	CHECKED	APPROVED Y. FUJII	PART NO. / 型番 04 6892 6XX 201 846 + T					
				DWG NO. / 図番 BJS 6892007			SHEET / REV 2/3		

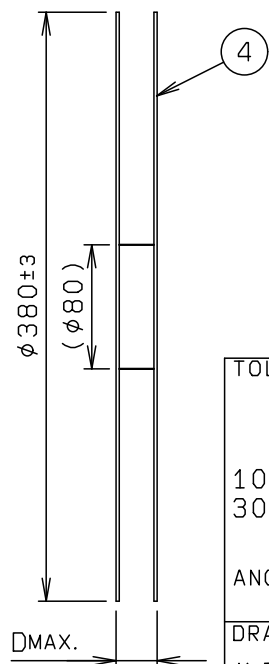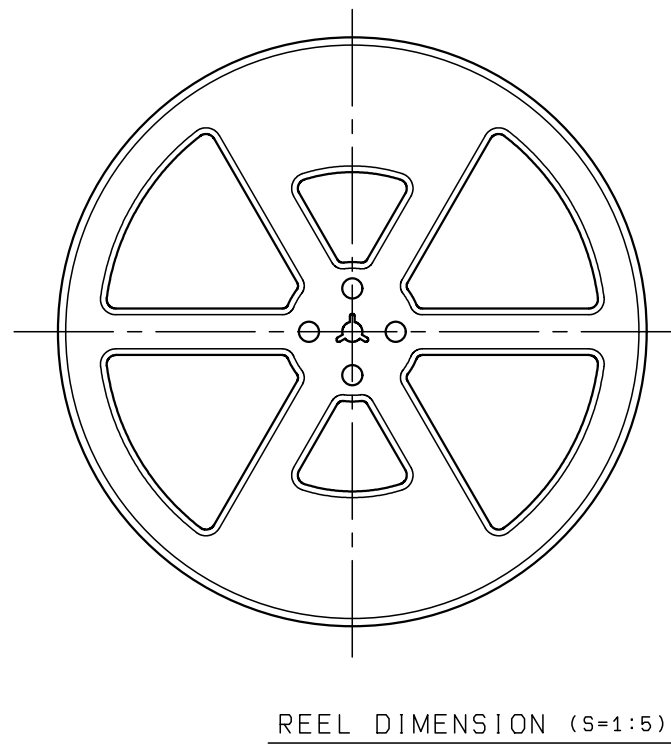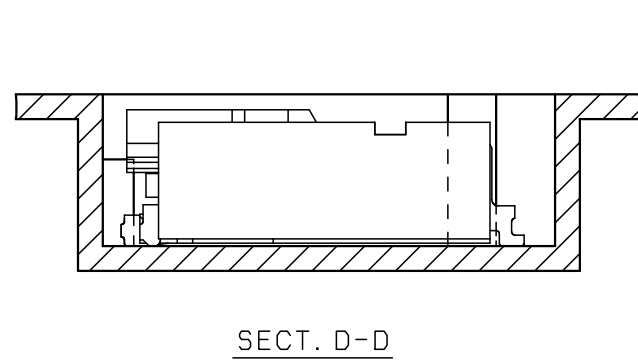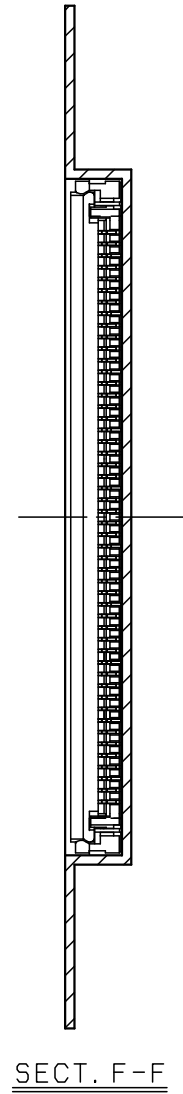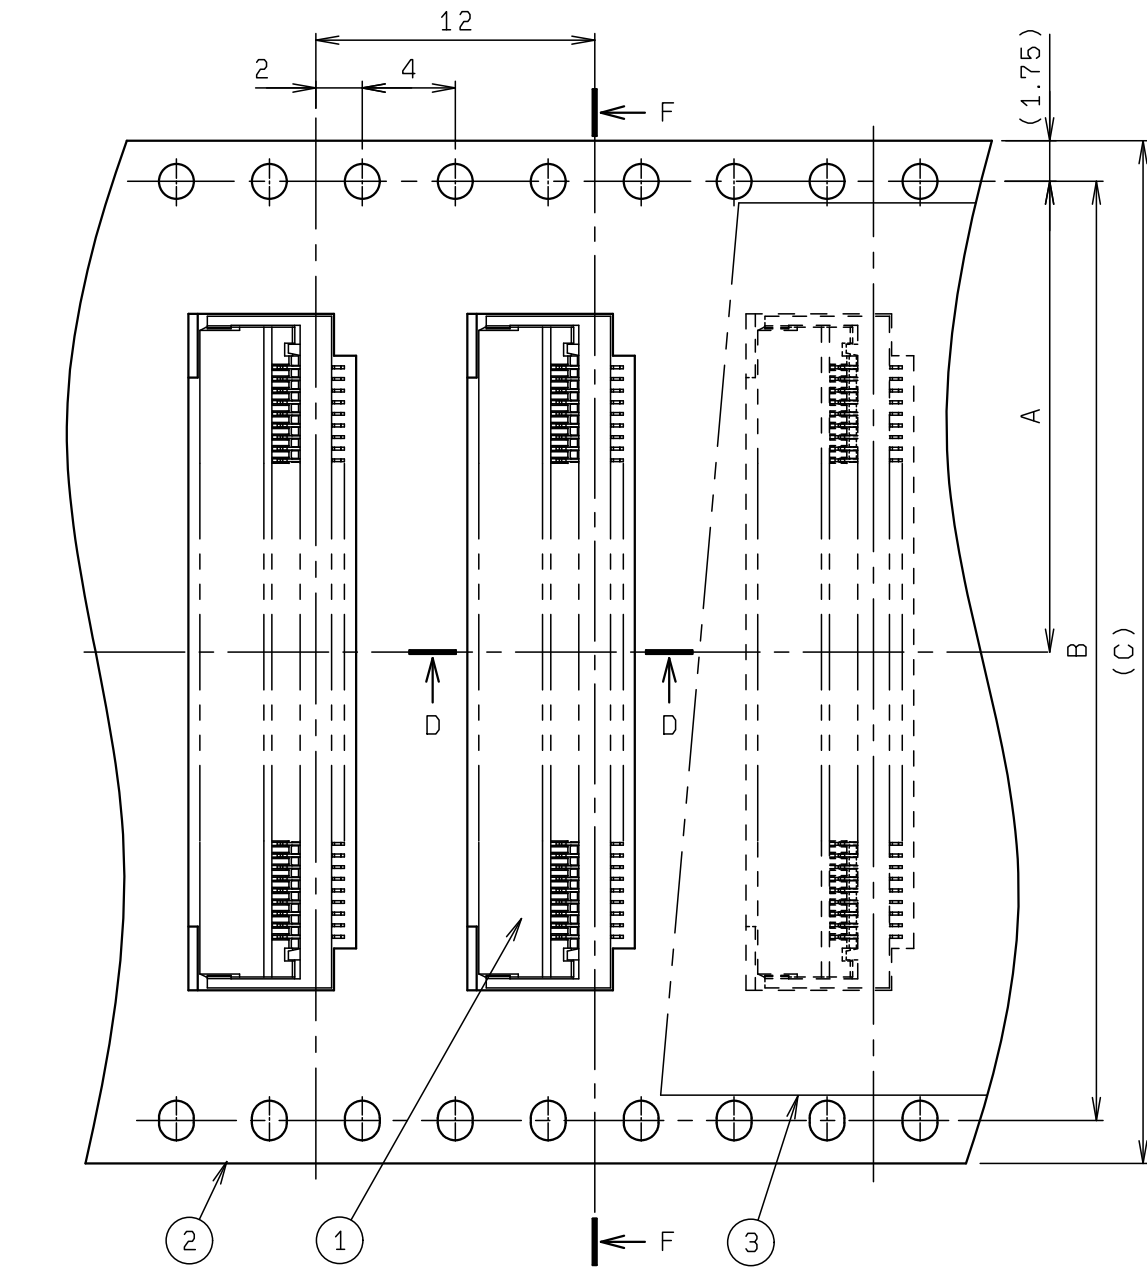

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6892 6XX 201 846 + T	2000	—		00 6892 6XX 201 846 + T
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

- 注 記
NOTE
- 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel
 - 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

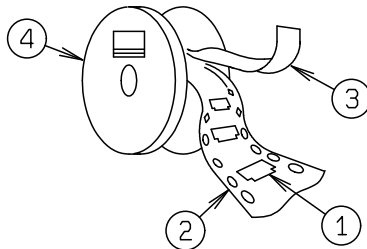

- 引出し方向
USER DIRECTION OF FEED
- 空 部 コネクタ装着部 リーダ部 空 部
EMPTY CONNECTOR MOUNTING PART LEADER EMPTY
- 終 始め
FINISH START
- 200mmMIN. 2000ea 400mmMIN.
- 引出し方向 →
USER DIRECTION OF FEED

- 型 番
P/N 04 6892 6XX 201 846 + T
- 極 数
NO. OF POS. —
- めっきコード
PLATED CODE —

※この注記の1～3は3ページ目のみ適用
※THESE NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S) X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3 ANGLE / 角度 ±3° DRAWN M. TAKAHASHI DESIGNED R. MANABE		PRODUCT SPEC / 製品規格 POLYSTYRENE (CLEAR)							
		UNIT mm	ANGLE 3RD	REFER TO SHEET 1/3					
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名 EMBOSS TAPE ASSY FPC/FFC RA SMT 0.5mm PITCH ZIF TYPE BOTTOM CONTACT					
		CHECKED	APPROVED Y. FUJII	PART NO. / 型番 04 6892 6XX 201 846 + T		DWG NO. / 図番 BJS 6892007			SHEET REV 13/3 F

