
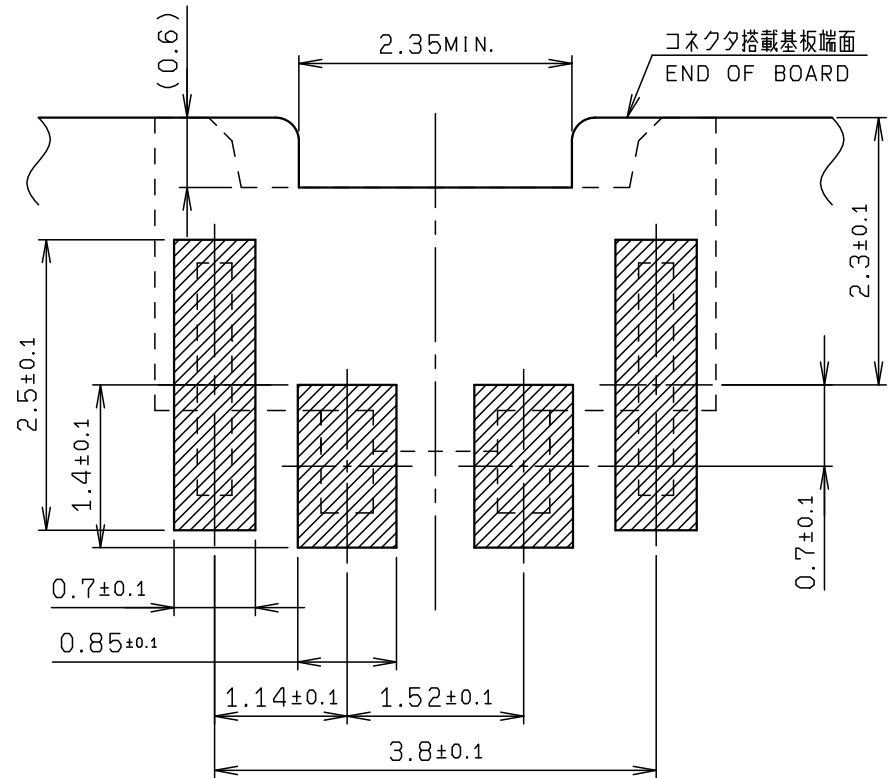
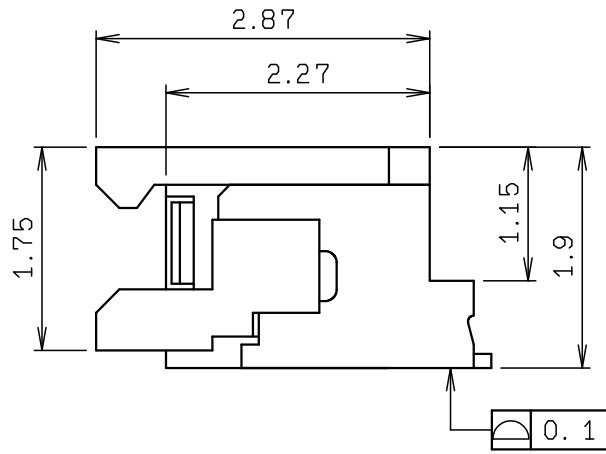
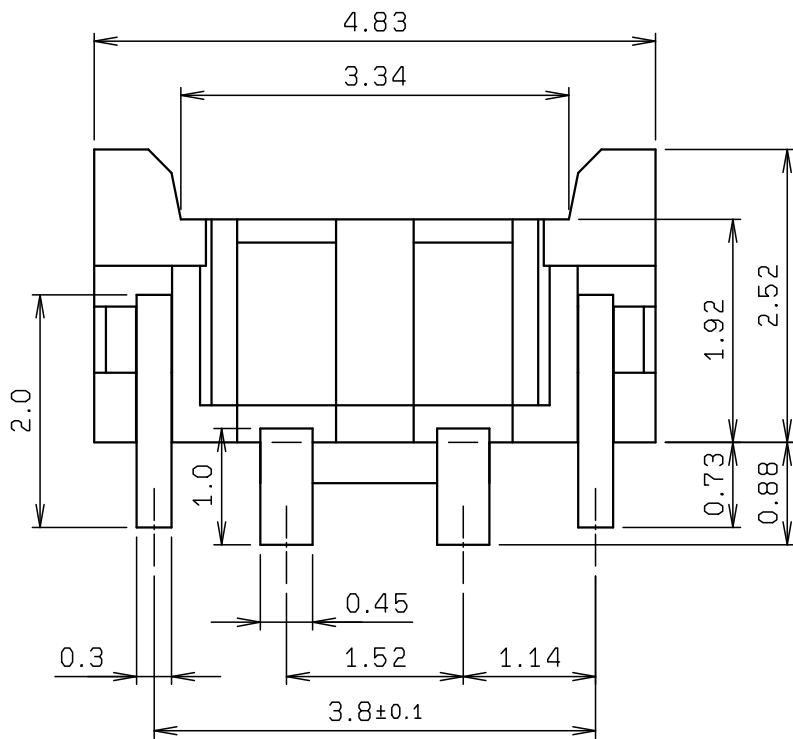
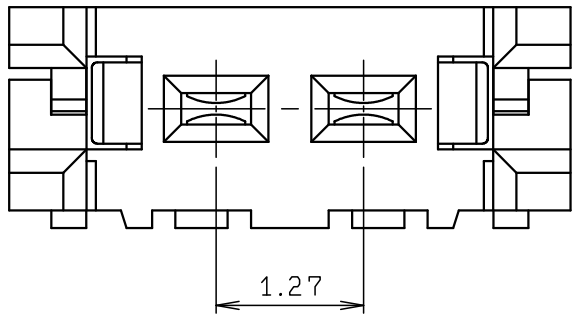


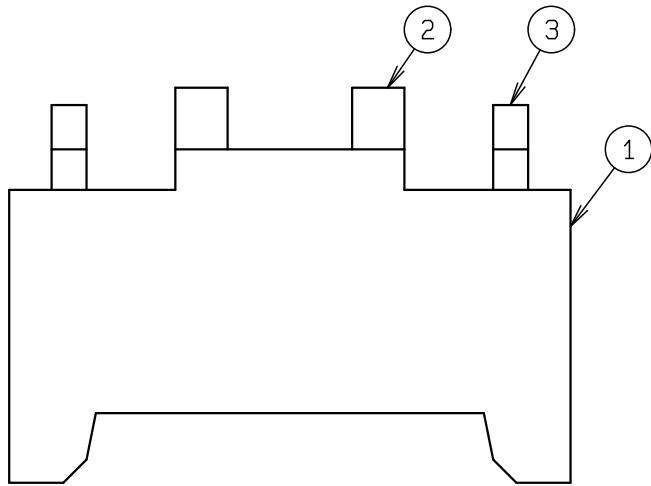

推奨基板寸法
RECOMMENDED P.C BOARD LAYOUT



NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PA46		UL94V-0 COLOR:BLACK
2	CONTACT		2	Be-Cu		t=0.12 Ni UNDER COAT:AU
3	ANCHOR PLATE		2	BRASS		t=0.3 Sn-Cu

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格								
X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°					A	DCN19805	2019/08/19	R. ARAI	H. TAMAI	M. YOSHIDA
	UNIT		ANGLE		O	EDN-026	2005/01/11	M. SASAKI	Y. SHIROYAMA	N. HAYASHI
	mm		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
	SCALE		DATE		PART NAME / 品名					
	15: 1		2005/01/11		SERIES 8005 REC ASSY RA					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番						
LI	M. SASAKI	Y. SHIROYAMA	N. HAYASHI	20 8005 502 100 867 +						
				DWG NO. / 図番					SHEET/REV	
				BJS 8005030					1 / 1 A	




NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 8005 502 100 867 +	3000			
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		

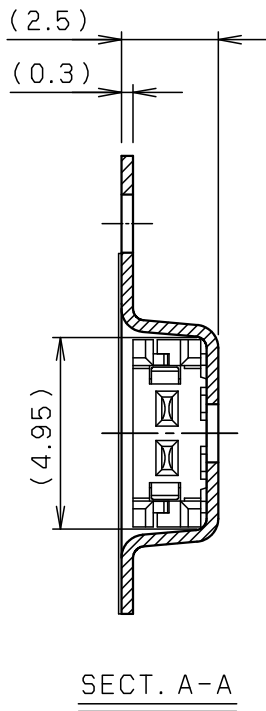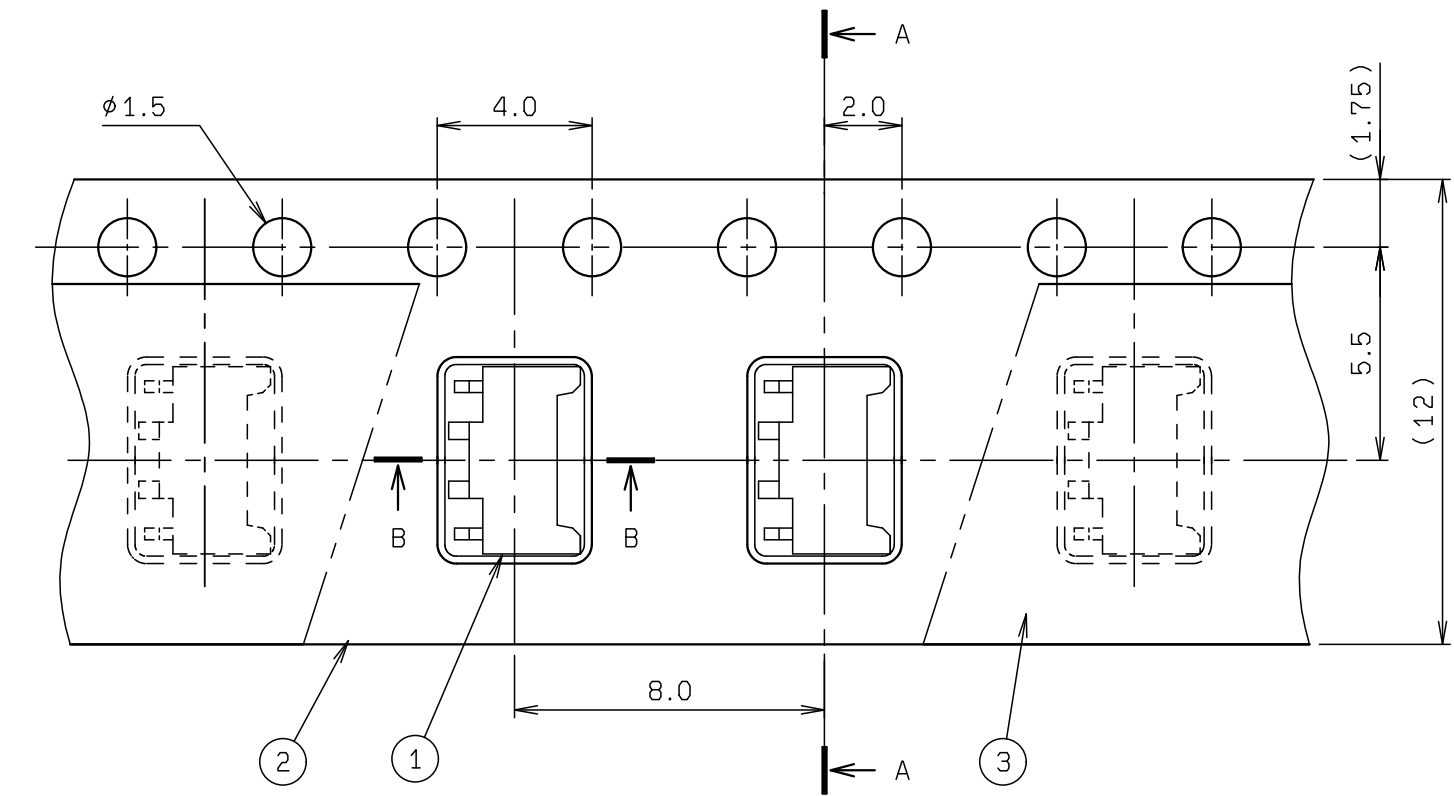


注 記
NOTE

1. 梱包数量 : 3000 個/リール
PACKING QUANTITY : 3000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

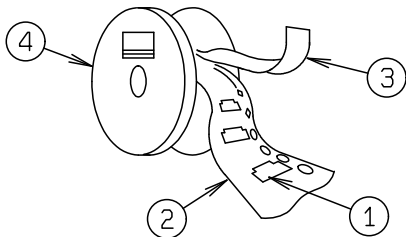


3. 引出し方向
USER DIRECTION OF FEED

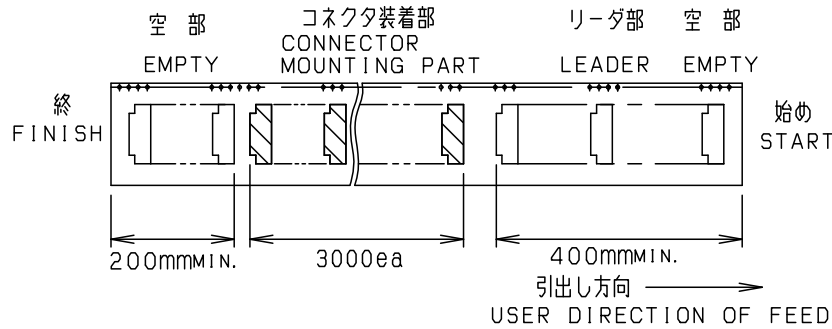


4. 型 番
P/N

24 8005 502 100 867 +

極 数
NO. OF POS.

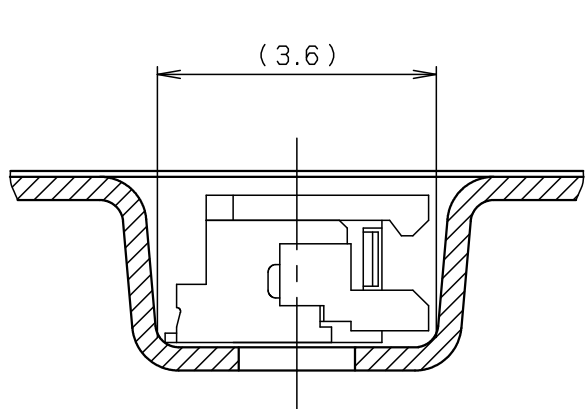

SECT. B-B (S=10:1)

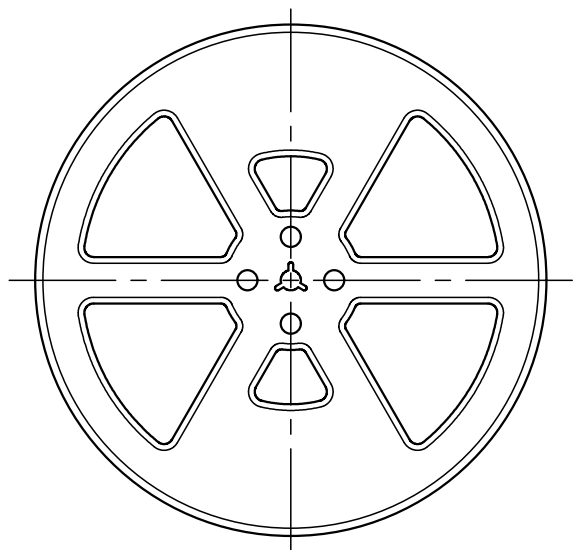

REEL DIMENSION (S=1:5)

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格				
X < 10 ±0.2				A	DCN19805	2019/08/19
10 ≤ X < 30 ±0.25				O	EDN-026	2005/01/11
30 ≤ X ±0.3				NO.	EDN/DCN	DATE
ANGLE / 角度 ±3°		SCALE 5 : 1		PART NAME / 品名		
		DATE 2005/01/11		SERIES 8005 REC ASSY RA SMT TAPING		
DRAWN LI	DESIGNED M. SASAKI	CHECKED Y. SHIROYAMA	APPROVED N. HAYASHI	PART NO. / 型番		
				24 8005 502 100 867 +		
				DWG NO. / 図番		
				BJS 8005033		
				SHEET / REV		
				1 / 1 A		