

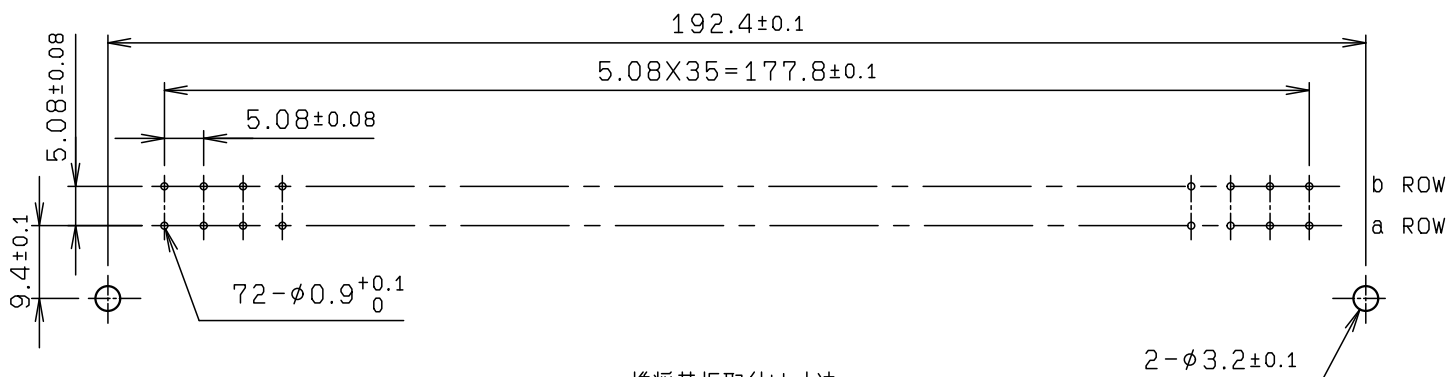
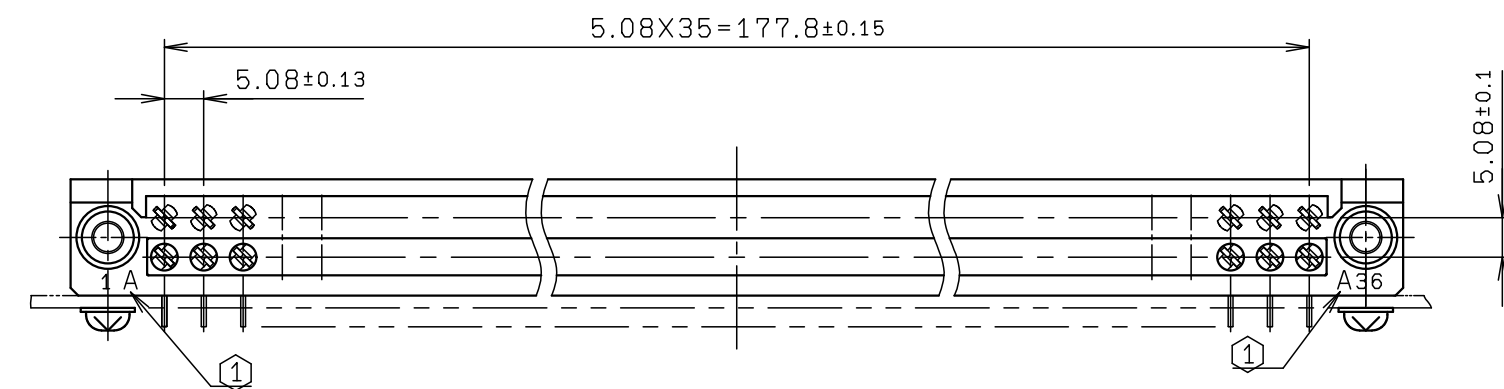
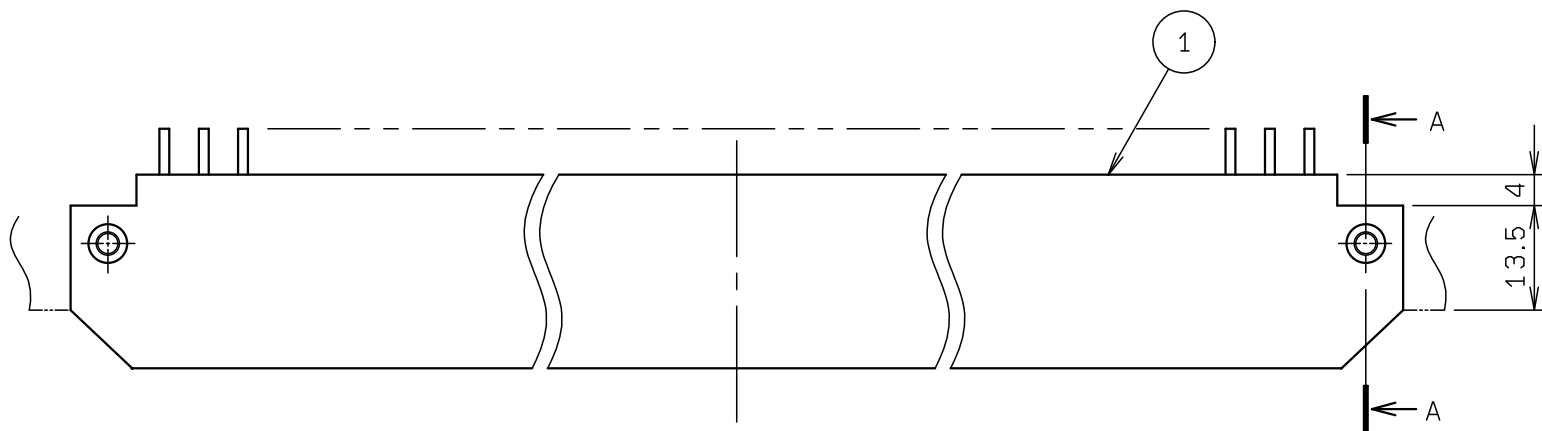
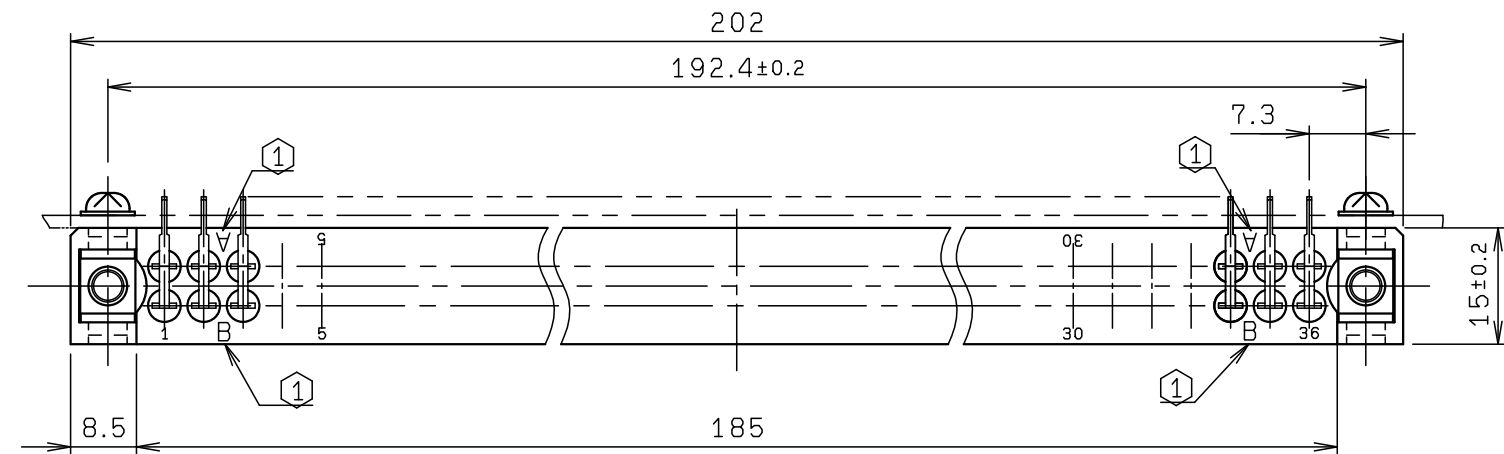


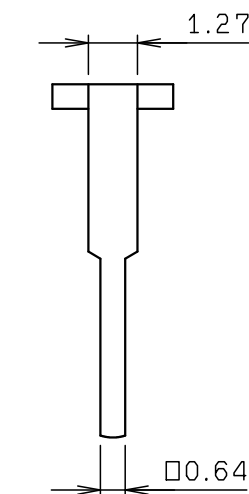


推奨基板取付け寸法
RECOMMENDED BOARD LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PBT (GF30%)		
2	CONTACT		36	PHOS-BRONZE		
3	CONTACT		36	PHOS-BRONZE		
4	LOCKING NUT		2	SUS304		
5	NUT		4	BsBM		
6	CROSS RECESSED PAN HEAD SCREW	M3X5	2			RECOMMENDED HARD WARE
7	PLAIN WASHER	FOR M3	2			RECOMMENDED HARD WARE

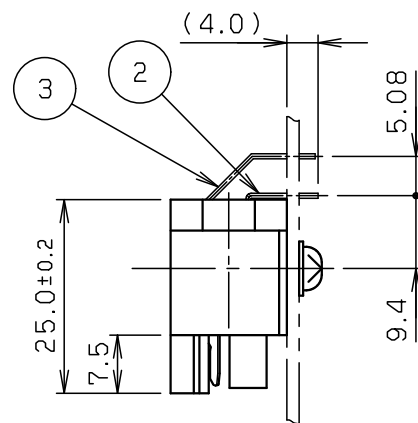

コンタクトテール詳細図
CONTACT TAIL (S=5:1)

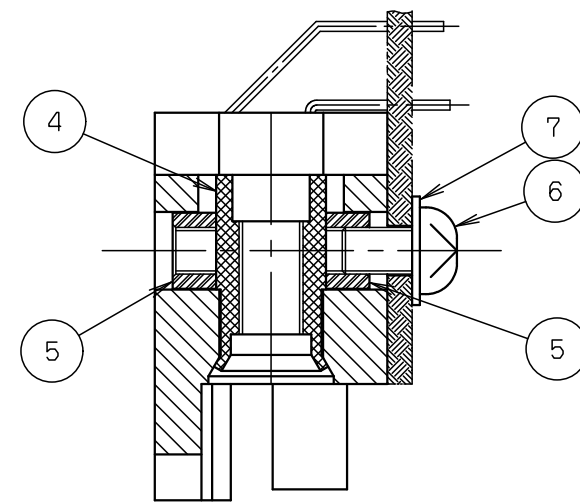

SECT. A-A (S=2:1)

注 記
NOTE

① サーキットNO. A, Bは, 黒色捺印のこと。
CURCUIT NO. A AND B SHALL BE
STAMPED WITH BLACK INK.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

REV. AにてCAD入力
BJ80187Sより移行

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		C	DCN19B36	2019/10/08	R. ARAI		M. YOSHIDA
±0.3				B	DCN-130	1998/02/12	K. OHTAKA	T. MORI	M. AOKI
				01	EDN-082	1980/06/11	K. YASUTAKE		K. YASUTAKE
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名					
				SERIES 8029					
				REC ASSY					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
K. SUZUKI		K. OHTAKA		T. MORI		M. AOKI		00 8029 072 999 001	
								DWG NO. / 図番	
								BJS 8029006	
								SHEET/REV	
								1/1 C	

KYOCERA