
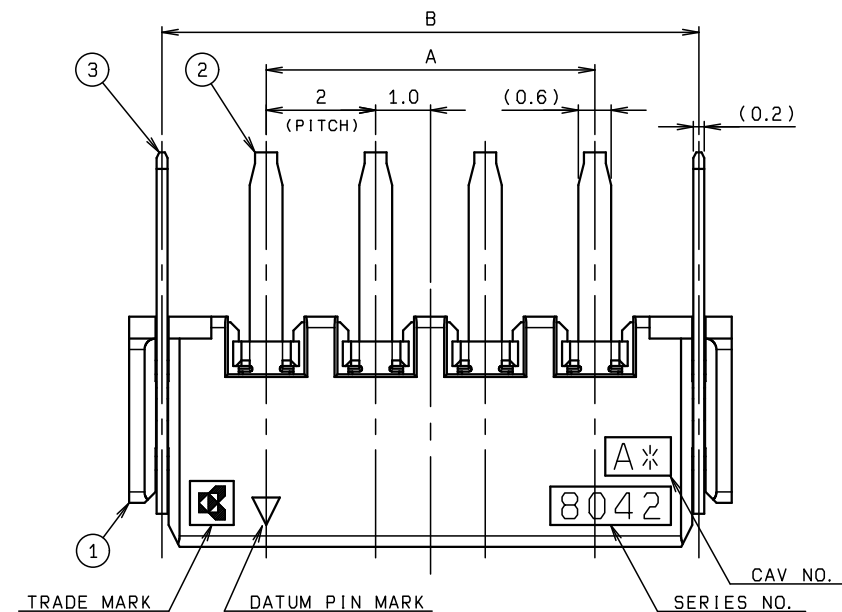
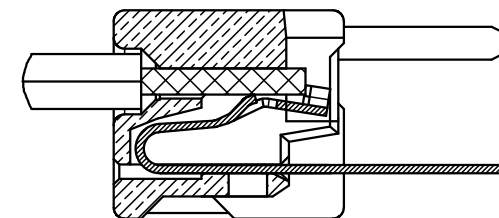
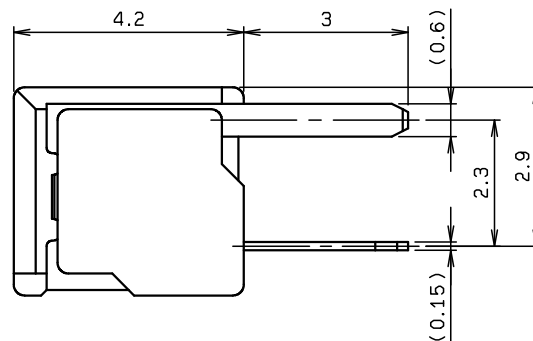


推奨電線寸法(導体: AWG26)
RECOMMENDED WIRE SIZE
(CONDUCTOR: AWG26)

極数 NO. OF POS.	A	B	C	D
2	2.0	5.8	7.0	4.0
4	6.0	9.8	11.0	8.0
6	10.0	13.8	15.0	12.0
8	14.0	17.8	19.0	16.0
10	18.0	21.8	23.0	20.0
11	20.0	23.8	25.0	22.0
13	24.0	27.8	29.0	26.0

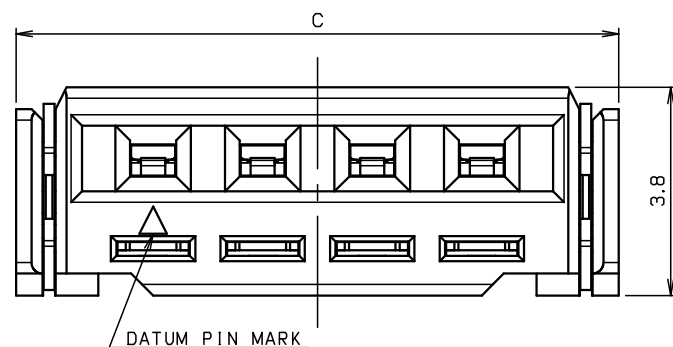


嵌合断面図
MATED STATE

注記
NOTE

1. 型番 00 8042 0XX 100 800 +
P/N
極数 NO. OF POS.
めっきコード
PLATING CODE
800 + : Sn-Cu PLATED

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

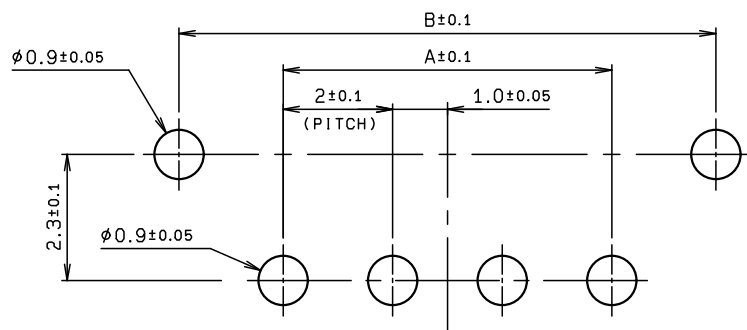

推奨基板寸法(ドリル穴)
RECOMMENDED MOUNTING LAYOUT(DRILL HOLE)

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		C	DCN-331	5-28-12			
X < 10 ±0.2				B	DCN-279	4-16-12	K. YAMANE		H. SADATOKU
10 ≤ X < 30 ±0.25				O	EDN-422	9-21-11	K. YAMANE		H. SADATOKU
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 10:1		PART NAME / 品名					
		DATE 9-21-11		SERIES 8042 WIRE CATCH ASSY ST DIP					
DRAWN K. YAMANE		DESIGNED K. YAMANE		2.0mm PITCH WIRE CATCH CONN. FOR AWG26					
CHECKED		APPROVED H. SADATOKU		PART NO. / 型番					
				00 8042 0XX 100 800 +					
				DWG NO. / 図番					
				BJS 8042001					
				[SHEET] REV 1/1 C					

KYOCERA

KYOCERA Corporation

[SHEET] REV

1/1 C