
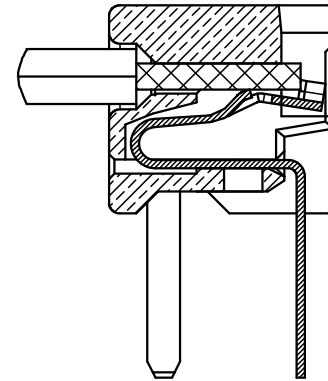
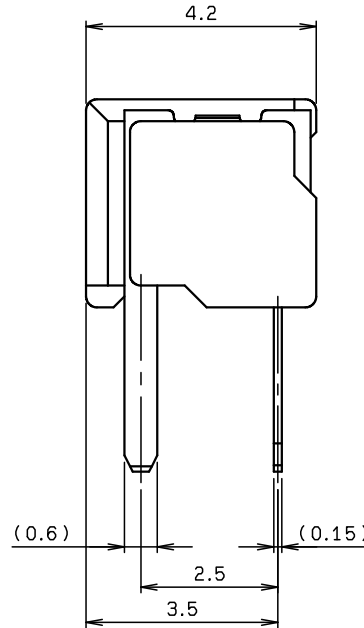
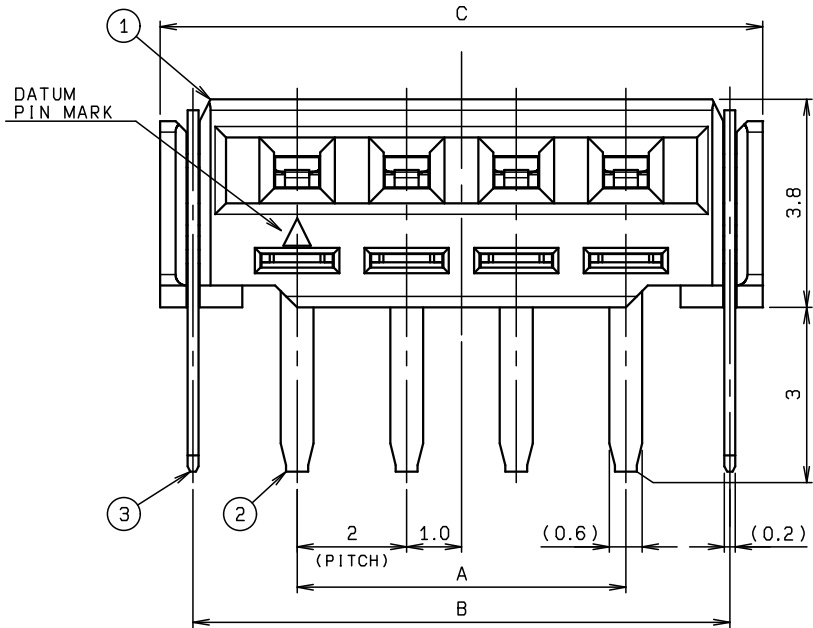
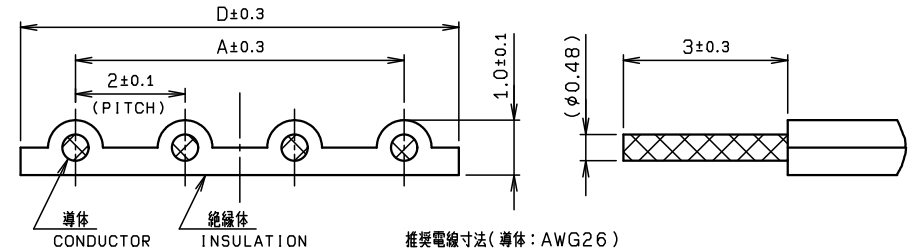


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR:NATURAL (WHITE)
2	CONTACT		n	CROSON COPPER		Sn-Cu SEMI-BRIGHT
3	ANCHOR PLATE		2	BRASS		Sn-Cu SEMI-BRIGHT

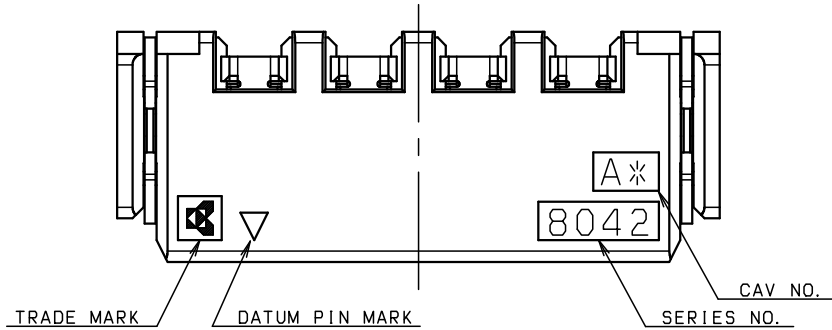


嵌合断面図
MATED STATE

注 記
NOTE
1. 型 番 00 8042 0XX 200 800 +
P/N
極 数 NO. OF POS.
めっきコード
PLATING CODE
800 + : Sn-Cu PLATED

極 数 NO. OF POS.	A	B	C	D
2	2.0	5.8	7.0	4.0
4	6.0	9.8	11.0	8.0
6	10.0	13.8	15.0	12.0
8	14.0	17.8	19.0	16.0
10	18.0	21.8	23.0	20.0
11	20.0	23.8	25.0	22.0
13	24.0	27.8	29.0	26.0

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

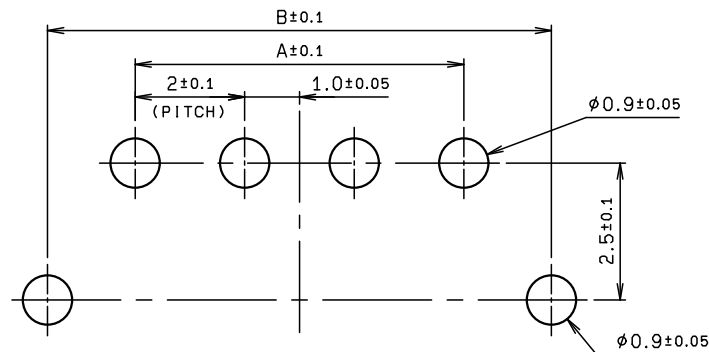

推奨基板寸法 (ドリル穴)
RECOMMENDED MOUNTING LAYOUT (DRILL HOLE)

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN-331	5-28-12			
X < 10 ± 0.2				B	DCN-279	4-16-12	K. YAMANE		H. SADATOKU
10 ≤ X < 30 ± 0.25				O	EDN-422	9-21-11	K. YAMANE		H. SADATOKU
30 ≤ X ± 0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ± 3°		SCALE 10:1		PART NAME / 品名					
		DATE 9-21-11		SERIES 8042 WIRE CATCH ASSY RA DIP					
DRAWN K. YAMANE		DESIGNED K. YAMANE		2.0mm PITCH WIRE CATCH CONN. FOR AWG26					
		CHECKED		PART NO. / 型番					
		APPROVED H. SADATOKU		00 8042 0XX 200 800 +					
				DWG NO. / 図番					
				BJS 8042002					
				[SHEET] REV 1/1 C					



KYOCERA Corporation

[SHEET] REV

1/1 C