
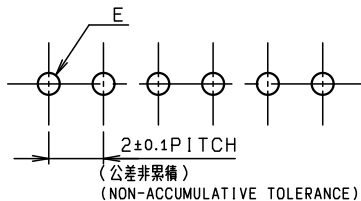


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	PLUG INSULATOR		1	PA66		UL94V-0
2	CONTACT		N	BRASS		φ0.6 Sn-Cu

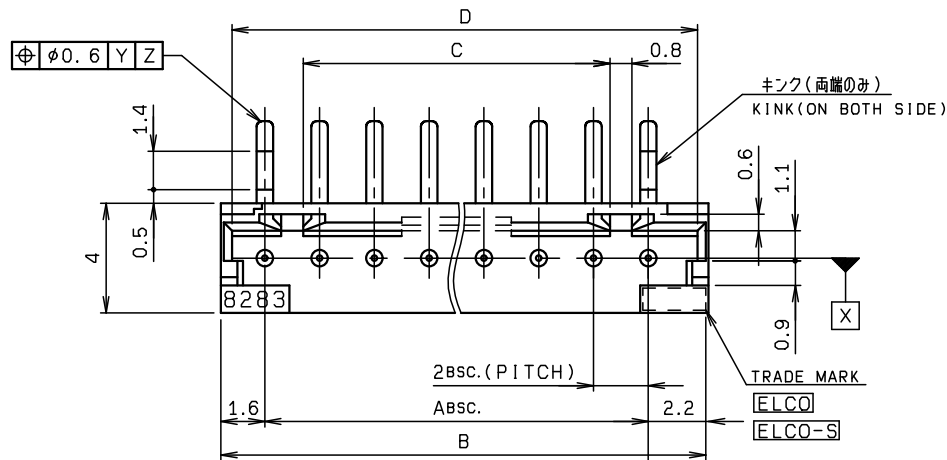


基板穴径 P. W. B. HOLE		
E	パンチ穴 PUNCH HOLE	ドリル穴 N. C. HOLE
	0.7 ^{+0.1} ₀	0.8 ^{+0.1} ₀

推奨基板寸法 (板厚 : 1.2又は1.6)
MOUNTING LAYOUT (T.H.K;t:1.2 OR 1.6)

型番 P/N 00 8283 XX11 00 XXX +
極数 NO. OF POS.
色 COLOR
000:自然色 NATURAL
001:黒 BLACK
002:赤 RED
003:黄色 YELLOW
めっき PLATING
+ :Sn-Cu

極数 NO. OF POS.	A	B	C	D	溝位置 SLOT POSITION
2	2.0	5.8	—	5.0	1&2
3	4.0	7.8	—	7.0	2
4	6.0	9.8	3.2	9.0	1&2, 3&4
5	8.0	11.8	5.2	11.0	1&2, 4&5
6	10.0	13.8	7.2	13.0	1&2, 5&6
7	12.0	15.8	9.2	15.0	1&2, 6&7
8	14.0	17.8	11.2	17.0	1&2, 7&8
9	16.0	19.8	13.2	19.0	1&2, 8&9
10	18.0	21.8	15.2	21.0	1&2, 9&10
11	20.0	23.8	17.2	23.0	1&2, 10&11
12	22.0	25.8	19.2	25.0	1&2, 11&12
13	24.0	27.8	21.2	27.0	1&2, 12&13
14	26.0	29.8	23.2	29.0	1&2, 13&14
15	28.0	31.8	25.2	31.0	1&2, 14&15

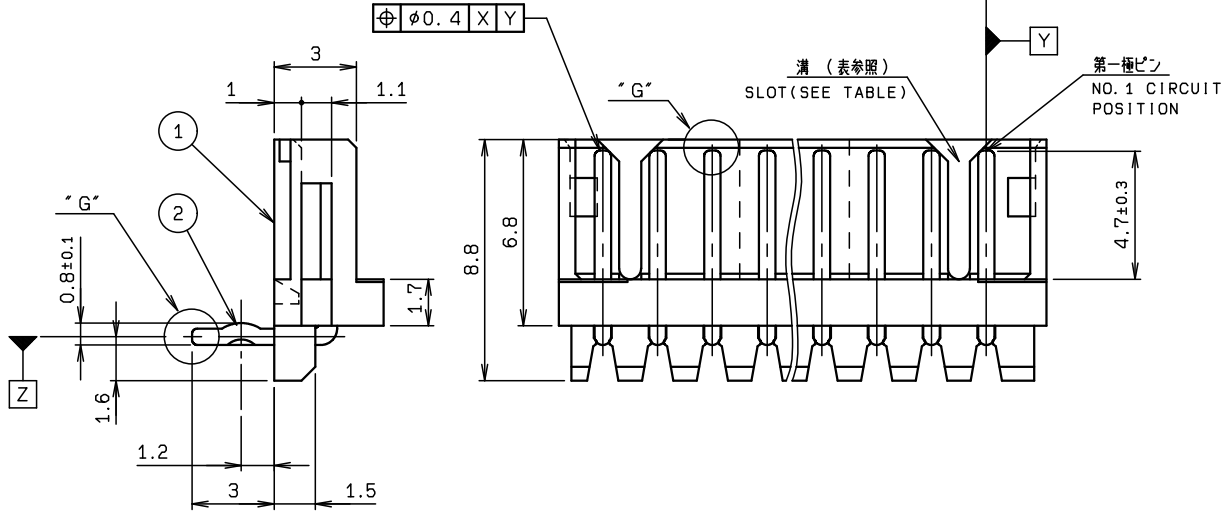

TOLERANCE / 一般公差(S) X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		PRODUCT SPEC / 製品規格 UNIT mm ANGLE 3RD SCALE NTS DATE 7-15-04		C DCN-751	7-24-14				
				B DCN-704	7-11-14	H. TAMAI			H. SADATOKU
ANGLE / 角度 ±3° DRAWN T. KOMATSU DESIGNED M. SASAKI		CHECKED N. HAYASHI		O EDN-794	7-15-04	M. SASAKI			N. HAYASHI
				NO. EDN/DCN	DATE	ISSUE	CHECKED	APPROVED	
				PART NAME / 品名 SERIES 8283 PLUG ASSY RA					
				PART NO. / 製番 00 8283 XX11 00 XXX +					
				DWG NO. / 図番 BJS 8283130					
				[SHEET]REV 1/1 C					

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS