
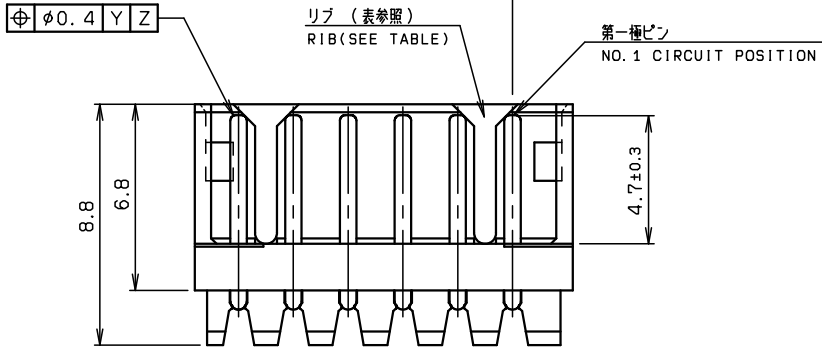
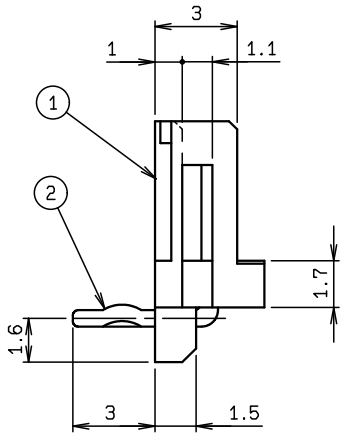


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	PLUG INSULATOR		1	PA66		UL94V-0
2	CONTACT		N	BRASS		φ0.6

極数 NO. OF POS	A	B	C	D	リブ位置 RIB POSITION
2	2	5.8	—	5	BETWEEN PIN 1 AND 2
3	4	7.8	—	7	PIN 2
4	6	9.8	3.2	9	BETWEEN PIN 1 AND 2 BETWEEN PIN 3 AND 4
5	8	11.8	5.2	11	BETWEEN PIN 1 AND 2 BETWEEN PIN 4 AND 5
6	10	13.8	7.2	13	BETWEEN PIN 1 AND 2 BETWEEN PIN 5 AND 6
7	12	15.8	9.2	15	BETWEEN PIN 1 AND 2 BETWEEN PIN 6 AND 7
8	14	17.8	11.2	17	BETWEEN PIN 1 AND 2 BETWEEN PIN 7 AND 8
9	16	19.8	13.2	19	BETWEEN PIN 1 AND 2 BETWEEN PIN 8 AND 9
10	18	21.8	15.2	21	BETWEEN PIN 1 AND 2 BETWEEN PIN 9 AND 10
11	20	23.8	17.2	23	BETWEEN PIN 1 AND 2 BETWEEN PIN 10 AND 11
12	22	25.8	19.2	25	BETWEEN PIN 1 AND 2 BETWEEN PIN 11 AND 12
13	24	27.8	21.2	27	BETWEEN PIN 1 AND 2 BETWEEN PIN 12 AND 13
14	26	29.8	23.2	29	BETWEEN PIN 1 AND 2 BETWEEN PIN 13 AND 14
15	28	31.8	25.2	31	BETWEEN PIN 1 AND 2 BETWEEN PIN 14 AND 15

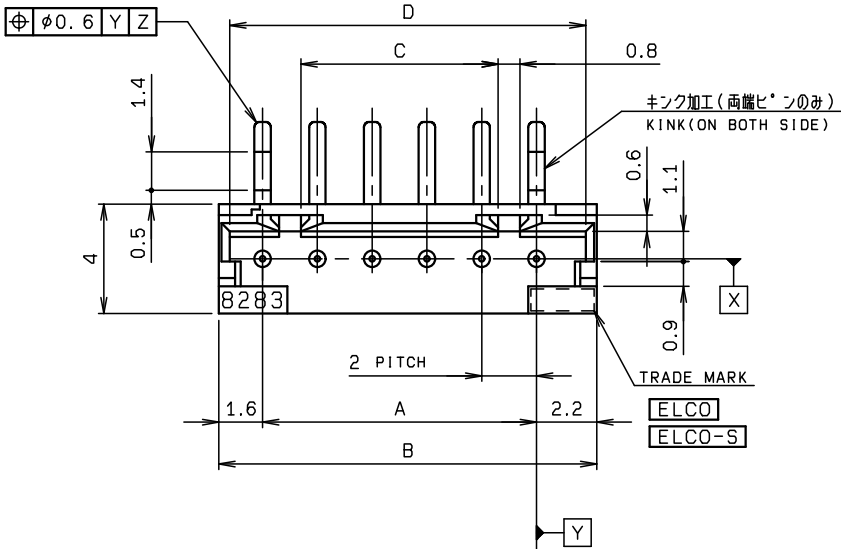


型番
P/N 00 8283 XX11 XX XXX +

極数
NO. OF POS.

色調
COLOR
00:自然色 NATURAL
01:黒 BLACK
02:赤 RED
03:黄 YELLOW

めっき
PLATING
868+:AU
857+:AU

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

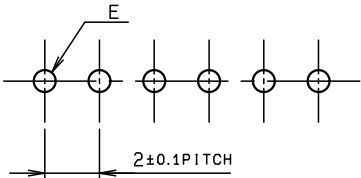

基板穴径 P.W.B HOLE	
パンチ穴 PUNCH HOLE	ドリル穴 N.C HOLE
E 0.7 ^{+0.1} ₋₀	0.8 ^{+0.1} ₋₀

(公差非累積)
(NON-ACCUMULATIVE TOLERANCE)
推奨基板寸法 (板厚: 1.2又は1.6)
MOUNTING LAYOUT (THICKNESS: t=1.2 OR 1.6)

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		O ECN-600		5-26-06	
ANGLE / 角度 ±3°		SCALE N.T.S		DATE 5-26-06		NO. EDN/DCN		DATE	
DRAWN T. KOMATSU		DESIGNED		CHECKED		APPROVED		PART NAME / 品名 SERIES 8283 PLUG ASSY RA	
								PART NO. / 型番 00 8283 XX11 XX XXX +	
								DWG NO. / 図番 BJS 8283152	
								[SHEET]REV 1/1 0	



KYOCERA Corporation