

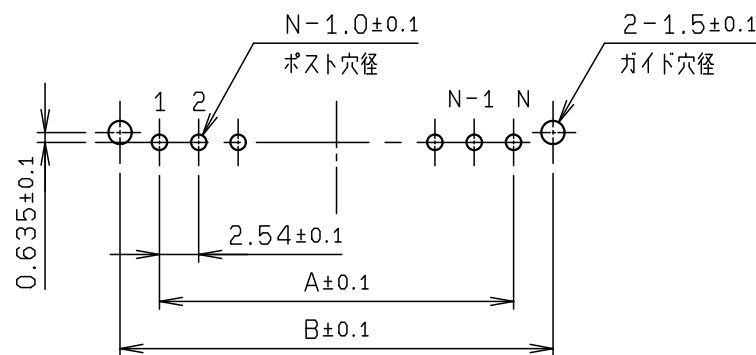
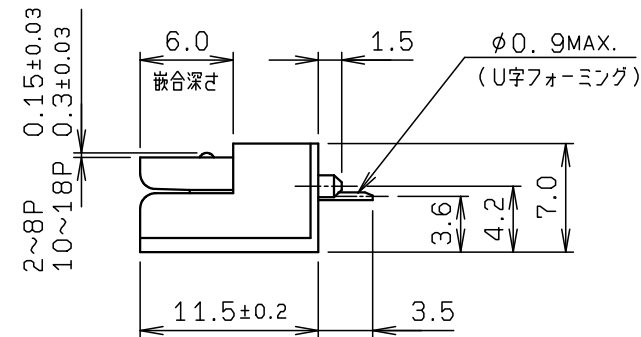
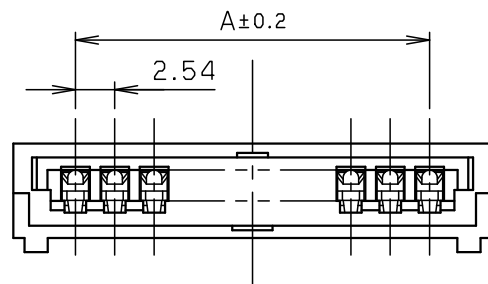
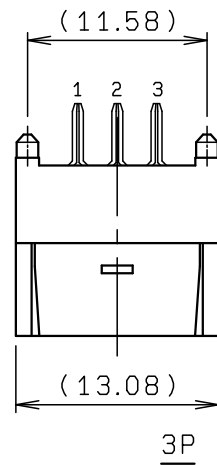


© 2020 KYOCERA Corporation

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

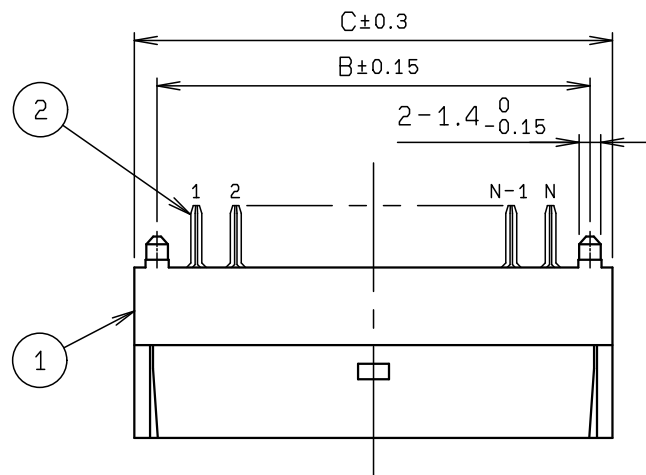

基板取付寸法

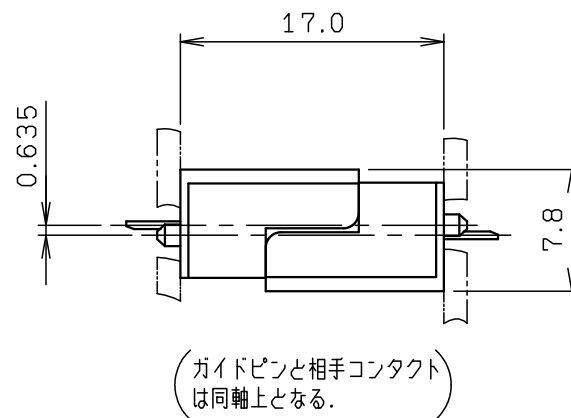

嵌合寸法

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	GF30% PBT		UL94V-0 COLOR:GREEN
2	CONTACT		N	CA725		

定格電流	2.5A
定格電圧	250V
耐電圧	AC 750V RMS
絶縁抵抗	10 ⁹ Ω 以上
インシュレータ材質	30%ガラス入りポリブチレンテレフタレート (UL94V-0) 緑色
コンタクト材質	CA-725
ロッキング	ハウジング ロッキング
挿抜力	製品規格に基づく

極 数 NO. OF POS.	A	B	C
2	2.54	7.62	10.54
3	5.08	11.58	13.08
4	7.62	12.70	15.62
6	12.70	17.78	20.70
8	17.78	22.86	25.78
10	22.86	27.94	30.86
12	27.94	33.02	35.94
14	33.02	38.10	41.02
16	38.10	43.18	46.10
18	43.18	48.26	51.18

型 番 00 9021 XX12 00 XXX
P/N
極 数 NO. OF POS
めっきコード
PLATING CODE
392 :Ni UNDER COAT 0.8~3.8μm
Ag 2μm(ALL OVER)
339 :Ni UNDER COAT 0.8~3.8μm
Au 0.2μmMIN.(ALL OVER)
891SP:Ni UNDER COAT 0.8~3.8μm
CONTACT AREA :Au 0.76μmMIN.
OTHER AREA :Au 0.25μmMIN.

TOLERANCE / 一般公差(S) ±0.3		PRODUCT SPEC / 製品規格 UNIT mm ANGLE 3RD SCALE NTS DATE 1995/04/03		K	DCN20098	2020/01/30	M. YOSHIDA		M. YOSHIDA
				J	DCN19A80	2019/10/01	M. YOSHIDA		K. YAMANE
				O	EDN-099	1986/04/01	S. SUZUKI		K. HONDA
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
				PART NAME / 品名 SERIES 9021 CONNECTOR ASSY SINGLE ROW ST TYPE					
DRAWN K. SUZUKI		DESIGNED K. KAKIUCHI		CHECKED M. SUZUKI		APPROVED M. AOKI		PART NO. / 型番 00 9021 XX12 00 XXX	
								DWG NO. / 図番 BJS 9021090	
								SHEET/REV 1/1 K	

KYOCERA