


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	GF30% PBT		UL94V-0 COLOR:GREEN
2	CONTACT		N	CA725		

定格電流	2.5A
定格電圧	250V
耐電圧	750V AC RMS
絶縁抵抗	10 ⁹ Ω 以上
インシュレータ材質	30%ガラス入りポリブチレンテレフタレート (UL94V-0) 緑色
コンタクト材質	CA-725
ロッキング	ハウジング ロッキング
挿抜力	製品規格に基づく

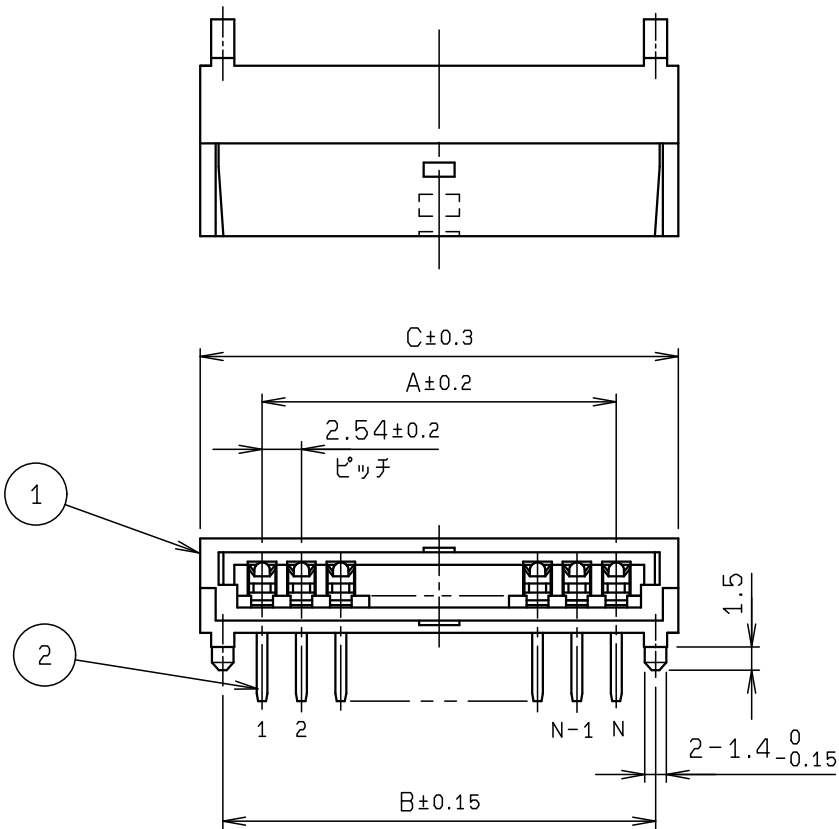

極 数 NO. OF POS.	A	B	C
2	2.54	7.62	10.54
3	5.08	11.58	13.08
4	7.62	12.70	15.62
6	12.70	17.78	20.70
8	17.78	22.86	25.78
10	22.86	27.94	30.86
12	27.94	33.02	35.94
14	33.02	38.10	41.02
16	38.10	43.18	46.10
18	43.18	48.26	51.18
20	48.26	53.34	56.26

型 番 00 9021 XX11 00 XXX
P/N



極 数
NO. OF POS

めっきコード
PLATING CODE

392 :Ni UNDER COAT 0.8~3.8μm
Ag 2μm(ALL OVER)

339 :Ni UNDER COAT 0.8~3.8μm
Au 0.2μmMIN.(ALL OVER)

891SP:Ni UNDER COAT 0.8~3.8μm
CONTACT AREA :Au 0.76μmMIN.
OTHER AREA :Au 0.25μmMIN.

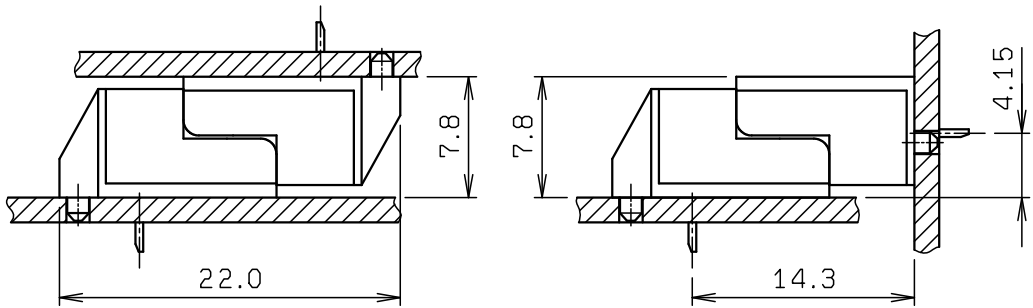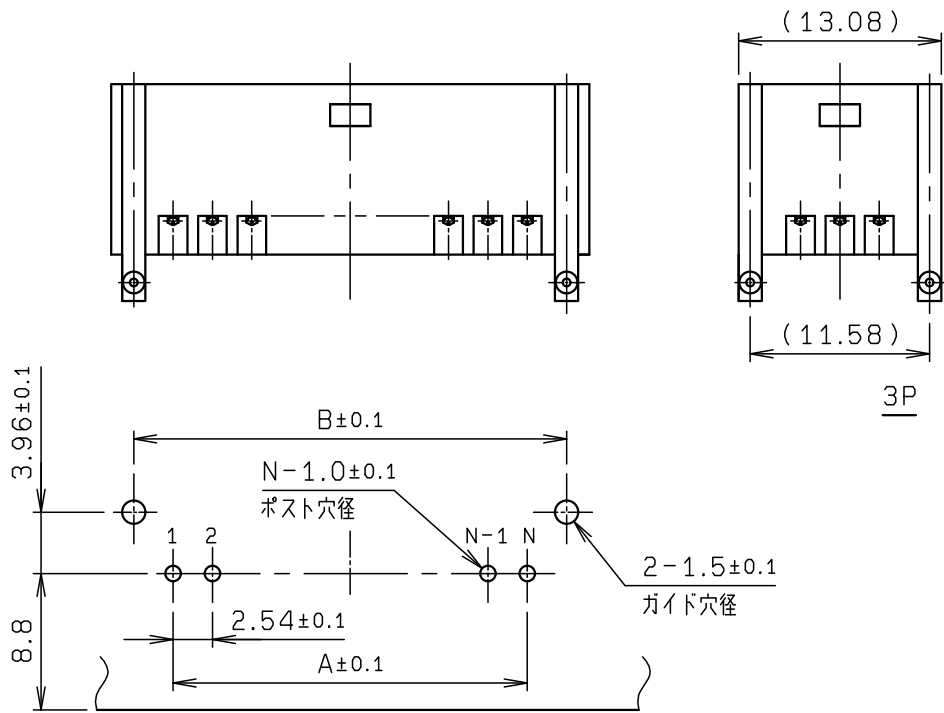

嵌合寸法

↑
コネクタ嵌合方向
基板取付寸法

REV. CにてCAD入力
REV. AにてBJS9021057より分割書替え

TOLERANCE / 一般公差(S) ±0.3		PRODUCT SPEC / 製品規格 _____		H	DCN20098	2020/01/30	M. YOSHIDA		M. YOSHIDA		
				G	DCN-1618	2005/12/12	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI		
		UNIT mm		ANGLE 3RD		O	EDN-180	1987/05/09	S. SUZUKI		K. HONDA
						NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE 2 : 1		DATE 1993/03*09		PART NAME / 品名 SERIES 9021 SINGLE ROW ASSY HORIZONTAL TYPE					
DRAWN Y. OHISHI	DESIGNED HASHIMOTO	CHECKED	APPROVED K. ONO	PART NO. / 型番 00 9021 XX11 00 XXX							
				DWG NO. / 図番 BJS 9021091					SHEET/REV 1/1 H		

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS