

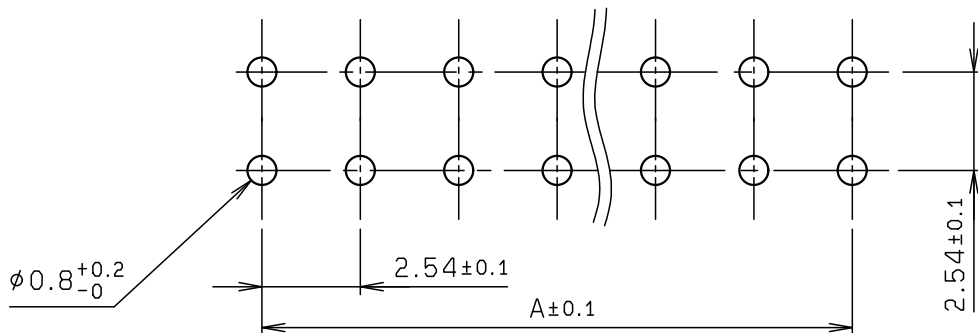



© 2019 KYOCERA Corporation

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

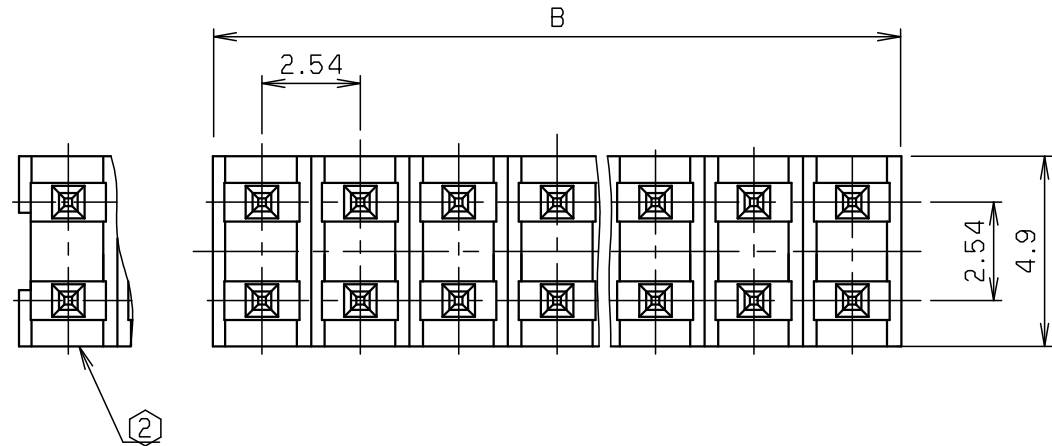

基板穴明け寸法
MOUNTING LAYOUT

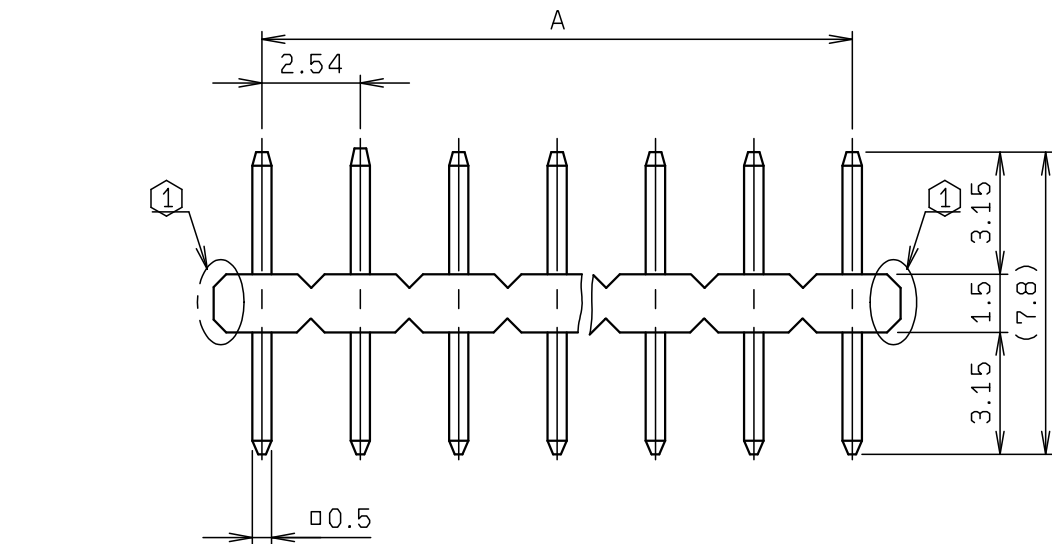

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PPS		UL94V-0 COLOR:BLACK
2	POST CONTACT		N	BRASS		

極数 NO. OF POS	A	B ^{+0.5} _{-0.2}
2		2.54
4	2.54	5.08
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40

型番 P/N 00 9067 XX 2 000 XXX +

極数 NO. OF POS. _____
列数 ROW _____
めっきコード FINISH CODE _____
801: Ni下地, Sn-Cuめっき 2.0μm以上
Ni UNDER COAT, Sn-Cu PLATING 2.0μmMIN.
806: Ni下地, Auめっき 0.1μm以上
Ni UNDER COAT, Au PLATING 0.1μmMIN.

注記 NOTE

- ① 極数18以下はノッチ部よりカットするため カット部は破断面のままとする。
CONNECTORS UNDER 18 POSITION ARE MADE
BY CUTTING AT NOTCH AREA.
CUT SURFACE SHALL BE LEFT AS IT IS.
- ② 端部にゲートがある場合の形状。
CONFIGURATION WHEN GATE EXSISTS AT THE EDGE.

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2				A	DCN19898	2019/09/02	M. YOSHIDA		K. YAMANE
10 ≤ X < 30 ±0.25				O	EDN-1164	2004/10/28	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°				PART NAME / 品名					
				SERIES 9067 PLUG ASSY ST DIP					
				MINI-BIT HEADER CONN. 2ROW					
DRAWN LI		DESIGNED M. YOSHIDA		CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 型番	
								00 9067 XX2 000 XXX +	
								DWG NO. / 図番	
								BJS 9067025	
								SHEET/REV	
								1/1 A	

KYOCERA