

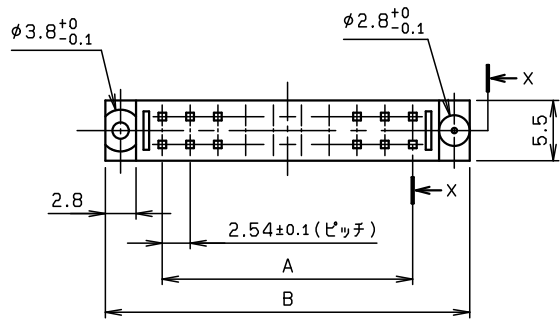


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	GF PBT		COLOR:WHITE
2	CONTACT		n	BRASS		t=0.64

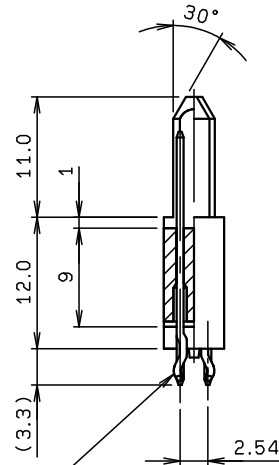

型番 P/N: 00 9072 2XX 301 800 +


極数 NO. OF POS
20 : 20PIN
30 : 30PIN
バリエーション VARIATION
30 : 基板間 12mm用
めっき PLATING
800 + : Sn-Cu

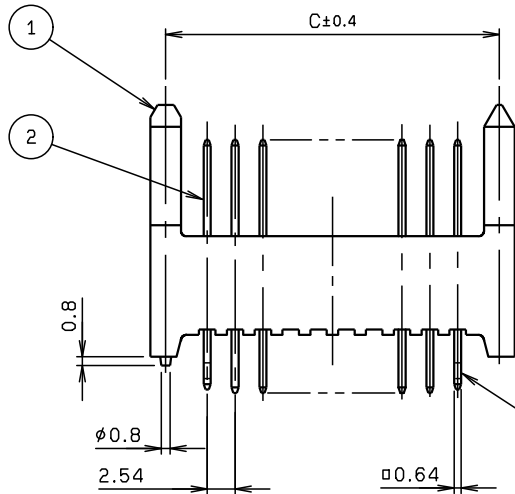


キंक加工 (両端各2本)
WITH KINKED (EACH TWO PINS. AT BOTH ENDS.)

SECT. X-X

寸法表 DIMENSION			
極数 NO. OF POS	A	B	C
20	22.86	33.26	30.46
30	35.56	45.96	43.16

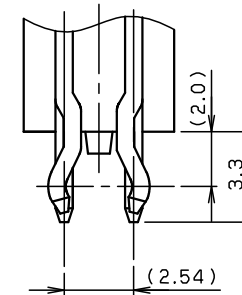

キंक部詳細 (S=5:1)
KINKED AREA

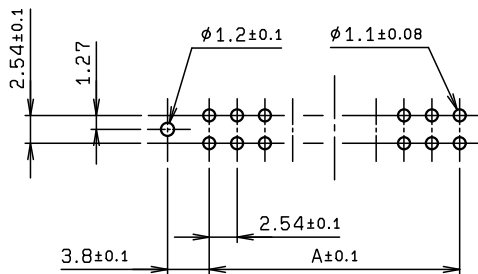

基板穴配図
MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S) ±0.3		PRODUCT SPEC / 製品規格 UNIT mm SCALE 2 : 1		ANGLE 3RD DATE 2003/11/27		B	DCN21266	2021/03/31	Y. KITAMURA	K. MIYAMOTO	M. YOSHIDA
						A	DCN19925	2019/09/03	Y. KITAMURA	K. MIYAMOTO	M. YOSHIDA
						O	EDN-951	2003/11/27	C. YAMATO		K. ONO
						NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
DRAWN T. KOMATSU		DESIGNED C. YAMATO		CHECKED K. ONO		PART NAME / 品名 SERIES 9072 STACKING ASSY ST DIP 30P					
						PART NO. / 型番 00 9072 2XX 301 800 +					
DWG NO. / 図番 BJS 9072064		APPROVED K. ONO		DWG NO. / 図番 BJS 9072064		SHEET/REV 1/1 B					

KYOCERA