
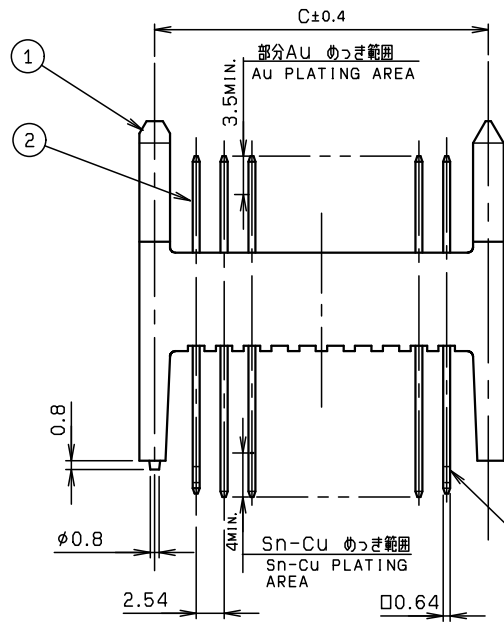
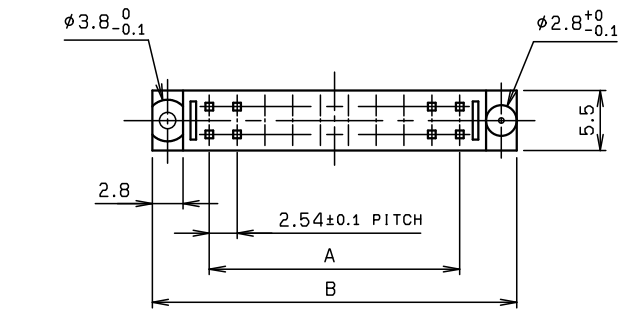


キंक加工 (両端各2本)
WITH KINKED
(EACH TWO PINS AT BOTH ENDS)

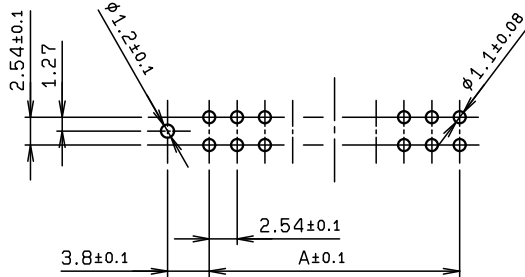


基板穴配列図
MOUNTING LAYOUT

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	POST INSULATOR		1	GF PBT		COLOR:WHITE
2	POST CONTACT		N	BRASS		

型番 P/N	極数 NO. OF POS.	A	B	C
00 9072 220 X01 XXX +	20	22.86	33.26	30.46
↑ 30	30	35.56	45.96	43.16
40	40	48.26	58.66	55.86
↓ 50	50	60.96	71.36	68.56
00 9072 260 X01 XXX +	60	73.66	84.06	81.26

型番 P/N	D
00 9072 2XX 301 XXX +	12.0
↑ 4	15.0
↓ 5	18.0
00 9072 2XX 101 XXX +	20.0

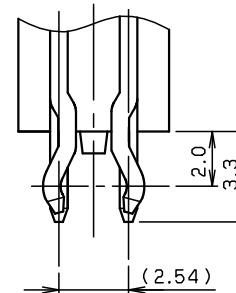

キंक部詳細 (S=5:1)
DETAIL OF KINK AREA

型番
P/N 00 9072 2XX X01 XXX +
極数
NO. OF POS.
基板間バリエーション
STACKING VARIATION
めっきコード
PLATING CODE
NI UNDER COAT
883+: CONTACT AREA Au 0.1μmMIN.
885+: CONTACT AREA Au 0.25μmMIN.
TAIL AREA Sn-Cu

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格		C	DCN21266	2021/03/31	Y. KITAMURA	K. MIYAMOTO	M. YOSHIDA
X < 10 ±0.2				B	DCN-933	2006/08/24	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI
10 ≤ X < 30 ±0.25		UNIT		O	EDN-870	2004/08/03	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		SCALE		PART NAME / 品名					
±3°		2 : 1		SERIES 9072 STAC ASSY ST DIP					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
LI		M. YOSHIDA		Y. SHIROYAMA		N. HAYASHI		00 9072 2XX X01 XXX +	
								DWG NO. / 図番	
								BJS 9072065	
								SHEET/REV	
								1/1 C	

KYOCERA