

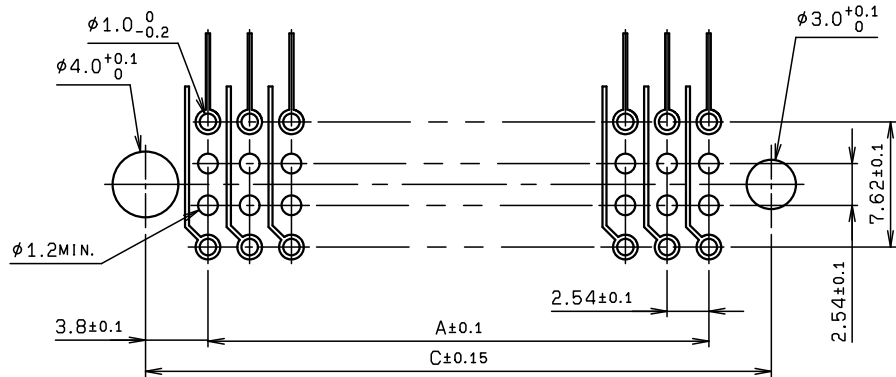
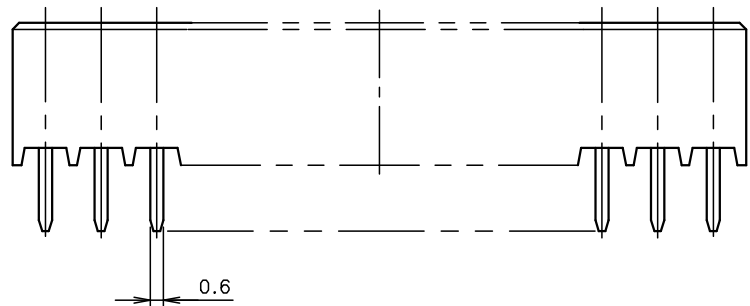


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	GF PBT		COLOR:WHITE
2	CONTACT		N	PHOS-BRONZE		

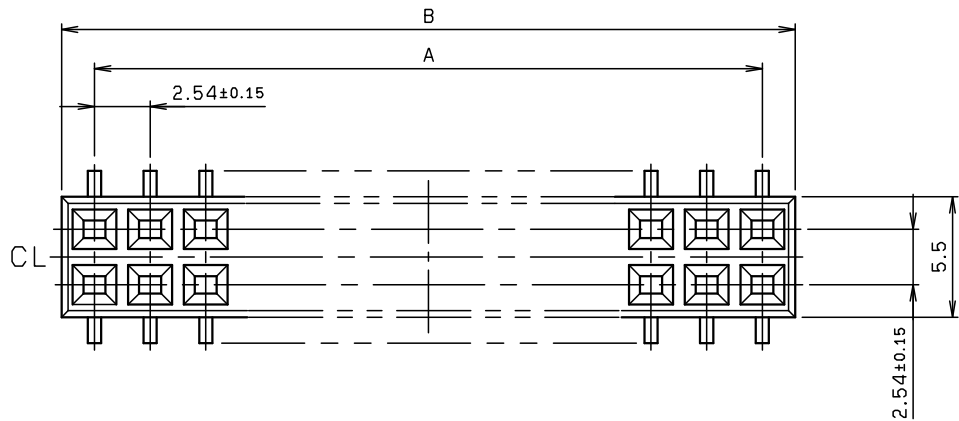


基板穴配列図
MOUNTING LAYOUT

極数 NO. OF POS.	A	B	C
20	22.86	25.86	30.46
30	35.56	38.56	43.16
40	48.26	51.26	55.86
50	60.96	63.96	68.56
60	73.66	76.66	81.26

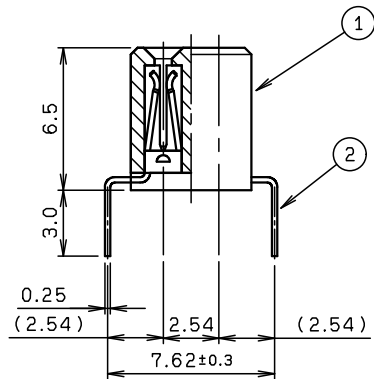

注 記
NOTE

1. 端子強度は下記の方法にて1往復後、折損のないこと。
CONTACT STRENGTH : CONTACT SHALL NOT BE BROKEN BY ONE MOVEMENT AS BELOW



2. 型番
P/N 00 9072 2XX 901 XXX +

極数
NO. OF POS.

めっきコード
PLATING CODE

NI UNDER COAT

883+: CONTACT AREA AU 0.1μmMIN.

885+: CONTACT AREA AU 0.25μmMIN.

TAIL AREA Sn-Cu OR Sn

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		D	DCN21266	2021/03/31	Y. KITAMURA	K. MIYAMOTO	M. YOSHIDA
X < 10 ±0.2				C	DCN-977	2013/07/19	M. YOSHIDA		T. MORI
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-870	2004/08/03	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 4 : 1		PART NAME / 品名					
DRAWN LI		DESIGNED M. YOSHIDA		CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		SERIES 9072 REC ASSY ST DIP	
								BOTTOM ENTRY	
								PART NO. / 型番	
								00 9072 2XX 901 XXX +	
								DWG NO. / 図番	
								BJS 9072066	
								SHEET/REV	
								1/1 D	

KYOCERA