１．適用範囲
本仕様書は、６２１２／６２６２シリーズ コネクターの組立製品の
エンボステープ梱包に適用する。

２．対象製品型番　２／２頁参照

３．梱包副資材　　２／２頁参照

４．梱包方法

（１）エンボステープ梱包
①エンボステープポケットへ製品をエンボス Assy's 図に表記された
向きに１個ずつ詰め、トップテープを上面にヒートシーリングして
リールに巻き取る。
②リール巻き仕様
図のようにエンボステープの巻き始め２００mm をダミーとして
巻き取り芯に粘着テープで止める。
製品を２，０００個実装した後、更に巻き終わり４００mm 以上の
ダミー部を設ける。
最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。

（２）外装箱梱包
①製品を詰めたリールを外装箱に段重ねに収納する。
②上部空間には緩衝材を詰める。
③外装箱の封は市販粘着テープで行う。
④現品票を側面に貼付する。

現品票記入項目　対象型番
ロット番号
数量

１．Scope
This specifies embossed packaging for assembly of connector of series 6212/6262.

２．Part number of applicable products　(See page 2/2)

３．Packaging material　(See page 2/2)

４．Packaging method

（１）Packaging of embossed tape（Fig.1）
①Put a connector into the pocket, seal the top tape, and reel it.

②Fix the start of the top tape with an adhesive tape.
Let the start of the embossed tape 200mm be no components
Put 2,000pcs. connectors into the pocket.
Let the end of the embossed tape 400mm be no components.
Fix the end of the tape with an adhesive tape and stick a slip.

（２）Packaging of outer carton（Fig.２）
①Pack reels with connectors packaged in an outer carton.
②Place an air packing on the top of reels.
③Fix the outer carton with an adhesive tape sold in the market.
④Stick a slip on the side face.

☆A slip shall be filled in the part number, lot number and Q'ty.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN－	1995/06/21	Y.YAMAZAKI	Y.KOSHIMIZU	M.ICHIHARA
W	ADD TO NOTE	DCN－1022	2016/11/22	A. MURATA	F. IKEGAMI	Y. FUJII
X	DELETE NOTE	DCN－553	2017/06/01	A. MURATA	F. IKEGAMI	Y. FUJII
Y	CHANGE OF POS.	DCN19327	2019/05/17	A.MURATA	N.KITAGAWA	Y.FUJII

2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL			4.梱包収納数 Q'ty			
	PACKAGING MATERIAL	P/N	Size	極数 Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
08 6212 0** *** 8** **	Embossed tape of 16/24/32/44mm wide	98 6212 0** 000 000 **	12Pitch	5~6P (16W)	2,000	14,000	26,000
08 6212 3** *** 8** *	Top tape of 16/24mm wide	95 9300 0018 60 011/012	T0.06×13.3/21.3mm wide	7~24P (24W)	2,000	10,000	20,000
08 6262 0** *** 8** *	Top tape of 32/44mm wide	95 9300 0018 60 013/014	T0.06×26.5/38.5mm wide	25~30P (32W)	2,000	8,000	14,000
08 6262 4** 340 8** *	Emboss reel of 16/24mm wide	95 9300 0018 40 122/123	φ330：17.5/25.5mm wide	31~40P (44W)	2,000	6,000	10,000
	Emboss reel of 32/44mm wide	95 9300 0018 40 124/125	φ330：33.5/45.5mm wide				
08 6212 0** **0 800 AW*	Outer carton (Small)	95 9300 0018 20 052	335mm×335mm×H165mm	SUFFIX：AW			
	Outer carton (Large)	95 9300 0018 20 096	335mm×335mm×H296mm	7,8P(16W)	2,000	14,000	26,000

Fig 1

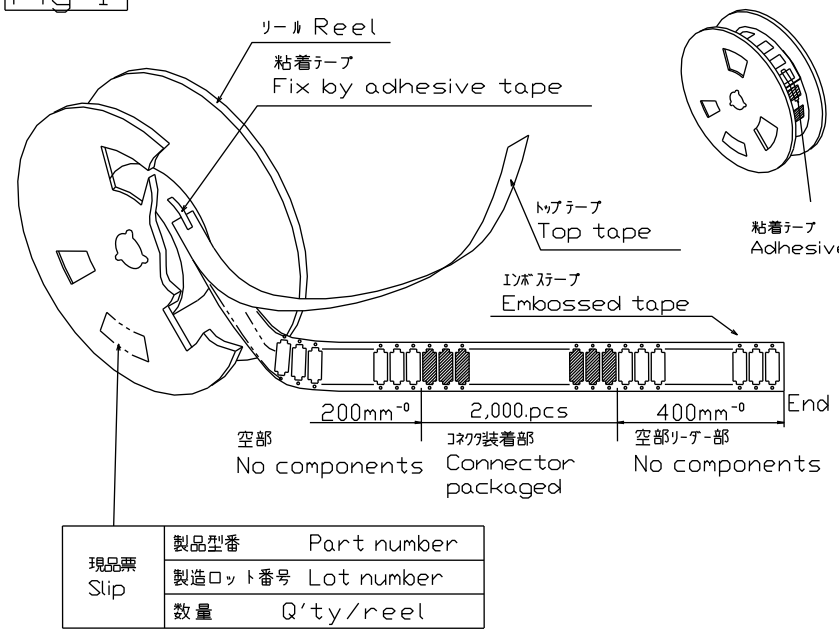

Fig 2

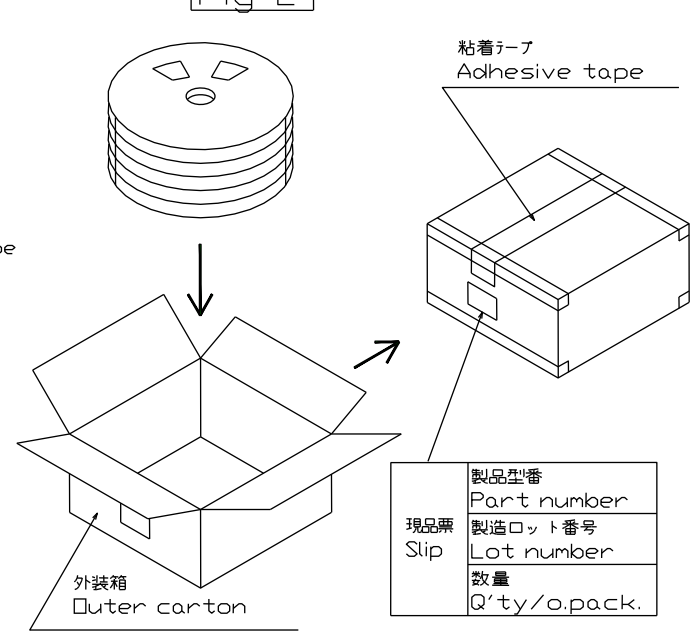

305－03－105