




2.0 × 1.6mm for Automotive

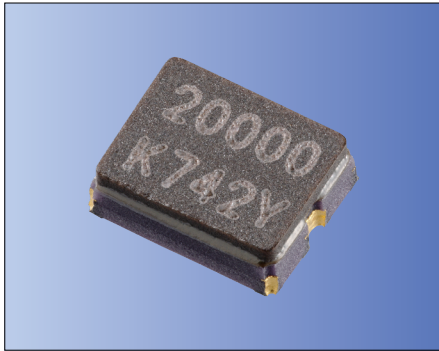

AEC-Q200 RoHS Compliant
PSL: R4Y MSL1

How to Order

CX2016GR 25000 D0 H S S CC
① ② ③④ ⑤ ⑥ ⑦ ⑧

- ① Series (Type and Size)
- ② Frequency (16,000 to 50,000kHz)
- ③④ Load Capacitance (Unit:pF) Ex.: D1:8.1pF

③ Integer part		④ After the decimal point	
D	8	0	.0
E	9	1	.1
F	10	2	.2
G	11	3	.3
H	12	4	.4
Z	Special suffix	5	.5
		6	.6
		7	.7
		8	.8
		9	.9

Packaging
(Tape & Reel 3000/ 15000 pcs./ reel)

⑤ Frequency Tolerance

H	±20×10 ⁻⁶
J	±25×10 ⁻⁶
K	±30×10 ⁻⁶
M	±40×10 ⁻⁶
P	±50×10 ⁻⁶
W	All Over
Z	Special suffix

Features

- Crystal unit for automotive electronics
- Ultra-miniature and low profile (2.0 × 1.6 × 0.715mm)
- Ceramic package
- Reflow compatible
- Durable, all-ceramic package, ideal for applications involving resin or epoxy over coating.
- Acceptable heat cycle solder junction for 3000 cycle (- 40 to +125° C)

⑥ Operating Temp. Range ⑦ Frequency Temp. Stability

⑥	⑦	S	T	V	W
		±50ppm	±100ppm	±150ppm	±200ppm
P	-40 to 85°C	✓	✓	✓	✓
R	-40 to 105°C	✓	✓	✓	✓
S	-40 to 125°C		✓	✓	✓
T	-40 to 150°C			✓	✓

⑧ Individual Specification (STD Specification is "CC" .)

Applications

- ECU • Automotive Camera • Radar

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	16000 to 50000	kHz	Please contact us for other frequency range.
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other CL requirements.
Frequency Tolerance	f _{tol}	± 50	× 10 ⁻⁶	25° C ± 3° C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	10 μ W(200 μ W max.)	μ W	
Operating Temp. Range	T _{use}	- 40 to +150	° C	
Storage Temp. Range	T _{stg}	- 40 to +150	° C	
Frequency Temp. Characteristics	f _{tem}	± 150	× 10 ⁻⁶	Freq. deviation from the value at 25° C
Shunt capacitance	C0	2.0max.	pF	


◆ Table 1
Motional Series Resistance ESR (C1)

Frequency (MHz)	ESR (Ohm)
16 ≤ F < 18	300
18 ≤ F < 20	200
20 ≤ F < 40	100
40 ≤ F ≤ 50	50

Please contact us for other specifications.

Dimensions

(Unit: mm)

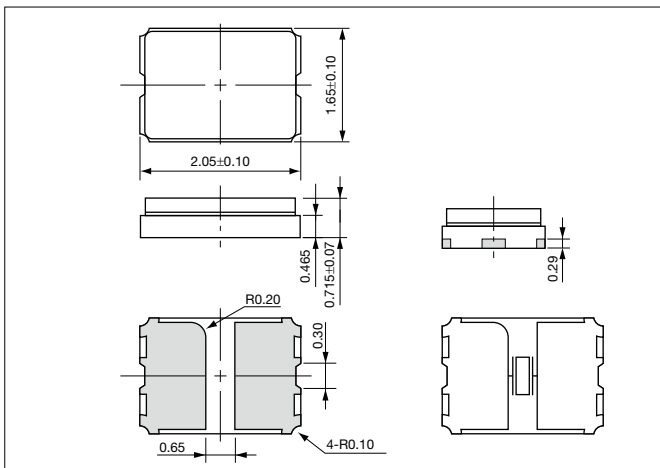

Recommended Land Pattern

(Unit: mm)

