

Specification

| | |
|--------------|-------------------------|
| Drawing No. | TNY1T-H1-DEC01-00 [1/7] |
| Issued Date. | 3-Jun-25 |

TO:

Note: In case of specification change, KYOCERA Part Number also will be changed.

| | |
|-------------------------------|------------------------|
| Product Name | Crystal Oscillator |
| Product Model | _____ |
| Frequency | 32.768kHz |
| Customer Part Number | --- |
| Customer Specification Number | _____ |
| KYOCERA Part Number | KC2016K32K7680C13A00 |
| Remarks | RoHS Compliant / MSL 1 |

Customer Acceptance

| | | |
|------------------|------------------|--|
| Accept Signature | Accept Date | |
| | Department | |
| | Person in charge | |

Seller
KYOCERA Corporation
Corporate Electronic Components Group
Electronic Components Sales Division
6 Takeda Tobadono-cho, Fushimi-ku, Kyoto
612-8501 Japan
TEL. No. 075-604-3500
FAX. No. 075-604-3501

Manufacturer
KYOCERA Corporation
Corporate Electronic Components Group
RF Devices Division
Yamagata higashine Plant
5850, Higashine-koh, Higashine-shi, Yamagata 999-3701
Japan
TEL. No. 0237-43-5611
FAX. No. 0237-43-5615

| | | | | |
|---|-------------------|-------------|------------|-----------|
| Design Department | Quality Assurance | Approved by | Checked by | Issued by |
| Crystal Components Application Engineering Section2 RF Devices Engineering Department 1 RF Devices Division | | | | |

1. Scope

This specification shall be defined of the Clock Oscillator for the integrated circuits (ICs).

2. Customer Part Number

3. KYOCERA Part Number**KC2016K32K7680C13A00****4. Electrical Characteristics**

4-1. Absolute Maximum Rating

| Item | Symbol | Rated Value | Units |
|----------------------|-----------|------------------------|-------|
| Power Supply Voltage | V_{CC} | -0.3 to +4.5 | V |
| Input Voltage | V_{IN} | -0.3 to $V_{CC} + 0.3$ | V |
| Storage Temperature | T_{STG} | -55 to +125 | °C |

Note:

If the part is used beyond absolute maximum ratings, it may cause internal destruction. The part should be used under the recommended operating conditions the reliability of this part may be damaged if those conditions are exceeded.

4-2. Recommended Operating Conditions

| Item | Symbol | Min | Typ | Max | Units | Remarks |
|-----------------------|-----------|-----|-----|----------|-------|---------|
| Power Supply Voltage | V_{CC} | 1.6 | 3.3 | 3.63 | V | |
| Input Voltage | V_{IN} | 0 | --- | V_{CC} | V | |
| Operating Temperature | T_{OPR} | -40 | 25 | +125 | °C | |

4-3. Electrical Characteristics

| Item | Symbol | Min | Typ | Max | Units | Remarks |
|---|-------------|---------------------|--------|---------------------|-------|---------------------------------------|
| Output Frequency | F_O | -- | 32.768 | -- | kHz | |
| Frequency Tolerance* | F_{tol} | -90 | --- | +90 | ppm | |
| Aging | F_{Aging} | -3 | --- | +3 | | 1year@+25°C |
| Other | F_{Oth} | -4 | --- | +4 | | Load change, shock and vibration |
| Current Consumption (NoLoad/ 1.6≤V _{CC} ≤2.0V) | I_{CC} | --- | --- | 28 | μA | |
| Current Consumption (NoLoad/ 2.0<V _{CC} ≤2.8V) | | --- | --- | 29 | | |
| Current Consumption (NoLoad/ 2.8<V _{CC} ≤3.63V) | | --- | --- | 30 | | |
| Standby Current | I_{ST} | --- | --- | 5 | μA | |
| Symmetry (Duty Ratio) | SYM | 45 | 50 | 55 | % | @50% V _{CC} |
| Rise Time/ Fall Time (10% V _{CC} to 90% V _{CC}) | T_r / T_f | -- | -- | 50 | ns | |
| Output Voltage-"L" | V_{OL} | --- | --- | 10% V _{CC} | V | $I_{OL}=1mA$ |
| Output Voltage-"H" | V_{OH} | 90% V _{CC} | --- | --- | V | $I_{OH}=-1mA$ |
| Output Load | CL | --- | --- | 15 | pF | CMOS |
| Input Voltage-"L" | V_{IL} | --- | --- | 30% V _{CC} | V | |
| Input Voltage-"H" | V_{IH} | 70% V _{CC} | --- | --- | V | |
| Output Disable Time | t_{dis} | --- | --- | 100 | ns | |
| Output Enable Time | t_{ena} | --- | --- | 2 | ms | |
| Start-up Time | t_{sta} | --- | --- | 5 | ms | @Minimum operating voltage to be 0sec |

Note: All electrical characteristics have defined on the maximum loaded and recommended operating conditions.

*Include initial tolerance(@+25°C) and operating temperature range and Rated Power supply voltage change (V_{CC}±10%)

Table 1

4-4. Measurement Condition


The reference temperature shall be +25±2°C. The measurement shall be performed at the temperature range of +5 °C to +35 °C unless otherwise the result is doubtful.

4-5. Measurement Circuit

The electrical characteristics shall be measured by test circuit "Fig. 1".

4-6. Clock Timing Chart

The clock timing chart is "Fig. 2".

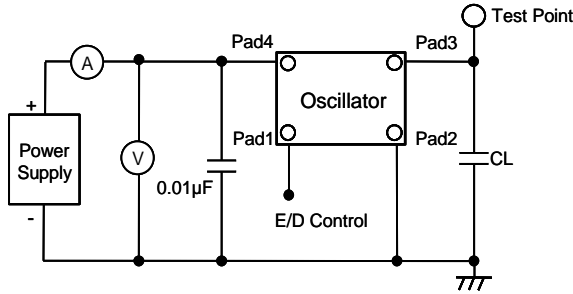

Note: CL includes probe and test fixture capacitance

Fig.1 Test Circuits



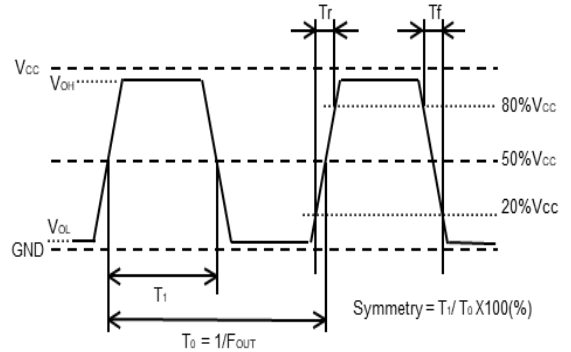


Fig.2 Clock Timing Chart (C-MOS Output)

5. Dimensions and Marking

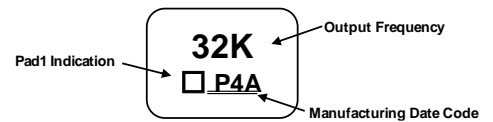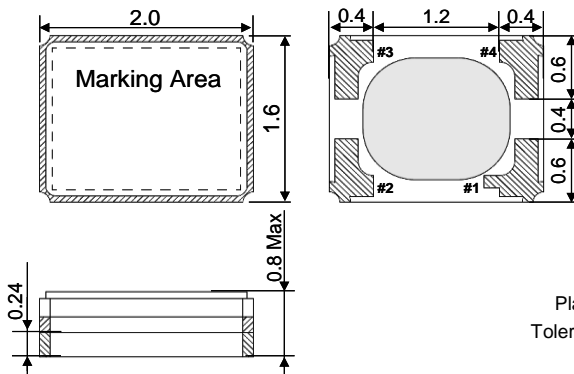

Output Frequency

The output frequency 32.768kHz is indicated "32K"

Plating Ni+Au

Tolerance: +/-0.2

Unit:(mm)

Manufacturing Date Code

| Year | Code | Year | Code | Month | Code | Day | Code | Day | Code | Day | Code |
|------|------|------|------|-------|------|-----|------|-----|------|-----|------|
| 2020 | W | 2031 | L | 1 | 1 | 1 | 1 | 11 | B | 21 | M |
| 2021 | A | 2032 | M | 2 | 2 | 2 | 2 | 12 | C | 22 | N |
| 2022 | B | 2033 | N | 3 | 3 | 3 | 3 | 13 | D | 23 | P |
| 2023 | C | 2034 | P | 4 | 4 | 4 | 4 | 14 | E | 24 | Q |
| 2024 | D | 2035 | Q | 5 | 5 | 5 | 5 | 15 | F | 25 | R |
| 2025 | E | 2036 | R | 6 | 6 | 6 | 6 | 16 | G | 26 | S |
| 2026 | F | 2037 | S | 7 | 7 | 7 | 7 | 17 | H | 27 | T |
| 2027 | G | 2038 | T | 8 | 8 | 8 | 8 | 18 | J | 28 | V |
| 2028 | H | 2039 | V | 9 | 9 | 9 | 9 | 19 | K | 29 | W |
| 2029 | J | 2040 | W | 10 | A | 10 | A | 20 | L | 30 | X |
| 2030 | K | 2041 | A | 11 | B | 11 | B | | | 31 | Y |
| | | | | 12 | C | | | | | | |

It repeats from A in 2041 and after wards.

e.g. : "P4A" means "Apr-10-2034"

Table 2

| Pad arrangement | |
|-----------------|-------------------|
| 1 | Stand-by Function |
| 2 | Case GND |
| 3 | Output |
| 4 | V _{CC} |

| Stand-by Function | |
|-------------------|-------------------------|
| Pad1 | Pad3 (Output) |
| OPEN | Active |
| "H" Level | Active |
| "L" Level | High Z (No-Oscillation) |

6. Parts Numbering Guide

KC2016K 32K7680 C 1 3 A 00

A B C D E F G

A. Series (SMD Oscillator)

B. Output Frequency

C. Output

C: C-MOS

D. Supply Voltage

1: 1.8V/ 2.5V/ 3.3V Compatible

E. Frequency Tolerance*

4-3. Electrical Characteristics reference

F: Symmetry (Duty Ratio) and Stand-by Function

A: Symmetry: 45% to 55% with Stand-by Function

G. Suffix for Individual Requirements

(STD Specification is "00")

Packing (Tape & Reel 2,000pcs/Reel)


7. Environmental Characteristics

| Items | Conditions | Criteria of Acceptance |
|---------------------------------|---|---|
| 7-1. Solderability | Soaking: +245±5°C, 5.0±0.5sec | Dipped potion: Minimum 95% coverage |
| 7-2. Soldering Heat Resistance | Reflow soldering: Peak +260°C max, 10sec, Twice max | Without looseness or crack etc |
| 7-3. Temperature Cycle | 10cycles: -55°C to +125°C (30minuts each/ cycle) | Clause 7-10 shall be satisfied. |
| 7-4. Mechanical Shock (Pulse) | 5 times 14,750m/sec ² (1,500G), Duration of pulse 0.5msec (MIL-STD-883D-2002.3 Condition B) | |
| 7-5. Vibration | 4 times each axis X, Y, Z: 20 to 2,000Hz and 2,000Hz to 20Hz/cycle Peak acceleration 196m/sec ² (20G) (MIL-STD-883D-2007.2 Condition A) | |
| 7-6. High Temperature | 1000 hours: Temperature: +85+5/-3°C | |
| 7-7. Low Temperature | 1000 hours: Temperature: -40+5/-3°C | |
| 7-8. Humidity Cycle | 10 cycles: Based on 1004 specifications (MIL-STD-883D-1004.7) | Clause 7-1 shall be satisfied. |
| 7-9. Hermeticity 1 (Gross leak) | Soaking: +125°C, 5minutes | No bubbles appeared |
| 7-10. Hermeticity 2 (Fine leak) | Measured by Helium Detector Equipment (MIL-STD-883D-1014.10 Condition A1) | 5x10 ⁻⁹ Pa m ³ /sec max |

After each testing, the parts shall be subjected to standard atmospheric conditions more than 2 hours. After that, the electrical characteristics shall be measured. The result of the test shall be satisfied **Table 1**.

Table 3


8. Recommended Land pattern and Soldering Guide

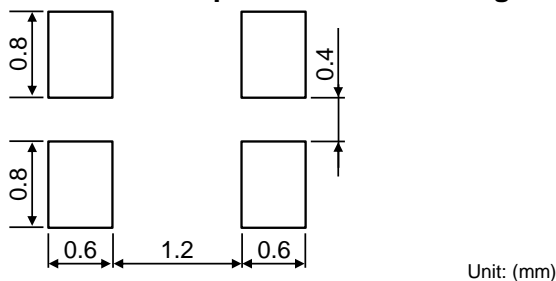

Note:

Since the part doesn't have Bypass Capacitor between V_{cc} and GND, Please mount high frequency type capacitor 0.01µF to the nearest position of oscillator.


Fig.3 Land pattern

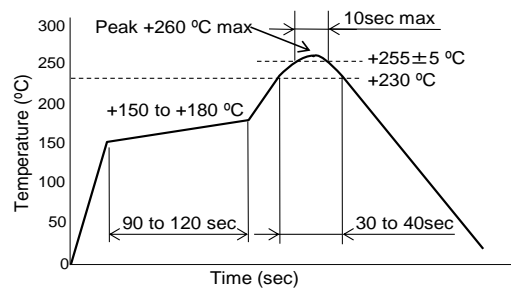

Available Reflow times: Maximum twice

Fig.4 Reflow profile (Lead Free Available)


9. Taping Specifications

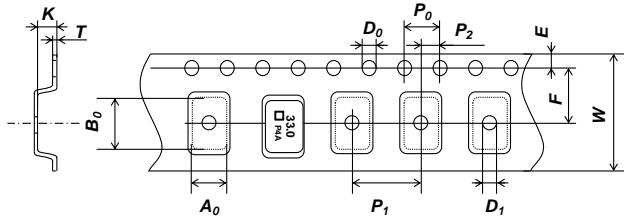

Unit: (mm)

| | | | | | |
|------------|----------------------|----------------------|----------------------|----------------------|----------|
| Symbol | A₀ | B₀ | W | F | E |
| Dimensions | 1.8±0.05 | 2.25±0.05 | 8.0±0.2 | 3.5±0.05 | 1.75±0.1 |
| Symbol | P₁ | P₂ | P₀ | D₀ | T |
| Dimensions | 4.0±0.1 | 2.0±0.05 | 4.0±0.1 | 1.5+0.1/-0 | 0.2±0.05 |
| Symbol | K | D₁ | | | |
| Dimensions | 0.9±0.1 | 1.1±0.1 | | | |

Fig.5 Emboss Carrier Tape

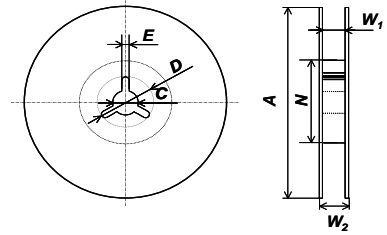

Unit: (mm)

| | | | |
|------------|----------------------|----------|----------------------|
| Symbol | A | N | W₁ |
| Dimensions | 180 +0/-1.5 | 60+1/-0 | 9.0+0.3/-0 |
| Symbol | W₂ | C | D |
| Dimensions | 11.4±1.0 | 13.0±0.2 | 21.0±0.8 |
| Symbol | E | | |
| Dimensions | 2.0±0.5 | | |


Fig.6 Reel

9-1. Taping Quantities

- The taping of per reel shall be packed 2,000 pcs.
- The parts shall be contained continuously in the pocket.

9-2. Leader and Blank Pockets

- The package shall be consisted of leader, blank pockets and loaded pocket as follows "Fig. 7".
- The power of peeling strength between top tape and carrier tape shall be 0.1N(10gf) to 1.0N(100gf) as follows "Fig. 8".

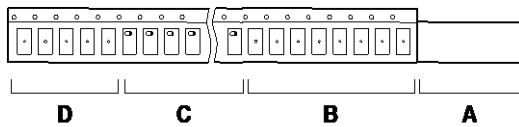

- A) Leader
- B) Blank Pocket (40mm to 320mm)
A+B: 400mm to 560mm
- C) Load Pocket
- D) Blank Pocket (160mm minimum)

Fig.7 Packing Method

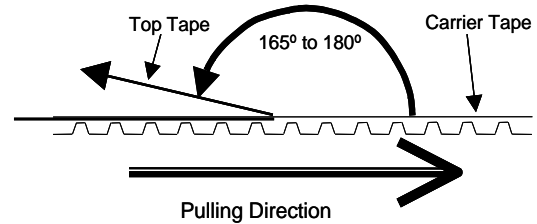


Fig.8 Peeling Strength

9-3. Reel Label

The reel label shall be consisted as below. (Based on EIAJ C-3 format)

- A) Customer Part Number
- B) Lot No.
- C) Quantities
- D) Shipping Date
- E) Vender Name

9-4. Exterior Package Label

The oscillator shall be packed properly to avoid defect in transportation. The exterior package label shall be consisted as below.

- A) Name of Customer
- B) P/O No.
- C) Customer Part Number
- D) Lot No.
- E) Quantities
- F) Shipping Date
- G) Vender Name

10. The agreement of this specifications

In case there is any obscure point or doubt concerning the contents of the specification, it shall be settled through consultation of both parties.

11. Quality guarantee

In case when Kyocera Corporation rooted failure occurred within 1year after its delivery, substitute product will be arranged based on discussion. Quality guarantee of product after 1year of its delivery is waived.

12. Remarks on Usages

A) Storage Conditions

The parts shall be stored in temperature range of -5 to +40°C, humidity 40 to 60% RH, and avoid direct sunlight. Then the parts shall be used within 6 months.

B) Handling Conditions

Although the part has protection circuit against static electricity, when excess static electricity is applied, the inside IC may get damaged.

Before mounting on the PCB, please make sure the direction of the part is correct. Otherwise the part of temperature will increase. And also the part will have some damages.

Please do not use the parts under the unfavorable condition such as beyond specified range in this specification.

Please do not use the parts under the condition, in the water or in the salt water also environment of dew or harmful gas.

Please make sure the condition of pick and place following pick up nozzle guideline.

Picking Method: Case of Head Unit 1.6 x 1.2mm (Inside Diameter)

The proper condition of pick and place will be different each equipment. Therefore, please check before testing.

C) Rework Condition

Please do not pick up Head Unit. We can't guaranty electrical performance and reliability.

D) Soldering Conditions

This product can respond to the general Pb-free reflow profile. The wave soldering cannot be supported.

E) Soldering in Mounting

In case of Solder paste and conductive glue contact product lid or product side face exception for product terminal it's possible to influence product characteristics.

Please be careful above contents.

F) Washing Conditions

Ultra sonic cleaning is available. However there is a possibility that Crystal in the part may cause damaged under certain condition. Therefore please test before using.

After washing, please dry the parts completely. Otherwise water drops between the parts and PCB may cause migration.

- G) This product can be used for general electronic equipment (information equipment, communication equipment, audiovisual equipment, measuring equipment, home appliances, etc.) Intended to be used. Equipment and systems (traffic equipment, safety equipment, aviation / space control, nuclear power control, life support equipment) that require special quality and reliability and whose failure or malfunction may endanger human life or harm the human body. (Including medical devices, etc.), basic driving functions (running, turning, stopping) and collision safety in traffic equipment, applications related directly or indirectly to collision safety, and applications that are expected to have a significant impact on property, etc. It is not intended to be used. In the unlikely event that this product is used for any of these purposes, we will not be liable for any damages resulting from such use.

In case of using this part without above precaution, Kyocera is unable to guarantee the specific characteristics.