


* Click the series number to check the product information

Sub. PCB (Disk Drive)

FPC/FFC Connectors

Height: 0.85~2.2mm



- 0.2mm Pitch
6866 Space-saving, Front-lock
- 0.3mm Pitch
6293 Lower-profile, Back-lock
6844 Space-saving, Front-lock
- 0.4mm Pitch
6824 Space-saving, Non-ZIF
- 0.5mm Pitch
6809 Ease of use, Robust, Front-lock
6811 Robust, Front-lock
6284 Non-ZIF
6806 Ease of use, Front-lock
6892 AOI-compatible, Front-lock

Shield Case

Shield Locks

Height: 1.8, 3.0mm




8069 Better work efficiency


Main – Sub. PCB (I/O)

FPC/FFC Connectors

Height: 0.85~5.32mm



- 0.2mm Pitch
6866 Space-saving, Front-lock
- 0.3mm Pitch
6293 Lower-profile, Back-lock
6844 Space-saving, Front-lock
- 0.4mm Pitch
6824 Space-saving, Non-ZIF
- 0.5mm Pitch
6809 Ease of use, Robust, Front-lock
6811 Robust, Front-lock
6284 Non-ZIF
6806 Ease of use, Front-lock
6892 AOI-compatible, Front-lock
6817 One-Action

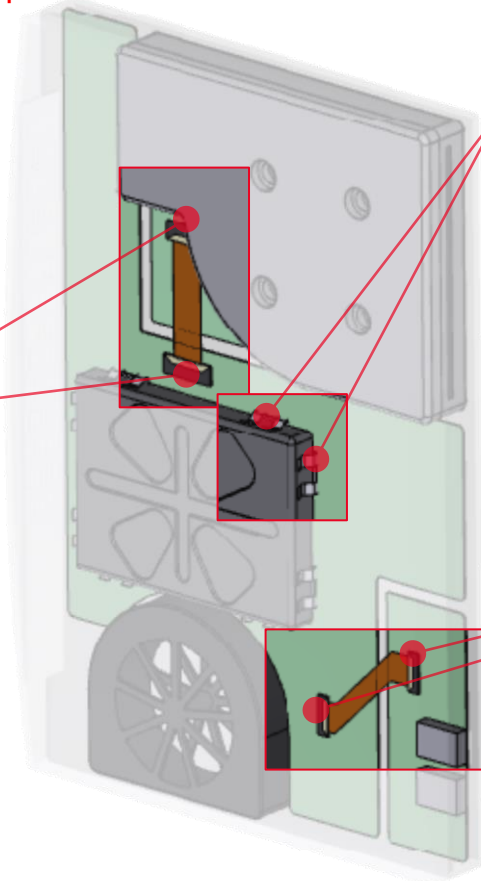

* Click the series number to check the product information

Control Button, Stick

FPC/FFC Connectors

Height: 0.85~5.32mm



● 0.5mm Pitch

6809 Ease of use, Robust, Front-lock

6811 Robust, Front-lock

6284 Non-ZIF

6806 Ease of use, Front-lock

6892 AOI-compatible, Front-lock

6244 Vertical, Non-ZIF

Battery

Board to Board Connectors

Stacking Height: 0.6~0.7mm




● 0.35mm Pitch

7129 Power 10A, Space-saving

Main – Sub. PCB (I/O)

FPC/FFC Connectors

Height: 0.85~5.32mm



● 0.3mm Pitch

6293 Lower-profile, Back-lock

6844 Space-saving, Front-lock

● 0.4mm Pitch

6824 Space-saving, Non-ZIF

● 0.5mm Pitch

6809 Ease of use, Robust, Front-lock

6811 Robust, Front-lock

6284 Non-ZIF

6806 Ease of use, Front-lock

6892 AOI-compatible, Front-lock

6244 Vertical, Non-ZIF

Vibrator

Wire to Board Connectors

Height: 0.9~3.61mm



8041 0.9mm Pitch

8040 1.0mm Pitch

8005 1.27mm Pitch

Speaker, Mic., Sensor

FPC/FFC Connectors

Height: 0.85~1.75mm



● 0.3mm Pitch

6293 Lower-profile, Back-lock

6844 Space-saving, Front-lock

● 0.4mm Pitch

6824 Space-saving, Non-ZIF

● 0.5mm Pitch

6277 Low pin count, Back-lock

6298 Low pin count, Back-lock

6809 Ease of use, Robust, Front-lock

6811 Robust, Front-lock

6284 Non-ZIF

6806 Ease of use, Front-lock

Board to Board Connectors

Stacking Height: 0.7~2.0mm



● 0.35mm Pitch

7129 Power 10A, Space-saving

5861 Power 5A, Lower-profile

5843 Stacking height variations

● 0.4mm Pitch

5804 Stacking height variations

* Click the series number to check the product information

Button, Speaker, Mic., Sensor

FPC/FFC Connectors

Height: 0.85~2.2mm



- 0.2mm Pitch
6866 Space-saving, Front-lock
- 0.3mm Pitch
6293 Lower-profile, Back-lock
6844 Space-saving, Front-lock
- 0.4mm Pitch
6824 Space-saving, Non-ZIF
- 0.5mm Pitch
6277 Low pin count, Back-lock
6298 Low pin count, Back-lock
6809 Ease of use, Robust, Front-lock
6811 Robust, Front-lock
6284 Non-ZIF
6806 Ease of use, Front-lock
6892 AOI-compatible, Front-lock

Board to Board Connectors

Stacking Height: 0.6~2.0mm



- 0.35mm Pitch
7129 Power 10A, Space-saving
5861 Power 5A, Lower-profile
5843 Stacking height variations
- 0.4mm Pitch
5804 Stacking height variations

Battery

Board to Board Connectors

Stacking Height: 0.7mm



- 0.35mm Pitch
7129 Power 10A, Space-saving

Vibrator

Wire to Board Connectors

Height: 0.9~3.61mm



- 8041** 0.9mm Pitch
- 8040** 1.0mm Pitch
- 8005** 1.27mm Pitch

Main – Sub. PCB, Display

FPC/FFC Connectors

Height: 0.85~2.2mm



- 0.2mm Pitch
6866 Space-saving, Front-lock
- 0.3mm Pitch
6293 Lower-profile, Back-lock
6844 Space-saving, Front-lock
- 0.5mm Pitch
6809 Ease of use, Robust, Front-lock
6811 Robust, Front-lock
6284 Non-ZIF
6806 Ease of use, Front-lock
6892 AOI-compatible, Front-lock

Board to Board Connectors

Stacking Height: 0.6~2.0mm



- 0.35mm Pitch
5861 Power 5A, Lower-profile
5863 Power 5A
5897 Power 3A, High pin count
5843 Stacking height variations
- 0.4mm Pitch
5804 Stacking height variations

* Click the series number to check the product information

Battery

FPC/FFC Connectors

Height: 1.5mm



- 0.5mm Pitch
- 6808** Power 4A, Back-lock

Board to Board Connectors

Stacking Height: 0.7mm



- 0.35mm Pitch
- 7129** Power 10A, Space-saving

Main PCB, Display

FPC/FFC Connectors

Height: 0.85~5.45mm



- 0.2mm Pitch
- 6866** Space-saving, Front-lock
- 0.3mm Pitch
- 6293** Lower-profile, Back-lock
- 6844** Space-saving, Front-lock
- 0.5mm Pitch
- 6277** Low pin count, Back-lock
- 6298** Low pin count, Back-lock
- 6809** Ease of use, Robust, Front-lock
- 6811** Robust, Front-lock
- 6817** One-Action
- 6244** Vertical, Non-ZIF
- 6251** Vertical, Flip-lock

Board to Board Connectors

Stacking Height: 0.6~2.0mm



- 0.35mm Pitch
- 5861** Power 5A, Lower-profile
- 5863** Power 5A
- 5897** Power 3A, High pin count
- 5843** Stacking height variations
- 0.4mm Pitch
- 5806** Space-saving
- 5804** Stacking height variations

Speaker, Mic.

FPC/FFC Connectors

Height: 0.85~0.95mm



- 0.2mm Pitch
- 6866** Space-saving, Front-lock
- 0.3mm Pitch
- 6293** Lower-profile, Back-lock
- 6844** Space-saving, Front-lock
- 0.5mm Pitch
- 6277** Low pin count, Back-lock
- 6298** Low pin count, Back-lock

Board to Board Connectors

Stacking Height: 0.6~2.0mm



- 0.35mm Pitch
- 5861** Power 5A, Lower-profile
- 5863** Power 5A
- 5897** Power 3A, High pin count
- 5843** Stacking height variations
- 0.4mm Pitch
- 5806** Space-saving
- 5804** Stacking height variations

Wire to Board Connectors

Height: 0.9~3.61mm



- 8041** 0.9mm Pitch
- 8040** 1.0mm Pitch
- 8005** 1.27mm Pitch