



**Quartz Crystal "CX2016DB series"**  
**KYOCERA Part Number : CX2016DB32000D0WZRC1**

Note: This is a preliminary specification.

If you would like to know official specification and details specification, please contact us.

1.RATINGS				
Items	SYMB.	Rating	Unit	Rmarks
Operating Temperature Range	Topr	-20 to +75	°C	
Storage Temperature Range	Topr	-40 to +85	°C	

2.Electrical Characteristics							
Item	Electrical Specification					Test Conditions	Remarks
	SYMB.	Min.	Typ.	Max.	Unit		
Mode of Vibration		Fundamental					
Nominal Frequency F0	F0		32		MHz		
Nominal Temperature	T <sub>NOM</sub>		+25		°C		
Load Capacitance	CL	8.0			pF		
Frequency Tolerance	df/F	-40.0		+40.0	PPM	+25±3° C	by Measurement Conditions
Frequency Temperature Characteristics	df/F					-20 to +75° C	Based on an oscillation frequency at + 25 °C
Frequency Aging Rate						1 <sup>st</sup> year	+25±3°C
Equyvalent Series Resistance	ESR			50	Ω		by Measurement Conditions
Shunt Capacitance	C0			3.0	pF		
Drive Level	Pb	0.01		100	μW		
Insulation Resistance	IR	500			MΩ	100V(DC)	

### 3.Measurement Condition

#### Frequency measurement


Measuring instrument	: IEC PI-Network Test Fixture
Load capacitance	:8.0pF
Drive Level	:10 $\mu$ W

#### Equivalent series resistance (ESR) measurement

Measuring instrument	: IEC PI-Network Test Fixture
Load capacitance	:Series
Drive Level	:10 $\mu$ W

### 4.Dimensions

(Unit:mm)

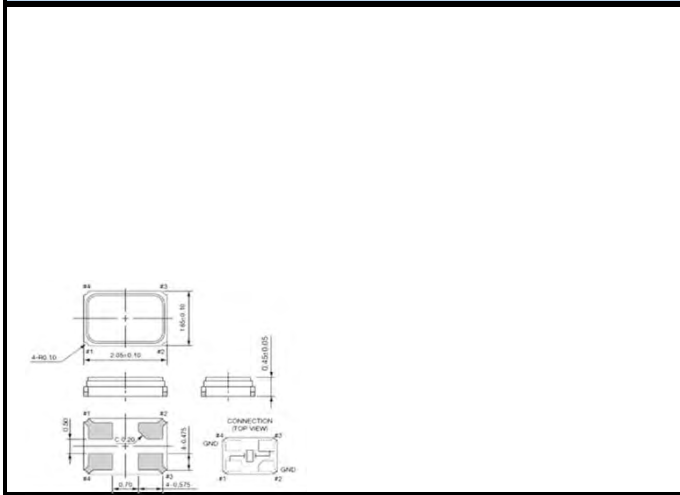

### 5.Recommended Land Pattern

(Unit:mm)

