



Quartz Crystal "CX2016SA series"

KYOCERA Part Number : CX2016SA32000D0WRQG1

Note: This is a preliminary specification.

If you would like to know official specification and details specification, please contact us.

1.RATINGS				
Items	SYMB.	Rating	Unit	Rmarks
Operating Temperature Range	Topr	-40 to +105	°C	
Storage Temperature Range	Topr	-40 to +125	°C	

2.Electrical Characteristics							
Item	Electrical Specification					Test Conditions	Remarks
	SYMB.	Min.	Typ.	Max.	Unit		
Mode of Vibration		Fundamental					
Nominal Frequency F0	F0		32		MHz		
Nominal Temperature	T _{NOM}		+25		°C		
Load Capacitance	CL	8.0			pF		
Frequency Tolerance	df/F	-30.0		+30.0	PPM	+25±3°C	by Measurement Conditions
Frequency Temperature Characteristics	df/F					-40 to +105°C	Based on an oscillation frequency at +25°C
Frequency Aging Rate						-2.0	+2.0
Equyvalent Series Resistance	ESR			60	Ω		by Measurement Conditions
Drive Level	Pb	0.01		200	μW		
Insulation Resistance	IR	500			MΩ	100V(DC)	

3.Measurement Condition

Frequency measurement


Measuring instrument : IEC PI-Network Test Fixture
Load capacitance :8.0pF
Drive Level :10 μ W

Equivalent series resistance (ESR) measurement

Measuring instrument : IEC PI-Network Test Fixture
Load capacitance :Series
Drive Level :10 μ W

4.Dimensions

(Unit:mm)

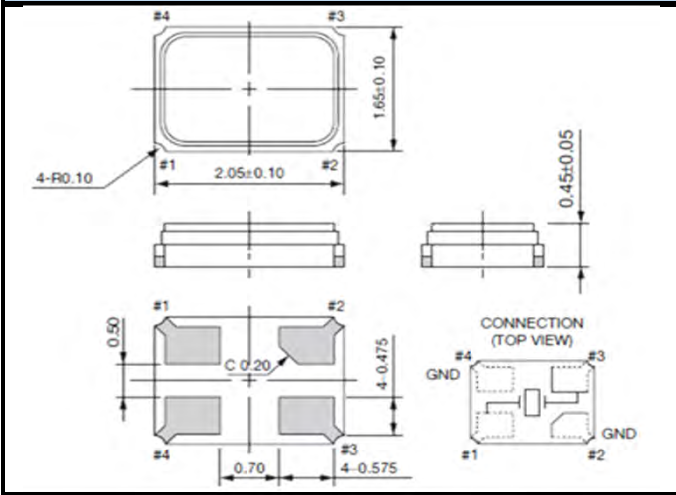

5.Recommended Land Pattern

(Unit:mm)

