




Clock Oscillators Surface Mount Type

KC3225L-H2/ KC3225L-H3 Series



HCSL/ 3.3V or 2.5V/ 3.2x2.5mm

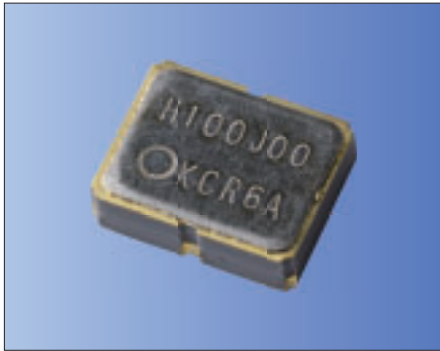

RoHS Compliant

Features

- Miniature ceramic package
- Highly reliable with seam welding
- HCSL output
- Supply voltage $V_{CC} = 3.3V, 2.5V$
- $\pm 25 \times 10^{-6}$ available
- Low Phase Noise

Table 1

| Freq. Tol. Code | Tol. $\times 10^{-6}$ | Operating Temperature Range (°C) | Note |
|-----------------|-----------------------|----------------------------------|--|
| 0 | ± 50 | 0 to +70 | Standard specifications |
| S | ± 30 | | |
| U | ± 25 | | |
| F | ± 100 | -40 to +85 | Please contact us for available frequencies. |
| G | ± 50 | | |
| 6 | ± 50 | -40 to +105 | |

How to Order

KC3225L 100.000 H J 00
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (HCSL)
- ④ Supply Voltage (3 : 3.3V or 2 : 2.5V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function
J : 45/ 55%, Stand-by
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 2000 pcs./ reel)

Specifications

| Item | Symbol | Conditions | Specifications | | | | Units |
|--|-------------|---|----------------|--------------|--------------|--------------|------------------|
| | | | KC3225L-H2 | | KC3225L-H3 | | |
| | | | Min. | Max. | Min. | Max. | |
| Output Frequency Range ^{Note1} | f_o | | 100 | 140 | 100 | 140 | MHz |
| Frequency Tolerance | f_{tol} | Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration | -50 | +50 | -50 | +50 | $\times 10^{-6}$ |
| Storage Temperature Range | T_{stg} | | -55 | +125 | -55 | +125 | °C |
| Operating Temperature Range | T_{use} | | 0 | +70 | 0 | +70 | °C |
| | | | -40 | +85 | -40 | +85 | |
| | | | -40 | +105 | -40 | +105 | |
| Max. Supply Voltage | — | | -0.3 | +4.0 | -0.3 | +4.0 | V |
| Supply Voltage | V_{CC} | | 2.375 | 2.625 | 2.97 | 3.63 | V |
| Current Consumption | I_{CC} | | — | 50 | — | 50 | mA |
| Stand-by Current | I_{std} | | — | 20 | — | 20 | μA |
| Symmetry | SYM | 50ohm @crossing point | 45 | 55 | 45 | 55 | % |
| Rise/ Fall Time 0.175V to 0.525V | t_r / t_f | 50ohm | — | 0.5 | — | 0.5 | ns |
| Low Level Output Voltage ^{Note2} | V_{OL} | | -0.15 | +0.15 | -0.15 | +0.15 | V |
| High Level Output Voltage ^{Note2} | V_{OH} | | +0.66 | +0.85 | +0.66 | +0.85 | V |
| Output Load | RL | HCSL Output | 50 | | 50 | | ohm |
| Low Level Input Voltage | V_{IL} | | — | 30% V_{CC} | — | 30% V_{CC} | V |
| High Level Input Voltage | V_{IH} | | 70% V_{CC} | — | 70% V_{CC} | — | V |
| Disable Time | t_{dis} | | — | 200 | — | 200 | ns |
| Enable Time | t_{ena} | | — | 10 | — | 10 | ms |
| Start-up Time | t_{str} | @Minimum operating voltage to be 0 sec. | — | 10 | — | 10 | ms |
| Deterministic Jitter | DJ | | — | 2 | — | 2 | ps |
| 1sigma Jitter | J_{Sigma} | Measured with Wavecrest SIA-3000 | — | 4 | — | 4 | ps |
| Peak to Peak Jitter | J_{PK-PK} | | — | 30 | — | 30 | ps |
| Phase Jitter | J_{Phase} | @100MHz $V_{CC} = 3.3V$ | — | 0.5 | — | 0.5 | ps |
| Phase Noise | — | @100MHz $V_{CC} = 3.3V$ | @10Hz offset | Typ. -77 | | dBc/ Hz | |
| | | | @100Hz offset | Typ. -107 | | | |
| | | | @1kHz offset | Typ. -130 | | | |
| | | | @10kHz offset | Typ. -142 | | | |
| | | | @100kHz offset | Typ. -149 | | | |
| | | | @1MHz offset | Typ. -150 | | | |
| | | | @10MHz offset | Typ. -152 | | | |


Note : All electrical characteristics are defined at the maximum load and operating temperature range.

Note1: Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Note2: DC characteristic

Dimensions

(Unit: mm)

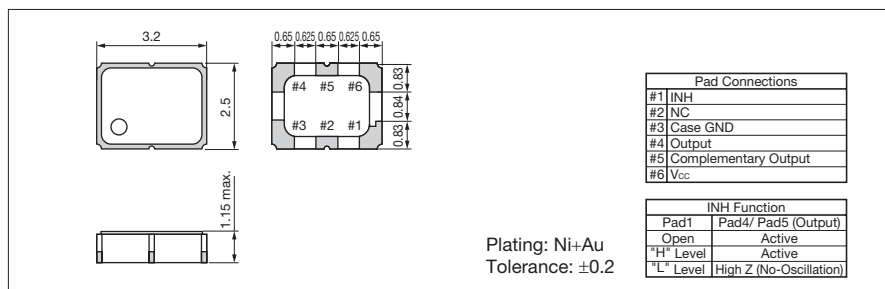

Recommended Land Pattern

(Unit: mm)

