



# Clock Oscillators Surface Mount Type KC7050P-L2/ KC7050P-L3 Series



**KYOCERA**

LVDS/ 3.3V or 2.5V/ 7.0×5.0mm



RoHS Compliant

## Features

- Miniature ceramic package
- Highly reliable with seam welding
- LVDS output
- Supply voltage Vcc=3.3V, 2.5V
- $\pm 25 \times 10^{-6}$  available
- Low Phase Noise

Table 1

Freq. Tol. Code	$\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	$\pm 50$	0 to +70	Standard specifications
S	$\pm 30$		
U	$\pm 25$		
F	$\pm 100$	-40 to +85	Please contact us for available frequencies.
G	$\pm 50$		
6	$\pm 50$	-40 to +105	

## How to Order

KC7050P 125.000 L □ □ J 00  
 ① ② ③ ④ ⑤ ⑥ ⑦

①Series

②Output Frequency

③Output Type (LVDS)

④Supply Voltage (3 : 3.3V or 2 : 2.5V)

⑤Frequency Tolerance (See Table 1)

⑥Symmetry/ INH Function

J : 45/ 55%

⑦Individual Specification

(STD Specification is "00".)

Packaging (Tape & Reel 1000 pcs./ reel)

## Specifications


Item	Symbol	Conditions	Specifications		Unit
			KC7050P-L2	KC7050P-L3	
Output Frequency Range <sup>Note1</sup>	fo		25 to 175		MHz
Frequency Tolerance	f <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	±50/ -40 to +105°C ±100/ -40 to +85°C ±50/ -40 to +85°C ±50/ 0 to +70°C ±30/ 0 to +70°C ±25/ 0 to +70°C		×10 <sup>-6</sup>
Storage Temperature Range	T <sub>stg</sub>		-55 to +125		°C
Operating Temperature Range	T <sub>use</sub>	Standard Specifications Extend (Option)	0 to +70/ -40 to +85 -40 to +105		°C
Max. Supply Voltage	—		-0.3 to +4.0		V
Supply Voltage	V <sub>cc</sub>		+2.375 to +2.625	+2.97 to +3.63	V
Current Consumption	I <sub>cc</sub>		50 max.		mA
Stand-by Current	I <sub>std</sub>		30 max.		μA
Symmetry	SYM	100ohm @crossing point	50±5		%
Rise/ Fall Time (20% V <sub>cc</sub> to 80% V <sub>cc</sub> Maximum Loaded)	Tr/ Tf	100ohm	0.6 max.		ns
Low Level Output Voltage <sup>Note2</sup>	V <sub>OL</sub>		0.9 min. Typ.:1.1		V
High Level Output Voltage <sup>Note2</sup>	V <sub>OH</sub>		1.6 max. Typ.:1.43		V
Differential Output Voltage <sup>Note2</sup>	V <sub>OD</sub>		247 to 454 Typ.:330		mV
Differential Output Voltage Error <sup>Note2</sup>	dV <sub>OD</sub>	dV <sub>OD</sub> = V <sub>OD1</sub> -V <sub>OD2</sub>	50 max.		mV
Offset Voltage	V <sub>os</sub>		1.125 to 1.375		V
Offset Voltage Error	dV <sub>os</sub>	dV <sub>os</sub> = V <sub>os1</sub> -V <sub>os2</sub>	50 max.		mV
Output Load	RL	LVDS Output	100		ohm
Input Voltage Range	V <sub>IN</sub>		0 to V <sub>cc</sub>		V
Low Level Input Voltage	V <sub>IL</sub>		30% V <sub>cc</sub> max.		V
High Level Input Voltage	V <sub>IH</sub>		70% V <sub>cc</sub> min.		V
Disable Time	t <sub>dis</sub>		200 max.		ns
Enable Time	t <sub>ena</sub>		10 max.		ms
Start-up Time	t <sub>str</sub>	@Minimum operating voltage to be 0 sec.	10 max.		ms
Deterministic Jitter	DJ		2 max.		ps
1 Sigma Jitter	J <sub>Sigma</sub>	Measured with Wavecrest SIA-3000	4 max.		ps
Peak to Peak Jitter	J <sub>PK-PK</sub>		30 max.		ps
Phase Jitter	J <sub>Phase</sub>	@156.25MHz V <sub>cc</sub> =3.3V	BW : 12kHz to 20MHz	0.3max.	ps

Note : All electrical characteristics are defined at the maximum load and operating temperature range.

Note1: Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Note2: DC characteristic

## Dimensions

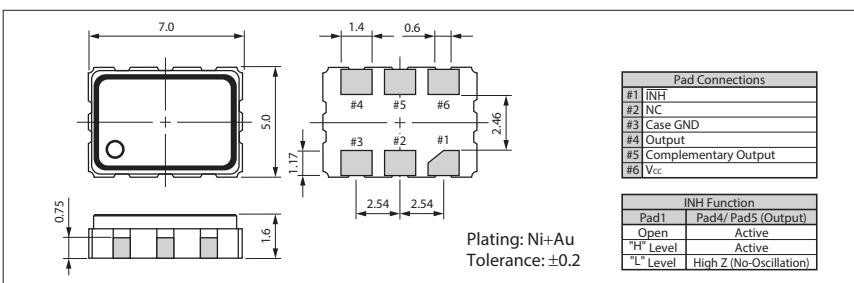

## Recommended Land Pattern

